



**PRODUCT NAME:**  
**'GLOBAL FISHER' Series**  
 PRE RINSE SUB ASSEMBLY + Add-On Pot Filler  
 NO TAP.

**PART NUMBER:**  
 GF2506 + OTHERS (see chart below to the Left)

**DESCRIPTION:**  
 'GLOBAL FISHER' PRE RINSE SUB ASSEMBLY  
 with ADD ON SPOUT +10 1/2" S/S RISER & S/S  
 ARMOURFLEX HOSE & FISHER SPRAY GUN

**TECHNICAL INFORMATION:**  
 - IDEAL WORKING PRESSURE 60 - 100 PSI  
 - Min. EFFECTIVE PRESSURE 45+ PSI  
 - MAX. PRESSURE = 200 PSI STATIC (in short periods)  
 - WORKING TEMPERATURE 5 C - 65 C  
 - SHIPPING WEIGHT 4.5KGS (approx)  
 - THREADED MECHANICAL JOINTS



**SUPPLIED WITH:**  
 - CP SPRAY GUN + HANDLE ( WELS 6 STAR)  
 - S/S ARMOURFLEX HOSE 915 mm LONG  
 - CP SPRING GUARD + RETAINER + HOOK + WALL BRACKET  
 - S/S 10 1/2 " RISER ABOVE POT FILLER  
 - CP BRASS ADD ON SPOUT (WELS 3 STAR)

**FEATURES:**

**HOSE:**  
 - 915MM LONG (36 INCHES)  
 - S/S END FITTINGS  
 - S/S ARMOURFLEX EXTERNAL JACKET  
 - 3 PLY FIBRE REINFORCED INTERNAL RUBBER HOSE  
 - HIGH QUALITY, HARD WEARING ROBUST HOSE

**SPRAY VALVE & HANDLE:**  
 - CHROME PLATED BRASS with INSULATED BLACK HANDLE  
 - FLAT CHROME PLATED METAL SQUEEZE LEVER WITH INSULATION COVERING & FLAT WIDE STOPPER.  
 - SQUEEZE LEVER IS CONSTANT IN MAINTAINING OF IT'S POSITION.  
 - QUICK RELEASE ON/OFF CLIP ON SQUEEZE LEVER FOR SAFETY.  
 - 15 DEGREE FLAT HIGH PRESSURE SPRAY FOR BEST CLEANING.

**ADDITIONAL SPRAY VALVE INFO**  
 - LOW ENERGY CONSUMPTION = **HIGH \$ SAVINGS**  
 - LOW WATER CONSUMPTION = **HIGH \$ SAVINGS**  
 - EXTREMELY ROBUST - ENGINEERED TO LAST  
 - INTERCHANGEABLE WITH MOST SIMILAR BRANDS AT HANDLE  
 (fits into 3/4"unf female handle)

**ADD-ON SPOUT - aka ADD-ON POT FILLER**  
 - CURRENT MODEL SUITS 'GLOBAL FISHER' & 'RINSE MAID'  
 - CP DIVERTER TAP BODY with RISER & SWIVEL SPOUTS TO SUIT

**WALL BRACKET:**  
 - CHROME PLATED ROD ADJUSTS FROM 50MM TO 300MM  
 - OPTIONAL ALL THREAD ROD ADJUSTMENT 50MM-200MM  
 - 3 SCREW HOLE BACK PLATE FOR EASY FIXING TO STUDS

**INDIVIDUAL COMPONENT PART NO.s**

- |                    |                     |
|--------------------|---------------------|
| 1. Hose            | GF2914              |
| 2. Handle          | G5208               |
| 3. Spray Valve     | GF2949-B            |
| 4. Riser           | GF8010              |
| 5. Wall Bracket    | GF8312              |
| 6. Spring Retainer | G533814HEX          |
| 7. Hook            | G8206               |
| 8. Spring Guard    | G8101               |
| 9. Add-On Spout    | G-506 + other sizes |


**WELS**  
**SPOUT** = 3.5 STAR, 9lpm      **SPRAY** = 6 STAR, 3.5lpm

**WATERMARK & WELS:**  
 Global Tapware Pty Ltd is a Watermarked, level 1, Company.  
 All relevant products & components are WELS registered.

**Special Notice:**

- 1 - We reserve the right to make changes to products and drawings without notice.
- 2 - All drawings & Documents are subject to copyright ©.
- 3 - Seek written consent by us to reprint / use for other than specification work.

**'GLOBAL FISHER' Series PT NO. - GF2506 + OTHER SIZES**  
**PRE RINSE SUB ASSEMBLY + ADD-ON SPOUT**

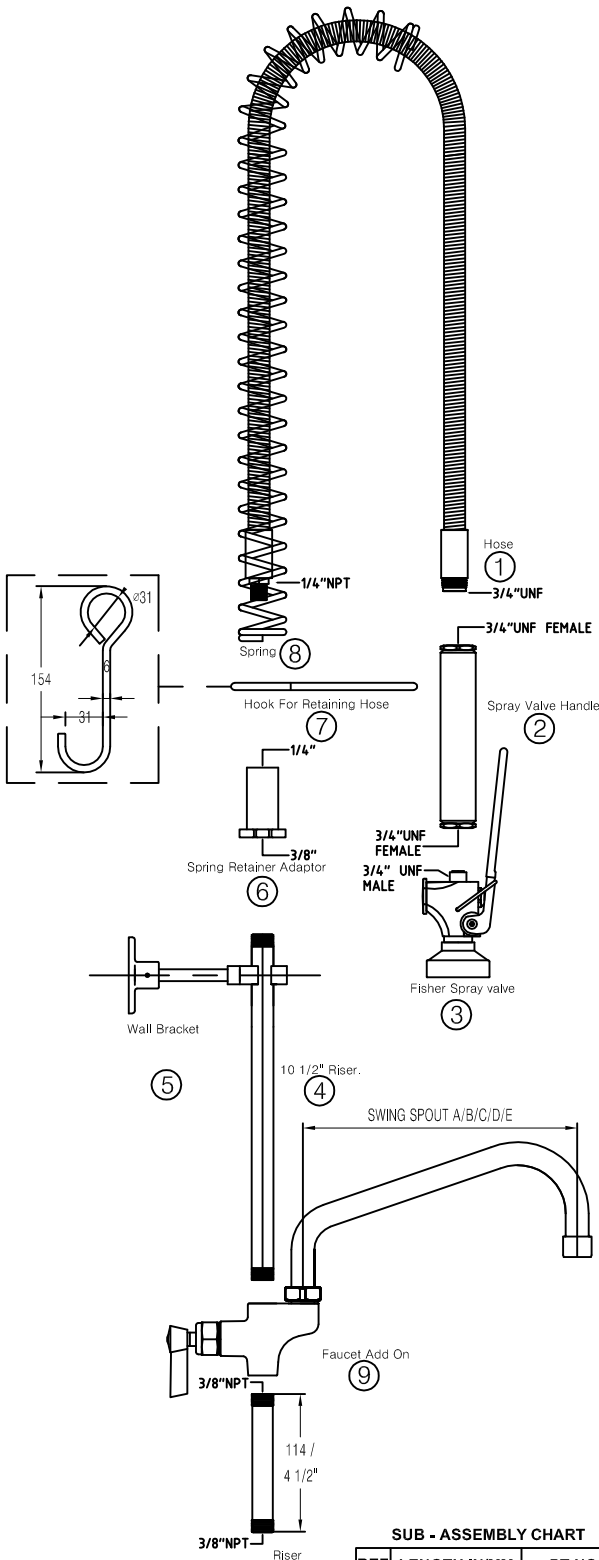

**SUB - ASSEMBLY CHART**

REF	LENGTH IN/MM	PT.NO.
A	6" /179mm	GF2506
B	8" /227mm	GF2508
C	10" /276mm	GF2510
D	12" /326mm	GF2512
E	14" /376mm	GF2514