




**PRODUCT NAME:**  
**GLOBAL AUTOFLO SERIES**  
**ELECTRONIC HANDS FREE TAP**

**PART NUMBER:**  
 AUO175

**DESCRIPTION:**  
 Autoflo Gooseneck Basin Hands Free tap.  
 with sensor range adjustment

**TECHNICAL INFORMATION:**  
 - IDEAL WORKING PRESSURE 65 - 100 PSI  
 - MAXIMUM PRESSURE = 200 PSI STATIC  
 (in short periods)  
 - WORKING TEMPERATURE 5 C - 65 C  
 - SHIPPING WEIGHT 2.0KGS (approx)  
 - SCREWED MECHANICAL JOINTS

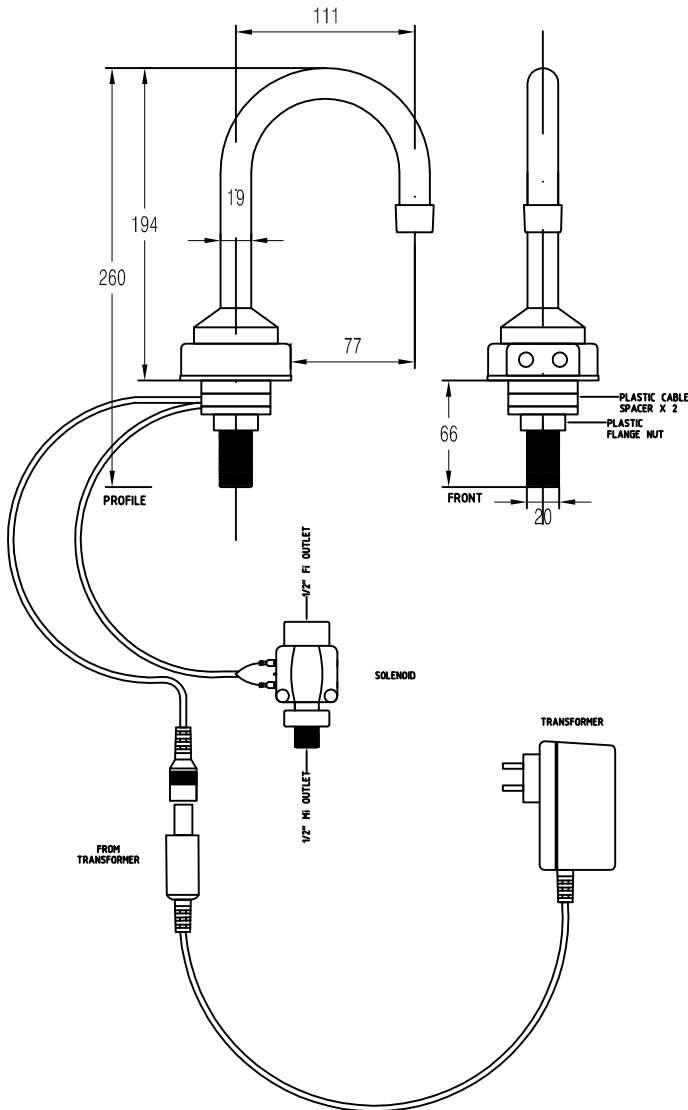

**SUPPLIED WITH:**

- C.P. Gooseneck Spout - with cable spacers & lock nut.
- Eyebody
- Solenoid
- Powerpack / Transformer

**FEATURES:**

- Chrome Plated Gooseneck Spout & Eyebody are separate identities, allowing easier & cost effective replacement of either parts.
- Gooseneck Spout is WELS rated to 4 stars.
- Gooseneck Spout has extra long 1/2" thread to go through thick benches.
- Gooseneck Spout is *Rigidly fixed in placed* by means of a machined flat side on the 1/2" All Thread that passes through similar shaped hole in Eyebody to lock spout into position.
- Eyebody uses latest Digital technologies = High reliability rate.
- Eyebody is factory set to activate under spout.
- Solenoid is fully 'Watermarked' and made from plastic = Silent on/off
- Solenoid has inline Plastic Basket strainer at inlet side.

**TECHNICAL INFORMATION:**

- The tap will test itself by turning on/off 3 times at start up.
- Solenoid is 24 v
- Powerpack / Transformer is 240 v / 24v

**WELS**

-4 STAR, 7.5 l/pm

**GLOBAL "AUTOFLO" PT No. AUO175**  
**BASIN MOUNT - GOOSENECK SPOUT**