




REF	SPOUT LENGTH IN/MM	PART NO.
A	6" /179mm	GF032506
B	8" /227mm	GF032508
C	10" /276mm	GF032510
D	12" /326mm (Stocked Line)	GF032512
E	14" /376mm	GF032514

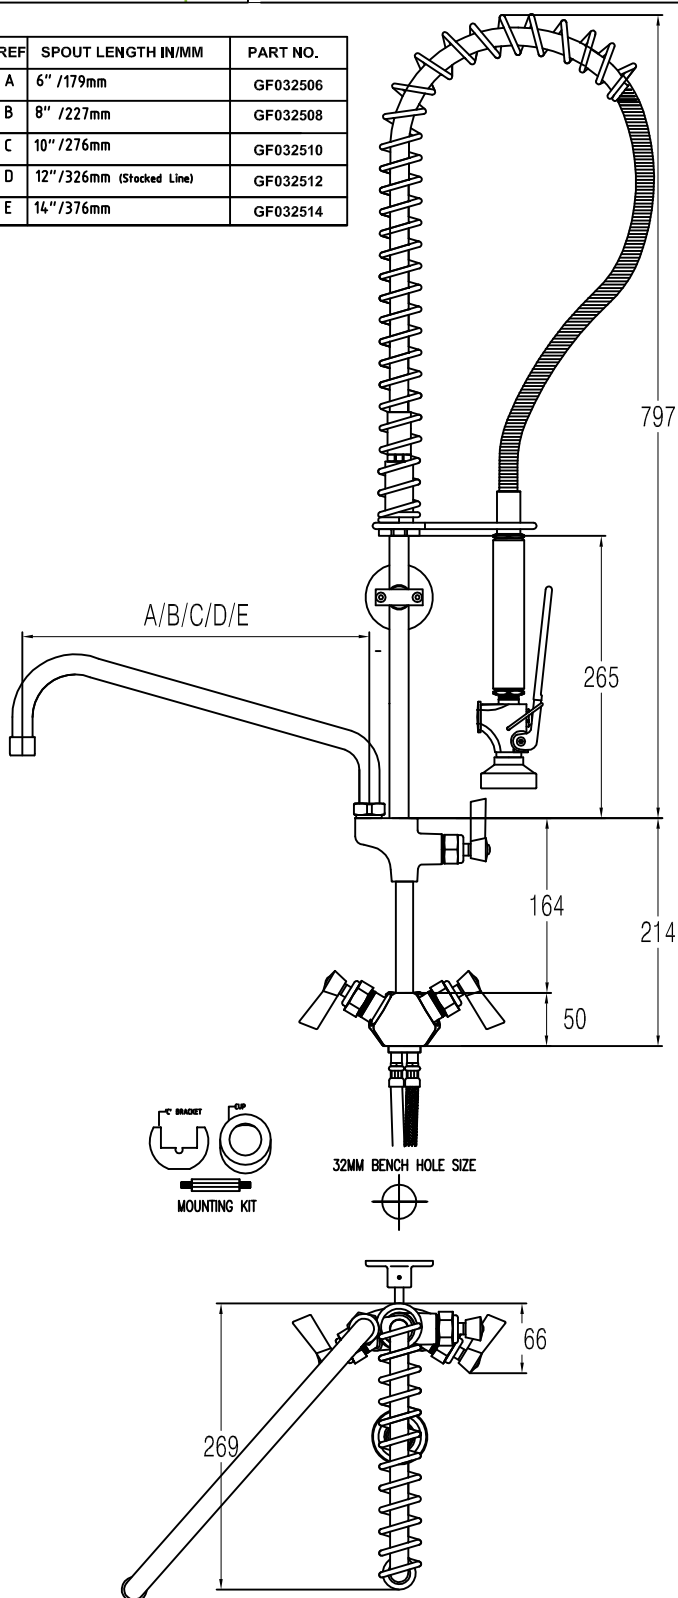

#### PRODUCT NAME:

'GLOBAL FISHER' Series  
PRE RINSE + 12" Add-On Spout  
DUAL HOB MOUNT TAP

#### PART NUMBER:

GF032506 + Other Sizes (See Chart to the Left)

#### DESCRIPTION:

"GLOBAL FISHER"  
PRE RINSE + ADD ON SPOUT MODEL  
S/S DUAL HOB / BENCH MOUNT TAP BODY with  
360 DEGREE SWIVEL CHECK STEMS  
JUMPER VALVES.

#### TECHNICAL INFORMATION:

- IDEAL WORKING PRESSURE 60 - 100 PSI
- Min. EFFECTIVE PRESSURE 45+ PSI
- MAX. PRESSURE = 200 PSI STATIC (in short periods)
- WORKING TEMPERATURE 5 C - 65 C
- SHIPPING WEIGHT 6.0KGS (approx)
- THREADED MECHANICAL JOINTS

#### SUPPLIED WITH:

- CP SPRAY GUN (3.5lpm / WELS 6 Star)
- S/S ARMOURFLEX HOSE -900mm
- CP SPRING GUARD & HOOK
- S/S 10 1/2" RISER ABOVE ADD-ON SPOUT
- CP WALL BRACKET
- CP ADD-ON SPOUT w/- CP 4 1/2" Riser. (See chart for spout lengths)
- S/S DUAL HOB TAP BODY
- S/S INLET HOSES- 500mm Long & MOUNTING KIT

#### FEATURES:

##### TAP BODY:

- S/S DUAL HOB BODY
- S/S INTERNAL WORKINGS
- C.P. LEVER HANDLES
- S/S BRAIDED INLET HOSE & FITTINGS (500mm Long -suit deep bowls)
- S/S 360 DEGREE SWIVEL SPRING CHECK STEMS JUMPER VALVES

##### ARMOURFLEX HOSE:

- 915MM LONG (36 INCHES)
- S/S ARMOURFLEX EXTERNAL JACKET w/- S/S END FITTINGS
- 3 PLY FIBRE REINFORCED INTERNAL RUBBER HOSE
- HIGH QUALITY, HARD WEARING AND ROBUST HOSE.

##### SPRAY VALVE & HANDLE:

- CHROME PLATED BRASS
- INSULATED BLACK HANDLE
- FLAT CHROME PLATED METAL SQUEEZE LEVER WITH INSULATION COVERING & FLAT WIDE STOPPER.
- SQUEEZE LEVER IS CONSTANT IN MAINTAINING OF IT'S POSITION.
- QUICK RELEASE ON/OFF CLIP ON SQUEEZE LEVER FOR SAFETY.
- 15 DEGREE FLAT HIGH PRESSURE SPRAY FOR BEST CLEANING.

##### ADD-ON SPOUT (a.k.a ADD-ON POT FILLER)

- ACTS AS A DIVERTER TAP ONLY WITH VARIOUS SPOUT LENGTHS
- CURRENT MODEL IS CHROME PLATED
- SCREWS INTO 4 1/2" CP RISER

##### WALL BRACKET:

- CHROME PLATED ROD ADJUSTS FROM 50mm - 300mm
- OPTIONAL S/S ALL THREAD - ADJUSTS 50mm - 150mm
- 3 SCREW HOLE BACK PLATE FOR EASY FIXING TO STUDS

##### SPRAY VALVE & HANDLE:

- CP BRASS VALVE w/- INSULATED HANDLE
- FLAT CP BRASS SQUEEZE LEVER w/- INSULATION COVERING.
- QUICK RELEASE ON /OFF CLIP - IDEAL FOR EASE OF USE & SAFETY

#### WELS

Spout = 3.5 STAR, 9lpm

Spray = 6 STAR, 3.5lpm

#### WATERMARK & WELS:

Global Tapware Pty Ltd is a Watermarked, level 1, Company.  
All relevant products & components are WELS registered.

#### Special Notice:

- 1 - We reserve the right to make changes to products and drawings without notice.
- 2 - All drawings & Documents are subject to copyright ©.
- 3 - Seek written consent by us to reprint / use for other than specification work.

'GLOBAL FISHER' Series PT NO.GF032506 +OTHER SIZES  
PRE RINSE + ADD-ON SPOUT - DUAL HOB TAP

