



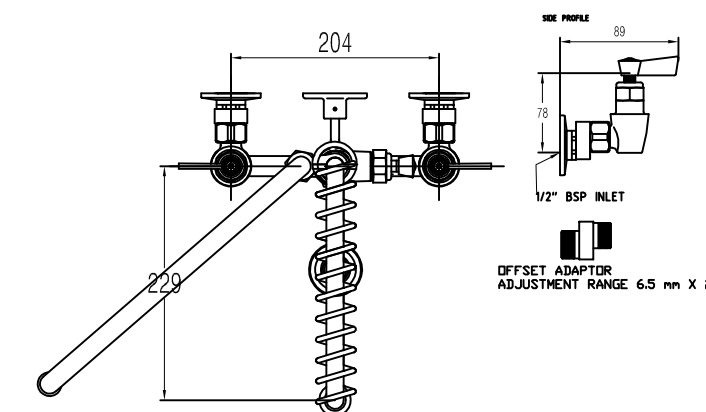

REF	SPOUT LENGTH IN/MM	PART NO.
A	6" /179mm	GF152506
B	8" /227mm	GF152508
C	10" /276mm	GF152510
D	12" /326mm	GF152512
E	14" /376mm	GF152514

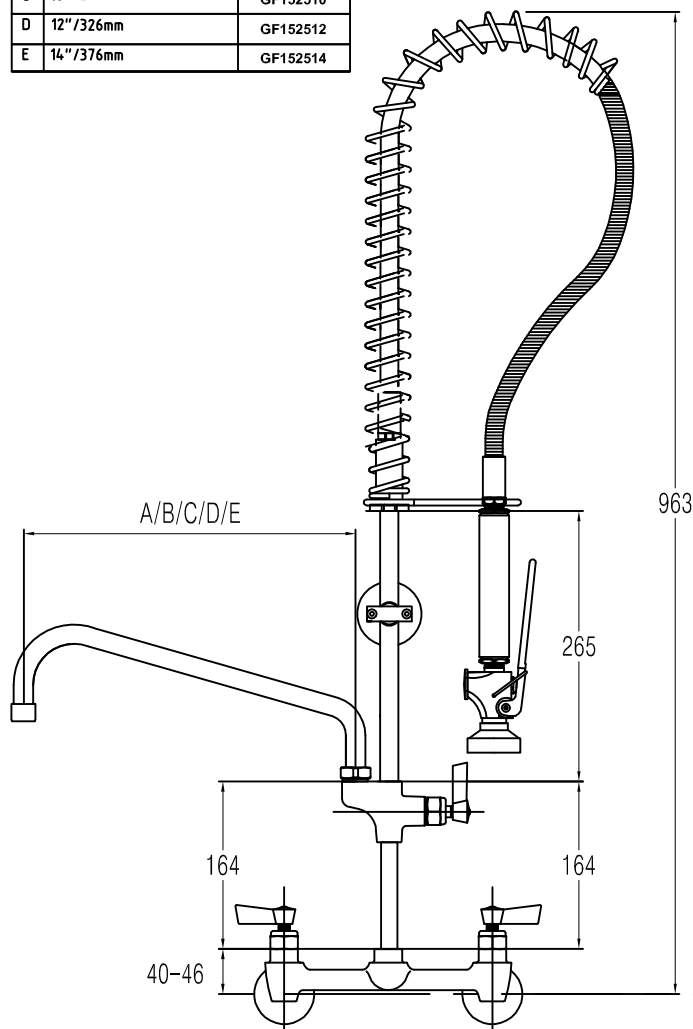

PRODUCT NAME:

'GLOBAL FISHER' Series
PRE RINSE + 12" Add-On SPOUT
EXPOSED WALL MOUNT TAP - ADJUSTABLE

PART NUMBER:

GF152506 + Other Sizes (see Chart to the Left)

DESCRIPTION:

"GLOBAL FISHER"
PRE RINSE + Add-On SPOUT MODEL
S/S EXPOSED ADJUSTABLE WALL TAP w/- 360
DEGREE SWIVEL CHECK STEMS JUMPER VALVES.

TECHNICAL INFORMATION:

- IDEAL WORKING PRESSURE 60 - 100 PSI
- Min. EFFECTIVE PRESSURE 45+ PSI
- MAX. PRESSURE = 200 PSI STATIC (in short periods)
- WORKING TEMPERATURE 5 C - 65 C
- SHIPPING WEIGHT 6KGS (approx)
- THREADED MECHANICAL JOINTS

SUPPLIED WITH:

- CP SPRAY GUN (3.5lpm / WELS 6 Star)
- S/S ARMOURFLEX HOSE -900mm
- CP SPRING GUARD & HOOK
- S/S 10 1/2" RISER ABOVE POT FILLER
- CP WALL BRACKET
- CP ADD ON POT FILLER w/- CP 41/2" Riser (See chart for spout lengths)
- S/S EXPOSED ADJUSTABLE WALL TAP BODY

FEATURES:

TAP BODY:

- S/S EXPOSED ADJUST WALL BODY with S/S OFFSET FITTINGS
- S/S INTERNAL WORKINGS
- S/S 360 DEGREE SWIVEL SPRING CHECK STEMS JUMPER VALVES
- C.P. LEVER HANDLES

ARMOURFLEX HOSE:

- 915MM LONG (36 INCHES)
- S/S ARMOURFLEX EXTERNAL JACKET w/- S/S END FITTINGS
- 3 PLY FIBRE REINFORCED INTERNAL RUBBER HOSE
- HIGH QUALITY, HARD WEARING AND ROBUST HOSE.

SPRAY VALVE & HANDLE:

- CHROME PLATED BRASS with INSULATED BLACK HANDLE
- FLAT CHROME PLATED METAL SQUEEZE LEVER WITH INSULATION COVERING & FLAT WIDE STOPPER.
- SQUEEZE LEVER IS CONSTANT IN MAINTAINING OF IT'S POSITION.
- QUICK RELEASE ON/OFF CLIP ON SQUEEZE LEVER FOR SAFETY.
- 15 DEGREE FLAT HIGH PRESSURE SPRAY FOR BEST CLEANING.

ADDITIONAL SPRAY VALVE INFO

- LOW ENERGY CONSUMPTION = **HIGH \$ SAVINGS**
- LOW WATER CONSUMPTION = **HIGH \$ SAVINGS**
- ENGINEERED TO OUT PERFORM MOST OTHER BRANDS
- EXTREMELY ROBUST - ENGINEERED TO LAST
- INTERCHANGEABLE WITH MOST SIMILAR BRANDS AT HANDLE
(fits into 3/4"unf female handle)

WALL BRACKET:

- CHROME PLATED ROD ADJUSTS FROM 50mm - 300mm
- OPTIONAL S/S ALL THREAD - ADJUSTS 50mm - 150mm
- 3 SCREW HOLE BACK PLATE FOR EASY FIXING TO STUDS

WELS

SPOUT = 3.5 STAR, 9lpm

SPRAY = 6 STAR, 3.5lpm

WATERMARK & WELS:

Global Tapware Pty Ltd is a Watermarked, level 1, Company.
All relevant products & components are WELS registered.

Special Notice:

- 1 - We reserve the right to make changes to products and drawings without notice.
- 2 - All drawings & Documents are subject to copyright ©.
- 3 - Seek written consent by us to reprint / use for other than specification work.

'GLOBAL FISHER' Series PT NO. GF152506 + Other Sizes
PRE RINSE + ADD ON SPOUT- EXPOSED ADJUST WALL TAP

