

'Global Fisher™' S/S Standard Pre-Rinse

'TALL' 900mm (unhooked) – 950mm (hooked)

SINGLE – TALL Pre-RINSE w- POT FILLER – WALL MOUNT

Available Now

The **KNUCKLE**. Allows Adjustable Wall Bracket Mounting System. Sold separately.



New S/S improved, Watermarked PR Hose, w- 1/2" FI Ends

New Pot Filler

NOW Made with 'Drop 'N Lock' system

New Stainless Spray Gun w- Interchangeable Spray Tips

Product Code :- **GF112512** *1 *2
RRP \$ _____ + GST



***1 How To change product codes for other size Spouts**
– change last 2 digits, e.g. :- 06 = 6", 08 = 8", 10 = 10"
[Note – These come under other WELS Reg. No.s]

***2 More Products under the GF032512 Code :-**

- GF112512-M (Midi model - short 750)
- GF112512-C (Café model - short 650)
- GF2512-A (Adjustable Height)
- GF112512-SS (Made for RO Applications)

Features:

- All Component made from quality polished 304 S/S.
- Squeeze Lever has Lock-On & Quick release shut off - (OH&S Feature)
- Hot & Cold Lever Handles.
- "Drop N Lock" easy Installation System.
- Pre-assembled & tested Sub-Assembly in our Brisbane factory.
- Triple Interchangeable Spray Tips- Flat Fan, Shower, Pulse.

WARRANTY:

- 36 Months for Commercial use

Technical:-

Australian Standards : **Watermarked Lic. 23008**

WELS Reg. No. T14468

1st Outlet Spray Gun :

WELS Rated : **6 Stars**

Flow Rate : **3.5 lpm**

2nd Outlet Spout :

WELS Rated : **3 Stars**

Flow Rate : **9 lpm**

Mounting Hole : **32 -35mm**

Material : **304 S/S**

Finish 1 : **Polished S/S**

Working Press. : **500kpa. (NPC)**

Max. Press. rate : **1500kpa.**

Operating Temp : **1 - 80^o C.**


Global Tapware Pty Ltd

E – sales.info@globaltapware.com

P – 07 38 55 2350

P – 1300 85 25 15

W- **GLOBALTAPWARE.COM.AU**

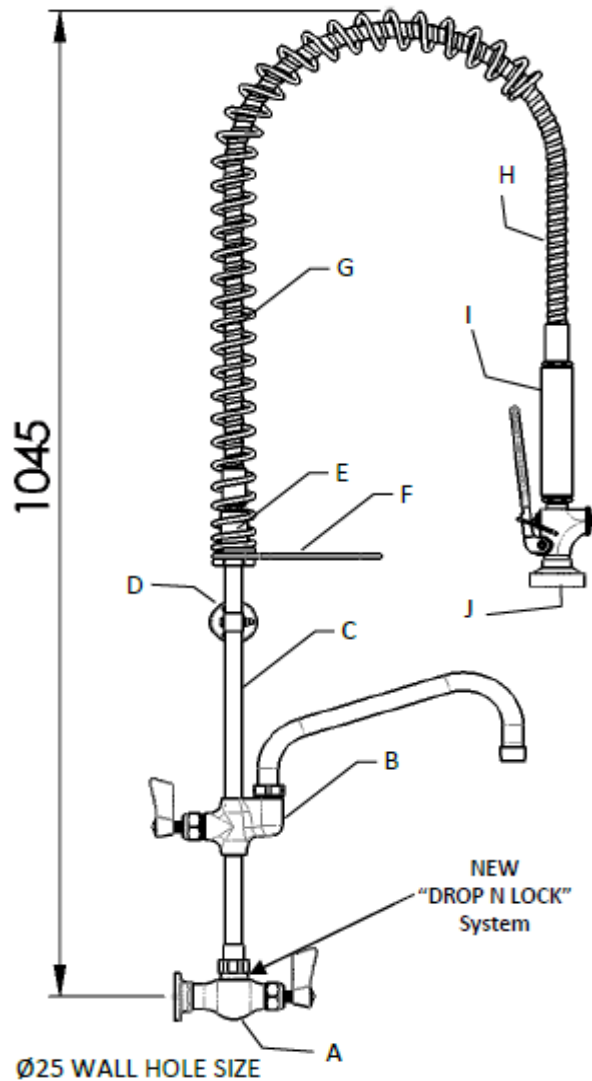


SUPPLIED WITH: Standard Model

- A - S/S SINGLE WALL TAP c/w 1/2" Mounting kit
- B - C.P. ADD ON POT FILLER + 4 1/2" RISER w/- CP 12" Spout
WELS 3 STAR – 9lpm. (See chart for more spout lengths).
- C - S/S 10 1/2" RISER
- D - S/S WALL BRACKET
- E/F - S/S SPRING RETAINER + S/S HOOK (C.P.)
- G - CP SPRING GUARD
- H - S/S ARMOURFLEX HOSE 900 mm LONG
- I/J - C.P. SPRAY GUN & Handle (WELS 6 Star - 3.5lpm)

Other Spouts Available as Spare Parts.
All are WELS Registered No. T40512,
3 Star @ 9 lpm

REF	LENGTH Inch / mm	Height to Aerator	PT.NO. (all S/S)
A	6"/179mm	6mm	G3006S
B	8"/227mm	36mm	G3008S
C	10"/276mm	41mm	G3008S
D	12"/326mm	56mm	G3012S
E	14"/376mm	56mm	G3014S

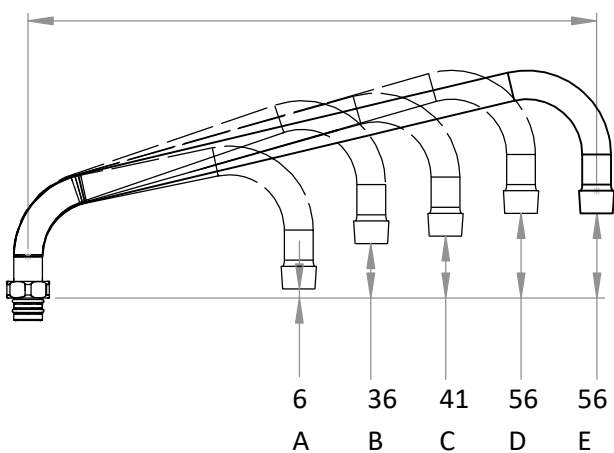

SPRAY GUN INTERCHANGABLE SPRAY TIPS


**Spray Tip
Supplied Fitted**

FLAT FAN



**Other Spray Tips
supplied**

SHOWER



PULSE

