

"GLOBAL FISHER" – 'R.O. RANGE' - Pre-Rinse - HOB Made in Australia

By Global Tapware Pty Ltd

www.globaltapware.com.au

1300 85 25 15

These fully Stainless-Steel Pre-Rinses are designed for applications that require a range of spray tips to carry out various functions for R.O. Applications. Something that is **gentle** but also **tough** and **robust**.

These units are very suitable for the CSSD & the more demanding Commercial Kitchen Environments. They are made from 304 Stainless steel and are fully Watermarked and 6 Star WELS rated for Spray Gun & 3 Star for the Aerator Spouts.

The Inner Tube of the Pre-Rinse Hose is supplied with either Santoprene or EPDM (depending on availability at time of manufacture. With Taps rubber seats made from NBR rubber. All comply to AS4020 & suitable for RO water.

Technical Information: -

Safe Constant Working Temperature range is: **4 – 65d C / occasional peaks up to 85d C**


Safe Operational Working Pressure range is up to: **500kpa / Max. 1379 kpa**

Pt. No. -GF032100-SS

32mm Bench Hole



Supplied with Wall Bracket "KNUCKLE"

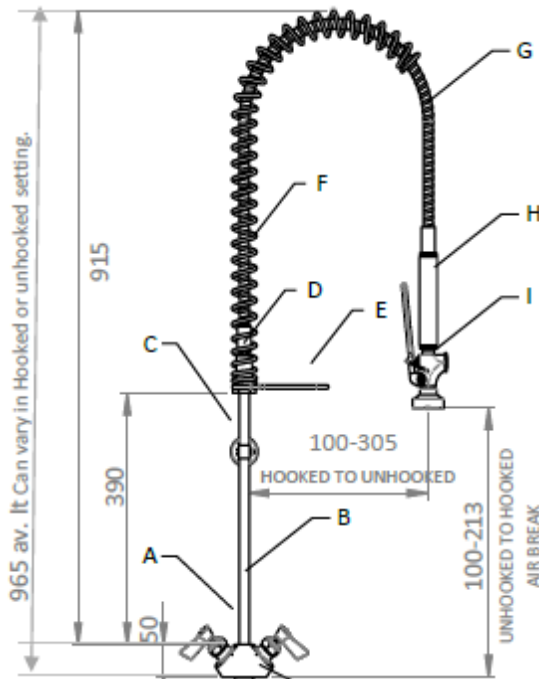

Wmk Lic. 0308
WELS Reg. T14467
WELS Star:- 6 Stars
WELS LPM:- 4.5 lpm



Pt. No. - (A) GF032506-SS (B) GF032508-SS (C) GF032510-SS (D) GF032512-SS (E) GF032514-SS


32mm Bench Hole




Supplied with Wall Bracket "KNUCKLE"



Wmk Lic. 0308
WELS Reg. T14467
WELS Star:- 6 Stars
1- WELS LPM:- 4.5 lpm
2- WELS LPM:- 9 lpm

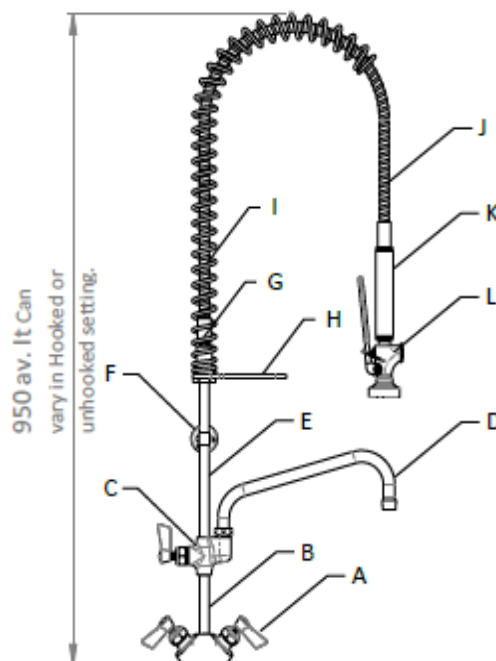

| STANDARD SPOUTS Dimensions | | |
|----------------------------|--------------|-------------------|
| REF | LENGTH IN/mm | Height to Aerator |
| A | 6"/153mm | 6mm |
| B | 8"/203mm | 36mm |
| C | 10"/254mm | 41mm |
| D | 12"/300mm | 56mm |
| E | 14"/356mm | 56mm |

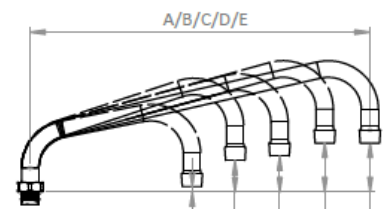

New Style S/S Pot Filler




We reserve the right to change, modify, alter products & drawings as when required without notice.

Spray Gun Options

(incl.s Speaial Low Aerosol Spray Tip for RO Applications)

Interchangeable Triple Heads - Spray Patterns

Stdd -15d 'Flat Fan' / 'Shower Spray' / Straight Stream / Soft Wide 'Shower Spray'



**Comes already Fitted
w- RO Shower Tip.**



Low Aerosol Spread.



Tool in action



Repair Kit available
Pt. No. G50KIT

S/S "KNUCKLE" :

These RO Units come with this special part so that the wall bracket can be fitted to the 45degree splashback or any other angle / Position.

There are 3 x M5 S/S Grub Screws on each end to hold the rod securely.

Part is also sold separately.

"KNUCKLE"



=



GLOBAL TAPWARE PTY LTD

P O Box 5737, Stafford Height Qld. 4053

P 07 3855 2350 P 1300 85 25 15

E sales.info@globaltapware.com

W globaltapware.com.au