

'Global Fisher™' S/S Standard Pre-Rinse

'TALL' 1000mm (unhooked) – 1050mm (hooked)

Pre-RINSE w- POT FILLER Exposed Wall Breach



Available Now

The **KNUCKLE**. Allows Adjustable Wall Bracket Mounting System. Sold separately.



New S/S improved, Watermarked PR Hose, w- 1/2" FI Ends

New Stainless Spray Gun w- Interchangeable Spray Tips

NOW Made with 'Drop 'N Lock' system

New Pot Filler

Product Code :- **GF152512** *1 *2
RRP \$ _____ + GST

***1 How To change product codes for other size Spouts**
– change last 2 digits, e.g. :- 06 = 6", 08 = 8", 10 = 10"
[Note – These come under other WELS Reg. No.s]

***2 More Products under the GF032512 Code :-**

- GF152512-M (Midi model - short 750)
- GF152512-C (Café model - short 650)
- GF152512-A (Adjustable Height)
- GF152512-SS (Made for RO Applications)

Features:

- All Component made from quality polished 304 S/S.
- Squeeze Lever has Lock-On & Quick release shut off - (OH&S Feature)
- Hot & Cold Lever Handles.
- "Drop N Lock" easy Installation System.
- Pre-assembled & tested Sub-Assembly in our Brisbane factory.
- Triple Interchangeable Spray Tips- Flat Fan, Shower, Pulse.
- Good Flex & Reach.

WARRANTY:

- 36 Months for Commercial use

Technical:-

Australian Standards : **Watermarked**

Lic. 23008

WELS Reg. No.

T14484

1st Outlet

Spray Gun :

WELS Rated

: **6 Stars**

Flow Rate

: **3.5 lpm**

2nd Outlet

Spout :

WELS Rated

: **3 Stars**

Flow Rate

: **9 lpm**

Mounting Hole

: **32 -35mm**

Material

: **304 S/S**

Finish 1

: **Polished S/S**

Working Press.

: **500kpa. (NPC)**

Max. Press. rate

: **1500kpa.**

Operating Temp

: **1 - 80° C.**


Global Tapware Pty Ltd

E – sales.info@globaltapware.com

P – 07 38 55 2350


P – 1300 85 25 15

W- **GLOBALTAPWARE.COM.AU**

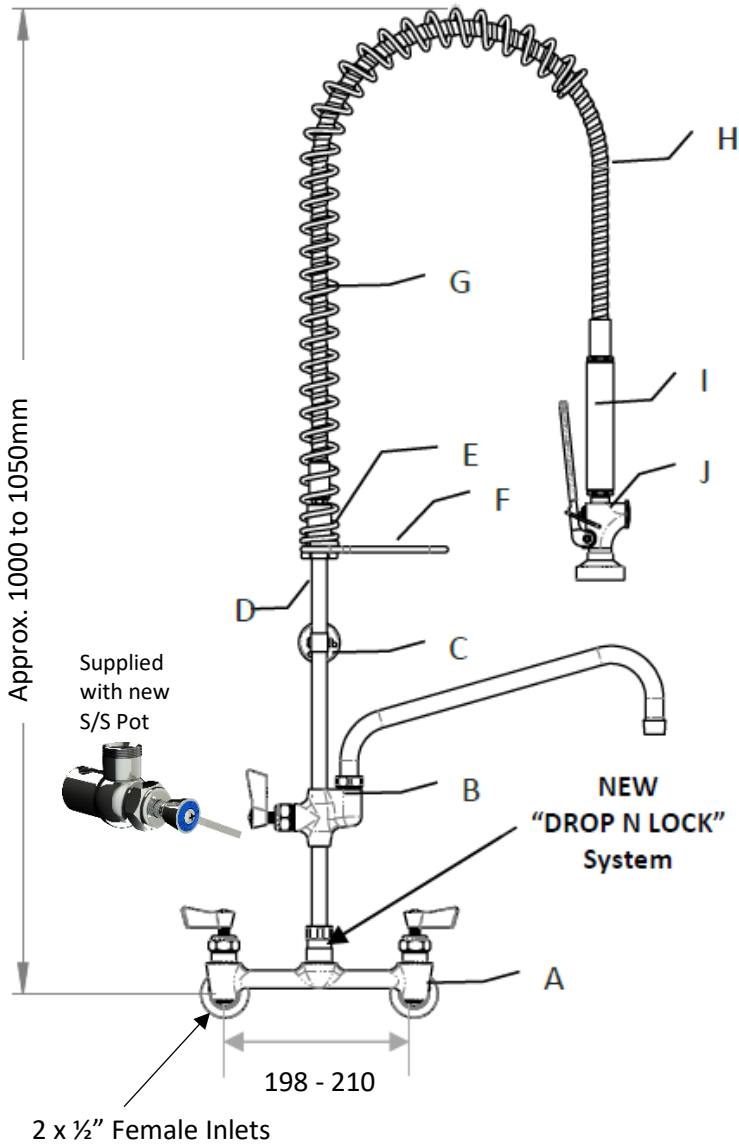

All SPOUTS are WELS Registered and listed under D* - WELS Reg. T40512, 3 Star @ 9 lpm - Other Spouts Available as Spare Parts or see *1, p.1.

REF	LENGTH Inch / mm	Height to Aerator	PT.NO. (all S/S)
A	6"/179mm	6mm	G3006S
B	8"/227mm	36mm	G3008S
C	10"/276mm	41mm	G3008S
D*	12"/326mm	56mm	G3012S
E	14"/376mm	56mm	G3014S

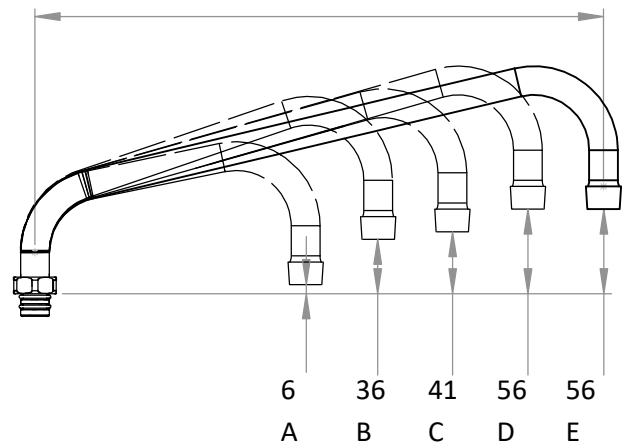

SPRAY GUN INTERCHANGABLE SPRAY TIPS

SUPPLIED WITH:	
A	S/S Exposed Adjustable Breach Wall Tap
B	S/S Add-On Pot Filler w- spout length of you choice
C	S/S Wall Bracket, w- 2 Rods & optional 'KNUCKLE'
D	S/S Risers - 10 1/2" on top, 4 1/2" on Bottom.
E	S/S Spring Retainer.
F	S/S & Chrome Plated 8" Hose/ Gun Hook
G	S/S & Chrome Plated Spring Guard - Tall
H	S/S Armourflex Outer Hose & Fittings over Braid hose
I	S/S & Plastic Gun Handle
J	S/S Spray Gun, w- Interchangeable Tips →


Spray Tip Fitted

Other Spray Tips supplied.

FLAT FAN



SHOWER



PULSE



All Products Must be installed in accordance with the requirements of AS/NZS3500