

GLOBAL *FISHER* PRE-RINSES

- HOB MOUNT -

POT FILLER

SPOUT MODELS

BROCHURE BOOK models:

GF02, GF03, GF04, GF05, GF06, GF07

QR Code
insert



INDEX

GLOBAL FISHER brand

Technical Drawings for: **HOB Pre-Rinses POT FILLER SPOUT**

PAGE		PRODUCT CODE
		Single HOB Tap
4 - 5		GF022512 Tall
4 - 5		GF022512-A Adjustable
4 - 5		GF022512-M Midi
4 - 5		GF022512-C Short / Café
6 - 7		GF022512-SS RO Water & FOOD Prep
8 - 9		GF022512-TMV Thermostatic Mixing Valve
		DUAL HOB Tap
10 - 11		GF032512 Tall
10 - 11		GF032512-A Adjustable
10 - 11		GF032512-M Midi
10 - 11		GF032512-C Short / Café
12 - 13		GF032512-SS RO Water & FOOD Prep
		FIXED Exposed Breach HOB Tap
14 - 15		GF042512 Tall
14 - 15		GF042512-A Adjustable
14 - 15		GF042512-M Midi
14 - 15		GF042512-C Short / Café
		Adjustable Exposed Breach HOB Tap
16 - 17		GF052512AB Tall
16 - 17		GF052512AB-A Adjustable
16 - 17		GF052512AB-M Midi
16 - 17		GF052512AB-C Short / Café
		HOB Outlet Only (No HOB tap)
18 - 19		GF062512 Tall
18 - 19		GF062512-A Adjustable
18 - 19		GF062512-M Midi
18 - 19		GF062512-C Short / Café
		Adjustable Hidden Breach HOB Tap
20 - 21		GF072512 Tall
20 - 21		GF072512-A Adjustable
20 - 21		GF072512-M Midi
20 - 21		GF072512-C Short / Café
22 - 23	Blank	

Supplied with 12" / 300mm S/S Spout.
Other Spout Lengths available - see chart

NEW Height Adjustable Pre-Rinse for when shelves get in the way

SPRAY GUN INTERCHANGABLE SPRAY TIPS

- Flat Fan / Chisel. (FITTED)
- Centre Shower
- RO Water TIP - Low Atomized Shower

WARRANTY:
36 months from Install date.

WaterMark
AS3718
Certificate No. 23008
Global Tapware Pty Ltd

WATER RATING
The water used to flush the toilet is 4.5 litres per minute (spray tap)
4.5 litres per minute (spray tap)
Licence No. 0308
Global Tapware

Tall
Adjustable
Midi
Cafe

TALL - Adjustable
Pt. No. GF022512-A

MIDI
Pt. No. GF022512-M

Café / Short
Pt. No. GF022512-C

1. DROP N LOCK = fast assembly

2. Adjustable Wall Bracket.

3. Repair Kits AVAILABLE

4. S/S Super Tuff Armour-flex w- ½" fi Swivel ends

5. Australia's first Water Saving Spray Gun & still the MOST Reliable on Market.


6. Adjustable Spring Retainer. The First in the World. Designed & Made in Australia by GT.

SINGLE HOB Tap Feed: – HOT, COLD or MIXED


Products must be installed by registered Plumber in accordance with the PCA and AS/NZS3500.

SPOUT CHART - Tall Model (applies to the other models w- suffix)		
PART No.	MODEL	Length
GF022506	6"	150mm
GF022508	8"	200mm
GF022510	10"	250mm
GF022512	12"	300mm
GF022514	14"	350mm
GF022516	16"	400mm


TALL

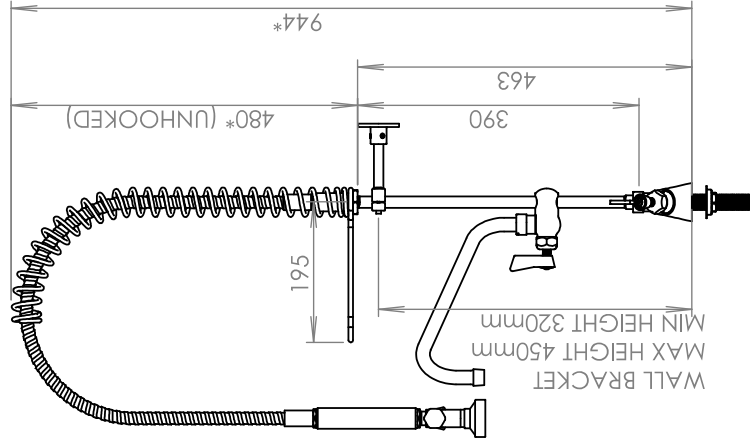


TALL - Adjustable

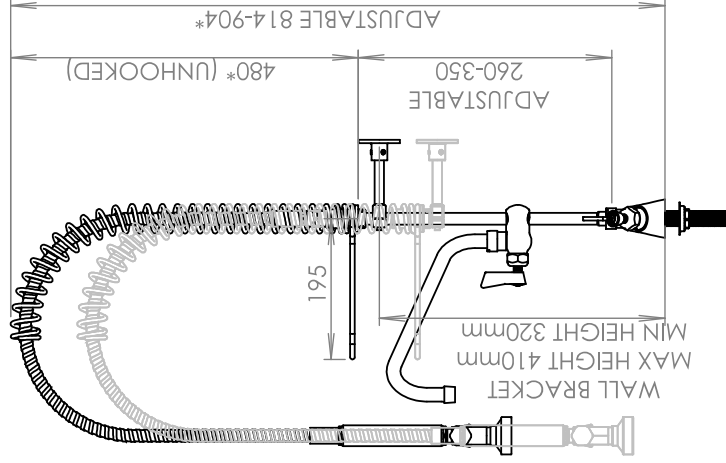


MIDI

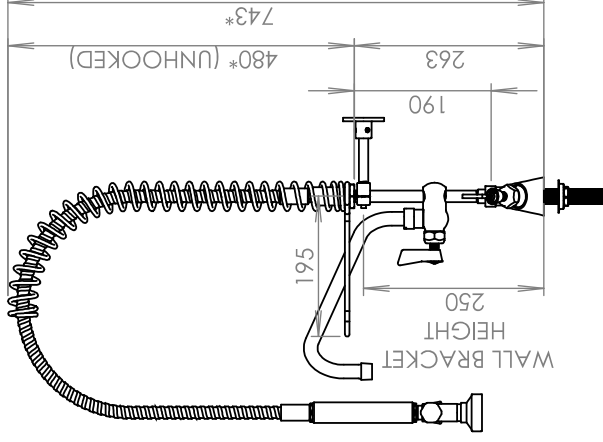


Café / SHORT

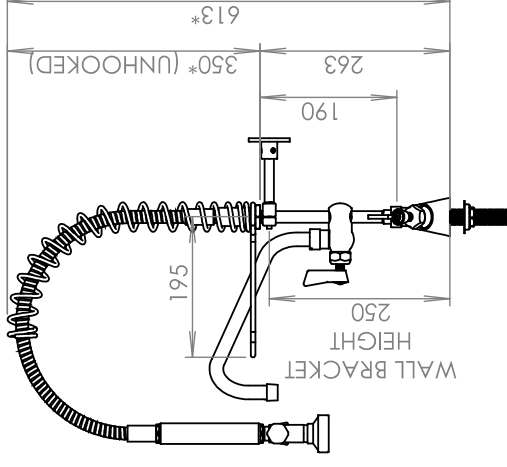


ISOMETRIC View

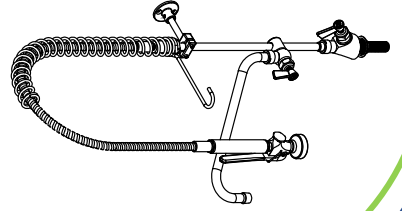

TOP View

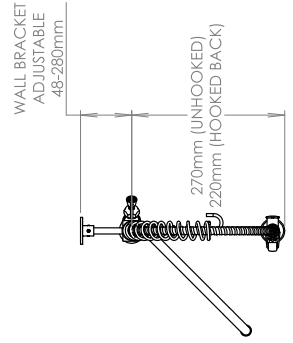


FRONT View

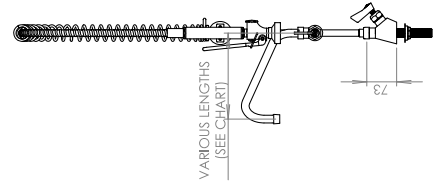

"KNUCKLE" - Sold separately. Pt. no. G83KL

Supplied with all 'RO' Units only. The "Knuckle" allows for variable angles of secure fastening of the pre-rinses to wall.

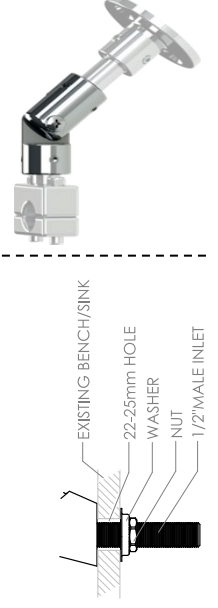

Technical: -

Aust. Standards.
"Lead Free"

: Watermarked
Lic. 23008

WELS Reg. No.

: TM41493

1sts Outlet – SPRAY GUN

WELS Rated

: 6 Stars

: 4.5 lpm

: 9 lpm

2nd Outlet - SPOUT

Mounting Hole

All Metal Material

Working Press.

Max. Press. Rate

Operating Temp.

: 25mm

: Polished 304 S/S

: 500kpa. (NPC)

: 1500kpa.

: 1 - 80° C.

Pt. No. - **GF022512-SS**

The '**KNUCKLE**' Allows Adjustable Wall Bracketing. Supplied w- RO PR taps for height adjustable sinks.



Key Features

- **Premium Material:** Constructed from polished 304 stainless steel (S/S).
- **Inner Tube of Pre-Rinse Hose:** Santoprene rubber with S/S Braid cover and another Protective outer S/S Spiral Sheath.
- **Watermarked PR HOSE:** Separately Tested & passed to AS4020 & AS3499.
- **Safety & Convenience:** Squeeze lever with lock-on and quick-release shut-off (OH&S feature).
- **Riser Sub-Assembly:** Made & tested in our Brisbane Factory.
- **Wall Bracket:** Was Designed & Made Specifically for Height Adjustable Sink Tables in mind.
- **Soft Spray Tip:** From End-User feed-back we Redesigned & made this current **Soft Spray Tip** specifically for minimizing the **Atomization of over spray** to the lowest amount possible.
- **Food Prep:** This Spray Tip can also be used in Food preparation areas to avoid bruising.
- **Interchangeable tips:** Other types of tips are available – see back page.

Warranty

- **Commercial Use:** 36 months

Technical: -

Australian Standards

: **Watermarked**

Lead free

Lic. 23008

WELS Reg. No.

:TM41431

1sts Outlet

Spray Gun – Flat Fan Tip

WELS Rated

: **6 Stars**

Flow Rate

: **4.5 lpm**

2nd Outlet

: **Spout**

WELS Rated

: **3 Stars**

Flow Rate

: **9 lpm**

Tap Mounting Hole.

: **25mm**

Material

: **304 S/S**

Finish

: **Polished S/S**

Working Press.

: **500kpa. (NPC)**

Max. Press. rate

: **1500kpa.**

Tap Operating Temp

: **1 - 80° C.**

Global Tapware Pty Ltd



E – info.tech@globaltapware.com

P – 07 38 55 2350

P – 1300 85 25 15

W- GLOBALTAPWARE.COM.AU

Product must be installed by registered Plumber in accordance with the PCA and AS/NZS3500.

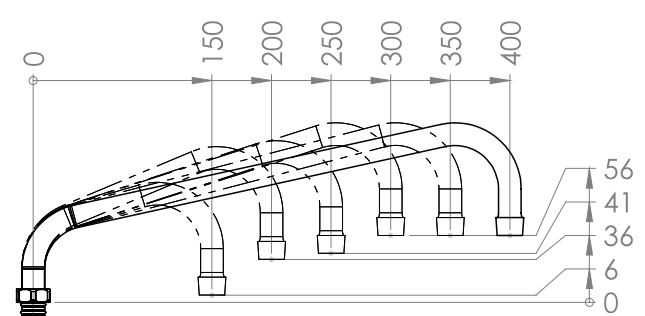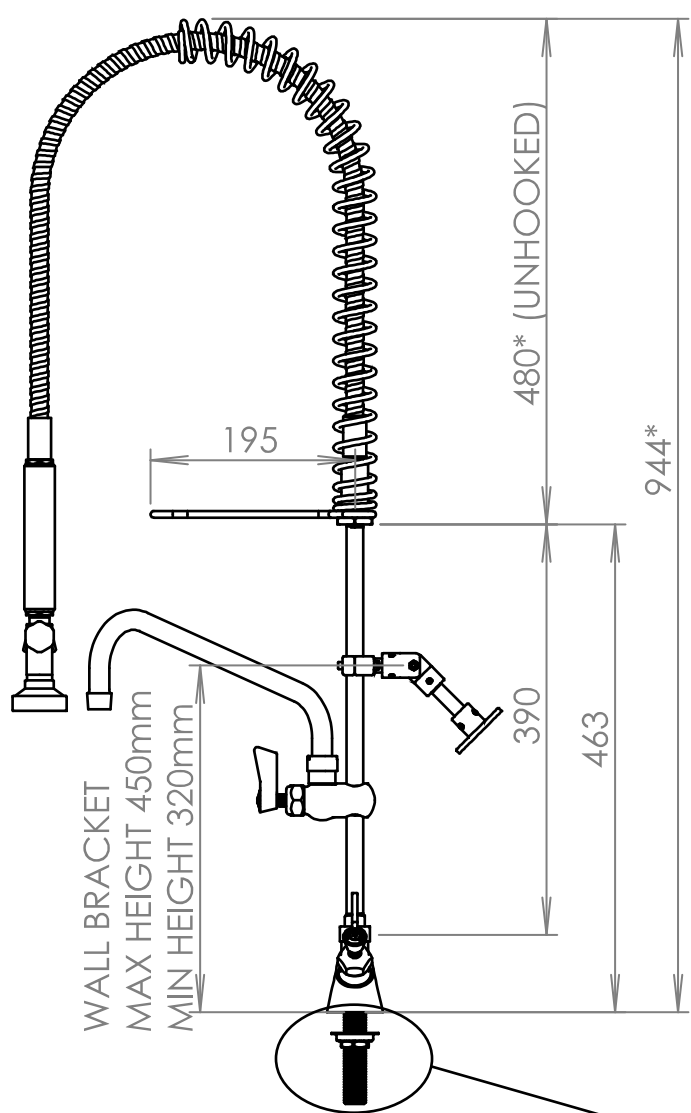


REF	LENGTH IN/MM	PART NO.
A	6" /179mm	GS3006
B	8" /227mm	GS3008
C	10" /276mm	GS3010
D	12" /326mm	GS3012
E	14" /376mm	GS3014

SPRAY GUN INTERCHANGABLE SPRAY TIPS

**Other Spray Tip
Supplied**
FLAT FAN



**Other Spray Tip
Supplied**
SHOWER

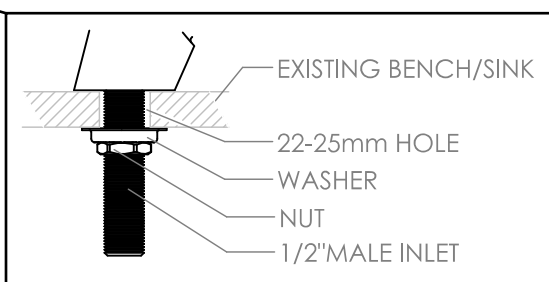

'Global Fisher™'

Single Hob Pre-Rinses w- Pot Filler

W- Thermostatic Tempering Valve

Pt. No. - **GF022512-TMV**

Available Now
The KNUCKLE. Allows
Adjustable Wall Bracket
Mounting System. Sold
separately. **Pt. No. G83KL**



Key Features:

- **Premium Material:** Constructed from polished 304 stainless steel (S/S).
- **Inner Tube of Pre-Rinse Hose:** Santoprene rubber with S/S Braid cover and another S/S Spiral Sheath Protective outer.
- **Watermarked PR HOSE:** Separately Tested & passed to AS4020 & AS3499.
- **Safety & Convenience:** Squeeze lever with lock-on and quick-release shut-off (OH&S feature).
- **Riser Sub-Assembly:** Made & tested in our Brisbane Factory.
- **Interchangeable tips:** Other types of tips are available – see back page.
- A separate branded TMV is supplied with this unit – packed inside box.

WARRANTY:

- 36 Months for Commercial use

Technical: -

Australian Standards : **Watermarked**
Lead Free **Lic. 23008**

WELS Reg. No. **TM41431**

1sts Outlet : **Spray Gun**

WELS Rated : **6 Stars**

Flow Rate : **4.5 lpm**

2nd Outlet : **Spout**

WELS Rated : **3 Stars**

Flow Rate : **9 lpm**

Tap Mounting Hole : **25mm**

Material : **304 S/S**

Tap Finish : **Polished S/S**

TMV Finish : **CP Brass**

Working Press. : **500kpa. (NPC)**

Max. Press. rate : **1500kpa.**

Tap Operating Temp : **1 - 65° C.**

TMV Op. Temp. : **Set by Plumber**

Global Tapware Pty Ltd



E – info.tech@globaltapware.com

P – 07 38 55 2350

P – 1300 85 25 15

W- GLOBALTAPWARE.COM.AU

Product must be installed by registered Plumber in accordance with the PCA and AS/NZS3500.

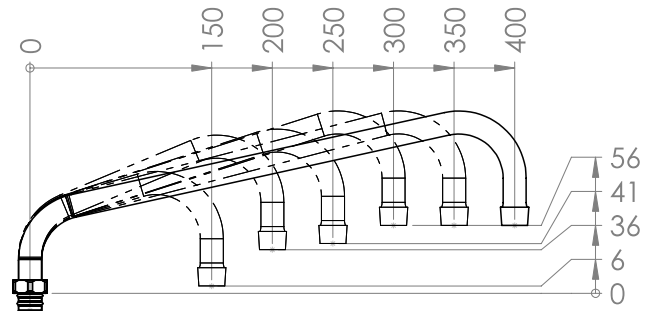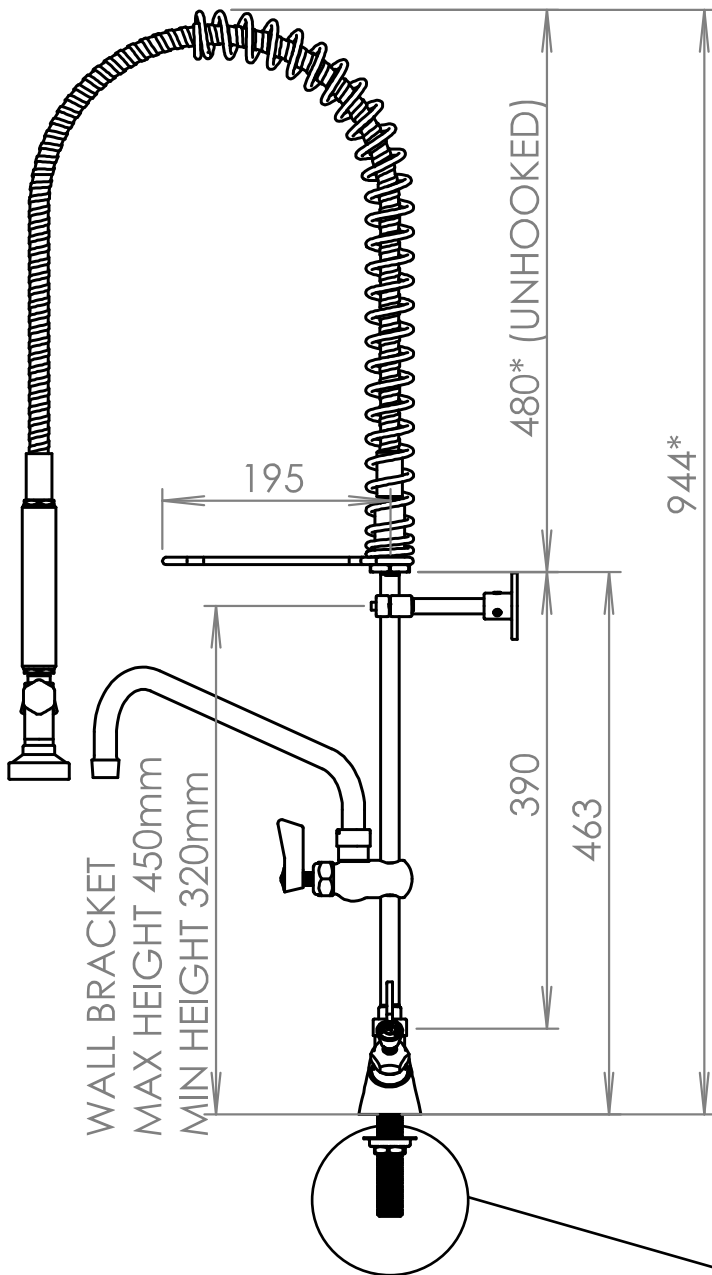

REF	LENGTH IN/MM	PART NO.
A	6" /179mm	GS3006
B	8" /227mm	GS3008
C	10" /276mm	GS3010
D	12" /326mm	GS3012
E	14" /376mm	GS3014

SPRAY GUN INTERCHANGABLE SPRAY TIPS



**Spray Tip
Supplied Fitted**

FLAT FAN



**Other Spray Tips
Supplied**

SHOWER

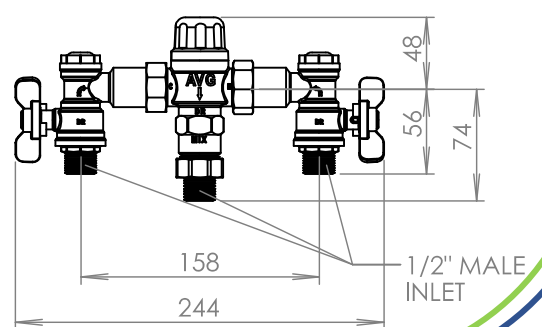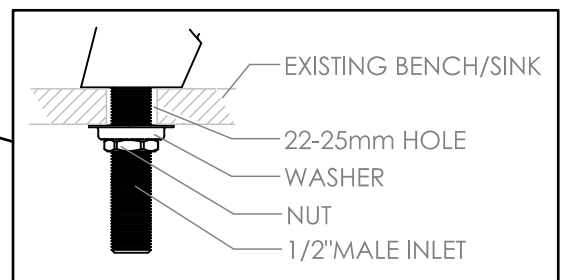


TMV DIMENSIONS

*RO Units - See Separate Brochure

Tall
Adjustable
Midi
Cafe

Supplied with 12" / 300mm S/S Spout.
Other Spout Lengths available – see Chart

SPRAY GUN INTERCHANGABLE SPRAY TIPS

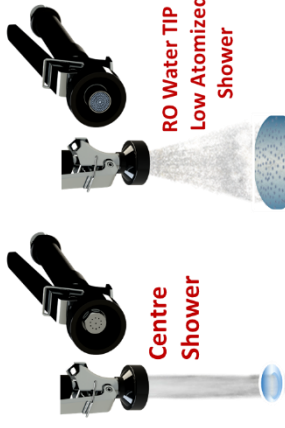


Cafe

Midi

NEW Height Adjustable Pre-Rinse for when shelves get in the way



WARRANTY:
36 months from Install date.

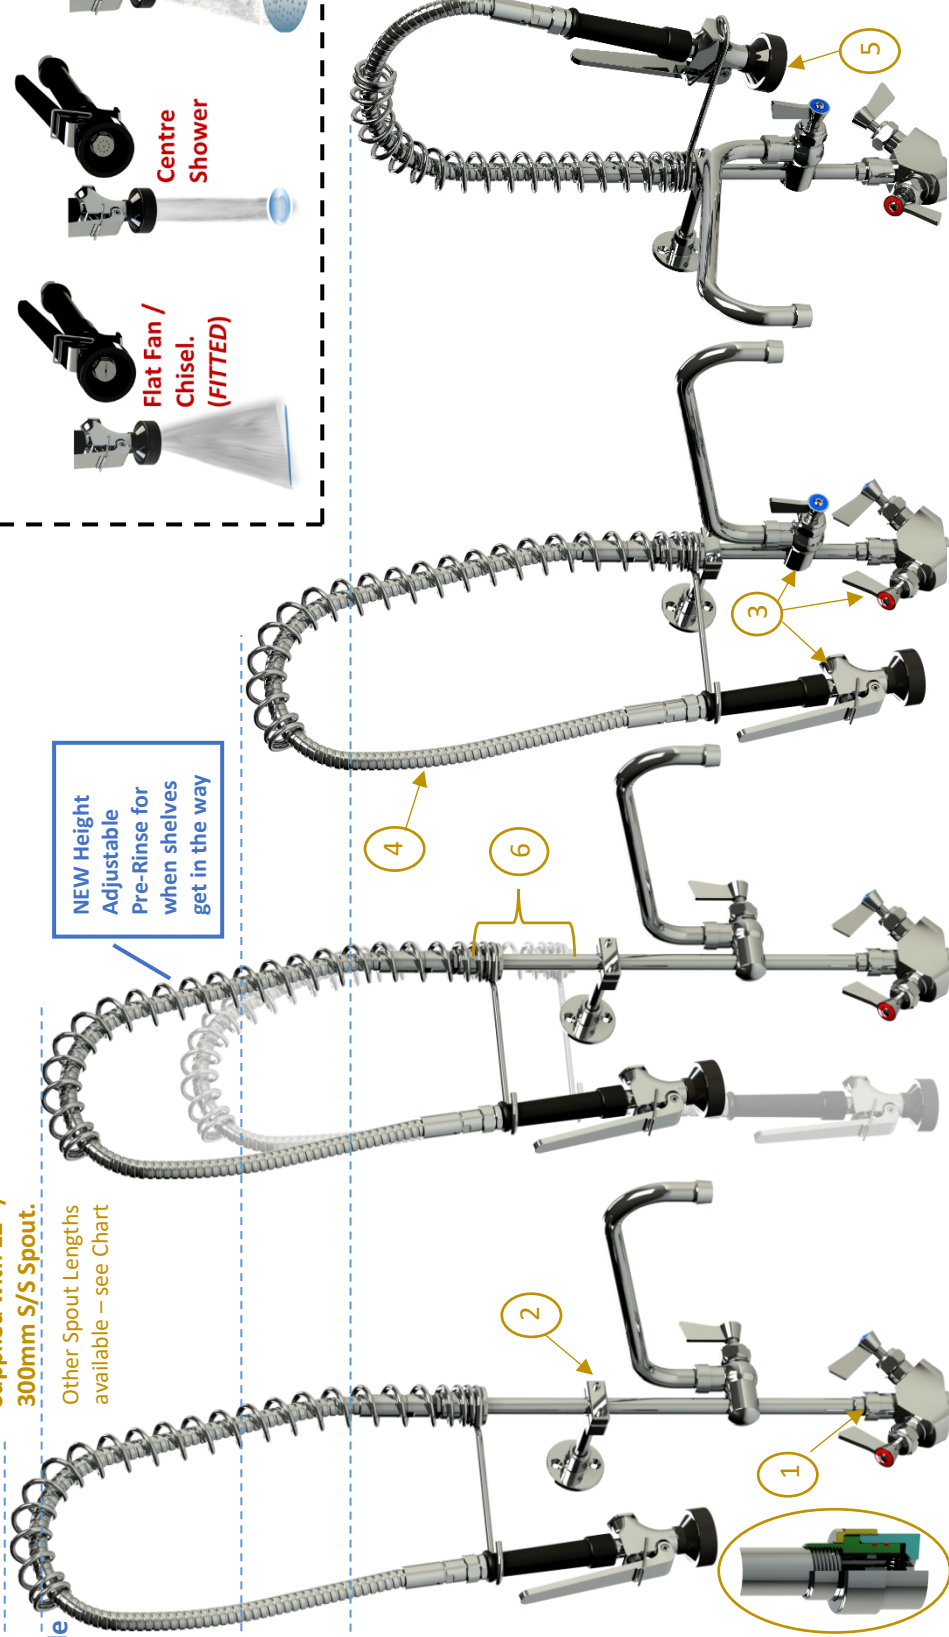

TALL

Pt. No. GF032512

TALL - Adjustable

Pt. No. GF032512-A

MIDI

Pt. No. GF032512-M

Cafe

Pt. No. GF032512-C



1. DROP N LOCK = fast assembly
2. Adjustable Wall Bracket.
3. Repair Kits AVAILABLE
4. S/S Super Tuff Armour-flex w- 1/2" fi Swivel ends
5. Australia's first Water Saving Spray Gun & still the MOST Reliable on Market.
6. Adjustable Spring Retainer. The First in the World. Designed & Made in Australia by GT.

NOTE: All Parts are Replaceable Nationally via Plumbing Stores


SINGLE DUAL Tap Feed: – HOT & COLD

TALL


TALL - Adjustable

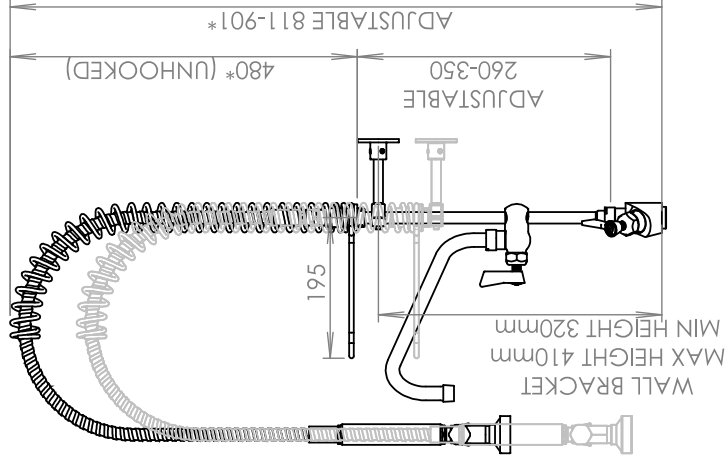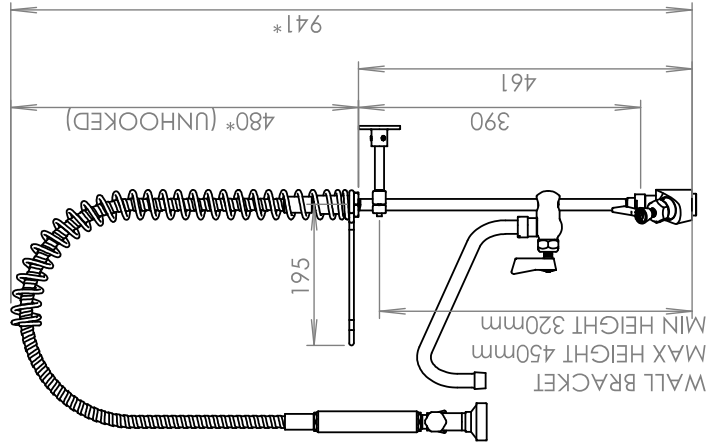

MIDI

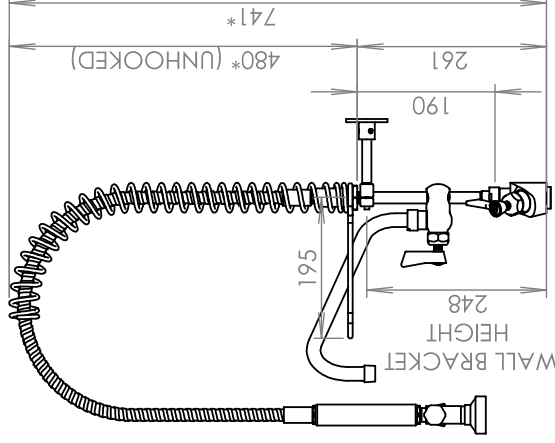


Café / SHORT

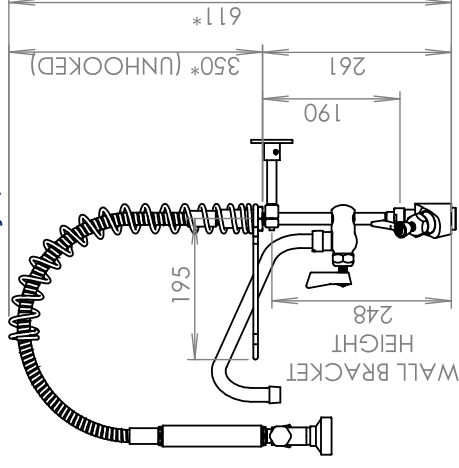


SPOUT CHART - Tall Model (applies to the other models w- suffix)		
PART No.	MODEL	Length
GF032506	6"	150mm
GF032508	8"	200mm
GF032510	10"	250mm
GF032512	12"	300mm
GF032514	14"	350mm
GF032516	16"	400mm

Products must be installed by registered Plumber in accordance with the PCA and


ISOMETRIC View

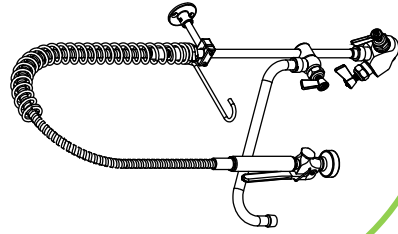

TOP View

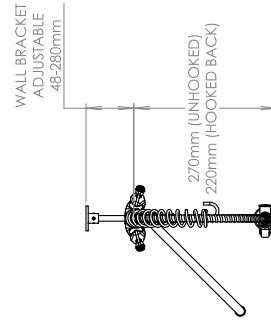


FRONT View

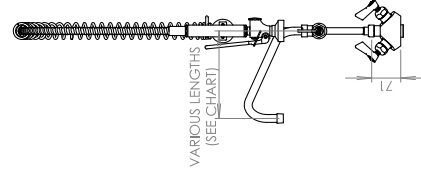

"KNUCKLE" -Sold separately. Pt. no. G83KL

Supplied with all 'RO' Units only. The "Knuckle" allows for variable angles of secure fastening of the pre-rinses to wall.

Mounting

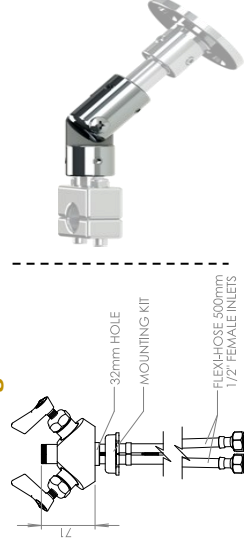

Technical: -

Aust. Standards.
"LEAD FREE"

:Watermarked
Lic. 23008

: T14468

WELS Reg. No.
1st's Outlet Spray Gun:

: 6 Stars
: 4.5 lpm
: 9 lpm

2nd Outlet Flow Rate - Spout

: 32mm
: Polished 304 S/S
: 500kpa. (NPC)
: 1500kpa.
: 1 - 65° C.

Mounting Hole
All Metal Material
Working Press.
Max. Press. Rate
Operating Temp

Inlet Hoses Specify this Temperature.

Pt. No. - **GF032512-SS**

The **‘KNUCKLE’** Allows Adjustable Wall Bracketing. Supplied w- RO PR taps for height adjustable sinks.



**LOW
ATOMIZED
Spray Tip Fitted**

Key Features

- **Premium Material:** Constructed from polished 304 stainless steel (S/S).
- **Inner Tube of Pre-Rinse Hose:** Santoprene rubber with S/S Braid cover and another Protective outer S/S Spiral Sheath.
- **Watermarked PR HOSE:** Separately Tested & passed to AS4020 & AS3499.
- **Safety & Convenience:** Squeeze lever with lock-on and quick-release shut-off (OH&S feature).
- **Riser Sub-Assembly:** Made & tested in our Brisbane Factory.
- **Wall Bracket:** Was Designed & Made Specifically for Height Adjustable Sink Tables in mind.
- **Soft Spray Tip:** From End-User feed-back we Redesigned & made this current **Soft Spray Tip** specifically for minimizing the **Atomization of over spray** to the lowest amount possible.
- **Food Prep:** This Spray Tip can also be used in Food preparation areas to avoid bruising.
- **Interchangeable tips:** Other types of tips are available – see back page.

Warranty

- **Commercial Use:** 36 months

Technical: -

Australian Standards	: Watermarked
Lead Free	Lic. 23008
WELS Reg. No.	: T14468
1sts Outlet	Spray Gun – Flat Fan Tip
WELS Rated	: 6 Stars
Flow Rate	: 4.5 lpm
2nd Outlet	: Spout
WELS Rated	: 3 Stars
Flow Rate	: 9 lpm
Tap Mounting Hole	: 25mm
Material	: 304 S/S
Finish	: Polished S/S
Working Press.	: 500kpa. (NPC)
Max. Press. rate	: 1500kpa.
Tap Operating Temp	: 1 - 65° C.

Global Tapware Pty Ltd



E – info.tech@globaltapware.com

P – 07 38 55 2350

P – 1300 85 25 15

W- GLOBALTAPWARE.COM.AU

Product must be installed by registered Plumber in accordance with the PCA and AS/NZS3500.

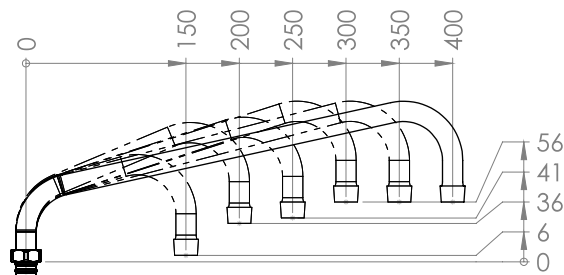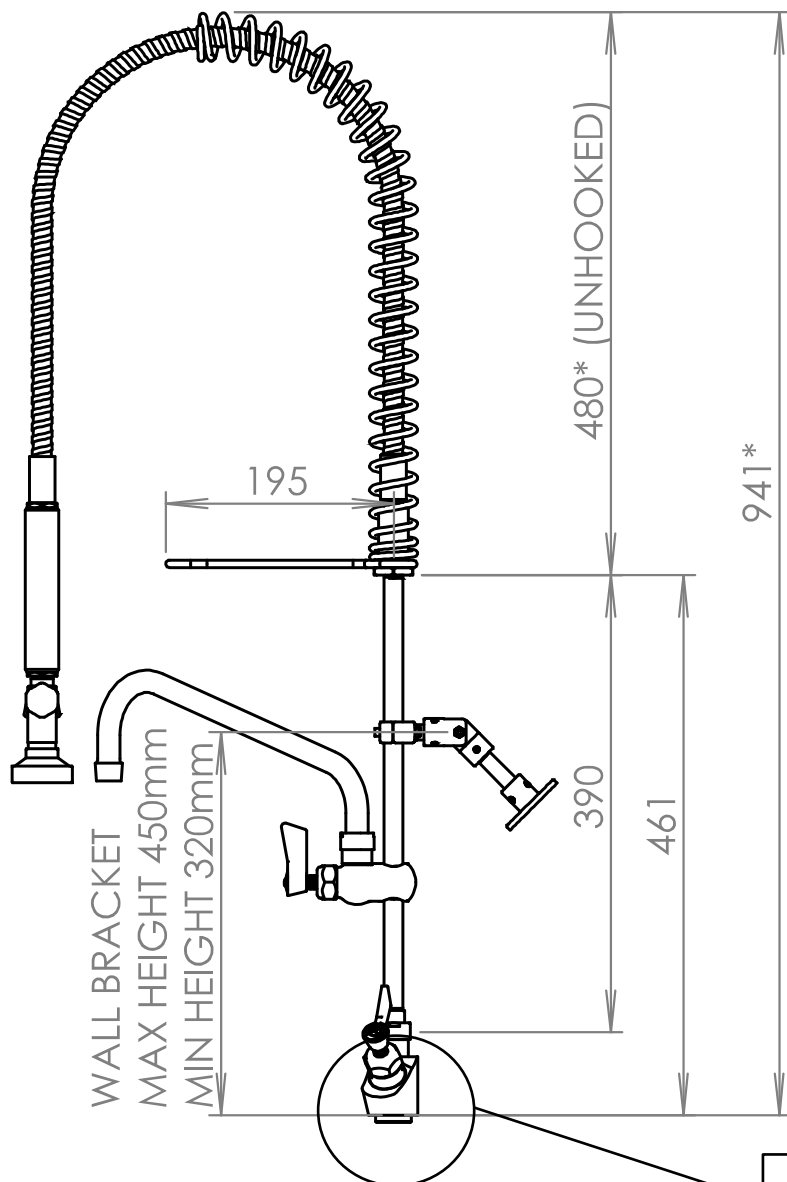

REF	LENGTH IN/MM	PART NO.
A	6" /179mm	GS3006
B	8" /227mm	GS3008
C	10" /276mm	GS3010
D	12" /326mm	GS3012
E	14" /376mm	GS3014

Other SPRAY GUN INTERCHANGABLE SPRAY TIPS


Other Spray Tip Supplied

FLAT FAN



Other Spray Tip Supplied


SHOWER

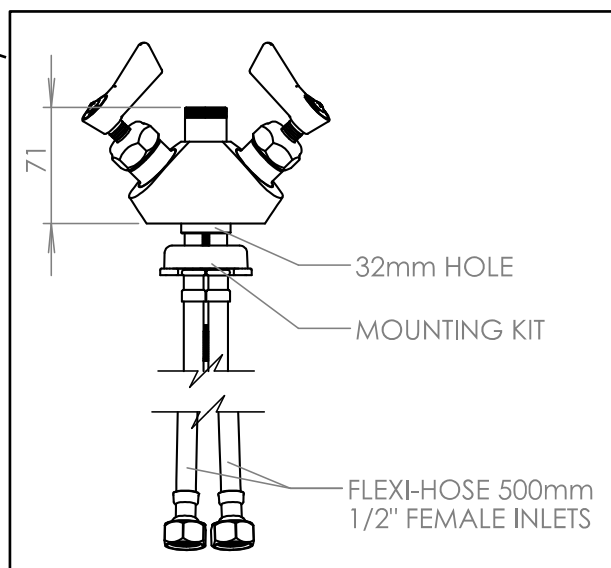

Tall
Adjustable
Midi
Cafe

Supplied with 12" / 300mm S/S Spout.
Other Spout Lengths available – See chart

SPRAY GUN INTERCHANGABLE SPRAY TIPS

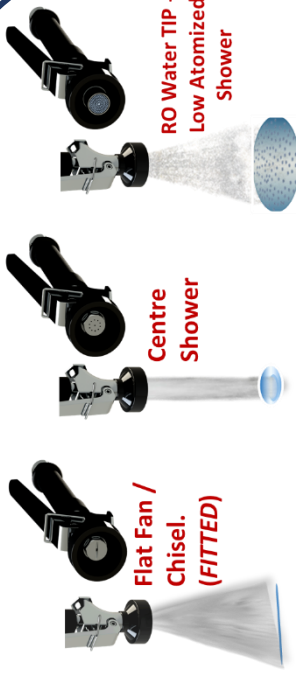


WaterMark
AS3718
Certificate No: 23008
Global Tapware Pty Ltd

WARRANTY:
36 months
from Install
date.



NEW Height
Adjustable
Pre-Rinse for
when shelves
get in the way

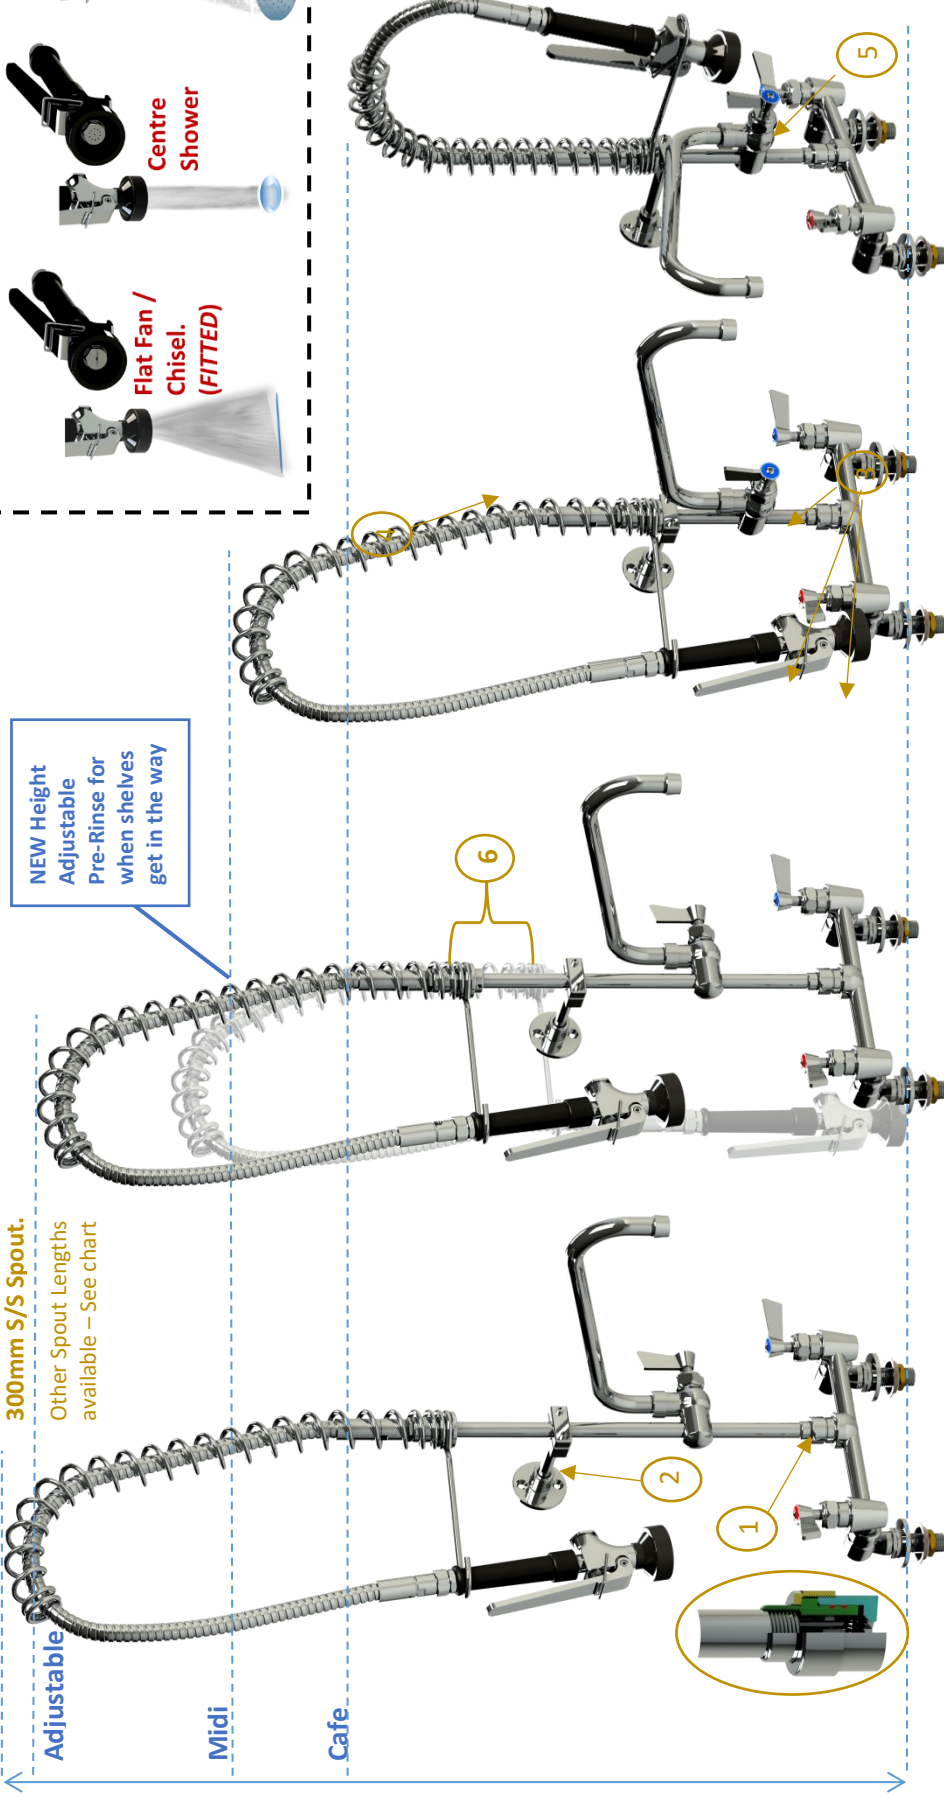

TALL

Pt. No. GF042512

TALL - Adjustable

Pt. No. GF042512-A

MIDI

Pt. No. GF042512-M

Cafe


Pt. No. GF042512-C

1. DROP N LOCK = fast assembly
2. Adjustable Wall Bracket.
3. Repair Kits AVAILABLE
4. S/S Super Tuff Armour-flex w- 1/2" fi Swivel ends
5. Australia's first Water Saving Spray Gun & still the MOST Reliable on Market.
6. Adjustable Height, The First in the World. Designed & Made in Australia by GT.


NOTE: All Parts are Replaceable Nationally via Plumbing Stores

FIXED EXPOSED BREACH – HOB – Dual Feed: – HOT & COLD



TALL

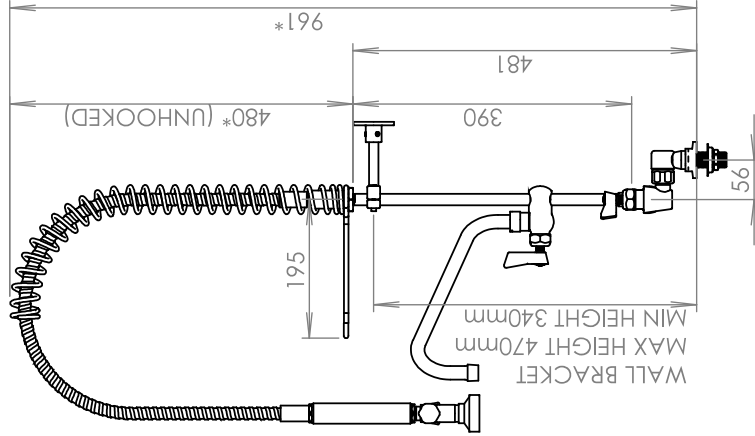

TALL - Adjustable

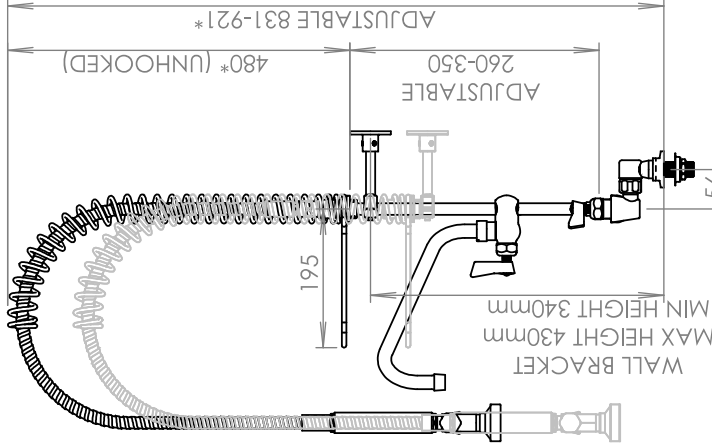


MIDI

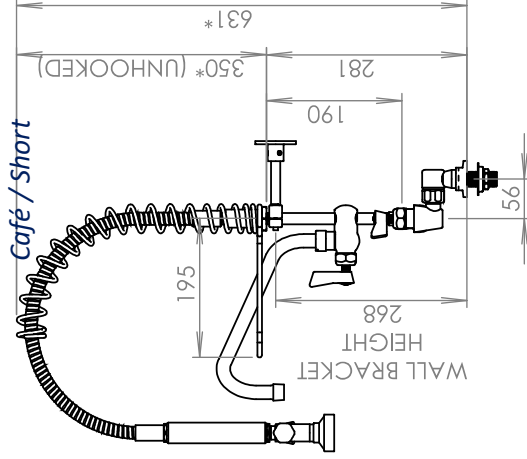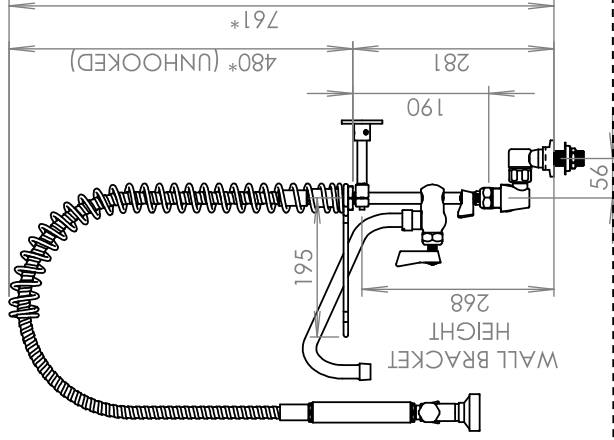


SPOUT CHART - Tall Model (applies to the other models w- suffix)		
PART No.	MODEL	Length
GF042506	6"	150mm
GF042508	8"	200mm
GF042510	10"	250mm
GF042512	12"	300mm
GF042514	14"	350mm
GF042516	16"	400mm

Products must be installed by registered Plumber in accordance with the PCA and AS/NZS53500.


ISOMETRIC View

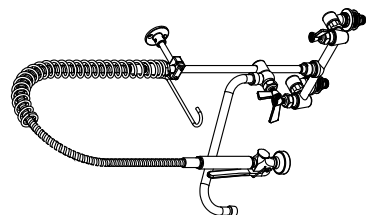

TOP View

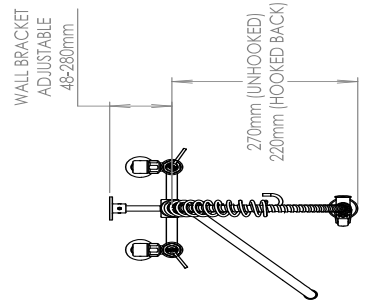

FRONT View

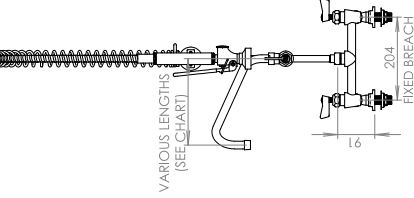

"KNUCKLE" - Sold separately. Pt. no. G83KL

Supplied with all "RO" Units only. The "Knuckle" allows for variable angles of secure fastening of the pre-rinses to wall.



MOUNT View



Technical: -

Aust. Standards.
"Lead Free"

: Watermarked
Lic. 23008

: TM41647

WELS Reg. No.
1sts Outlet Spray Gun:

: 6 Stars

: 4.5 lpm

: 9 lpm

WELS Rated
2nd Outlet Flow Rate
Flow Rate -

: 25mm

: Polished 304 S/S
: 500kpa. (NPC)

: 1500kpa.

: 1 - 80° C.

Mounting Hole
All Metal Material
Working Press.
Max. Press. Rate
Operating Temp

All parts are **STAINLESS STEEL** = Lead Free (LF)

Supplied with 12" /
300mm S/S Spout.
Other Spout Lengths
available – see chart

Tall
Adjustable

Midi

Cafe


SPRAY GUN INTERCHANGABLE SPRAY TIPS



NEW Height
Adjustable
Pre-Rinse for
when shelves
get in the way



WARRANTY:
36 months
from Install
date.

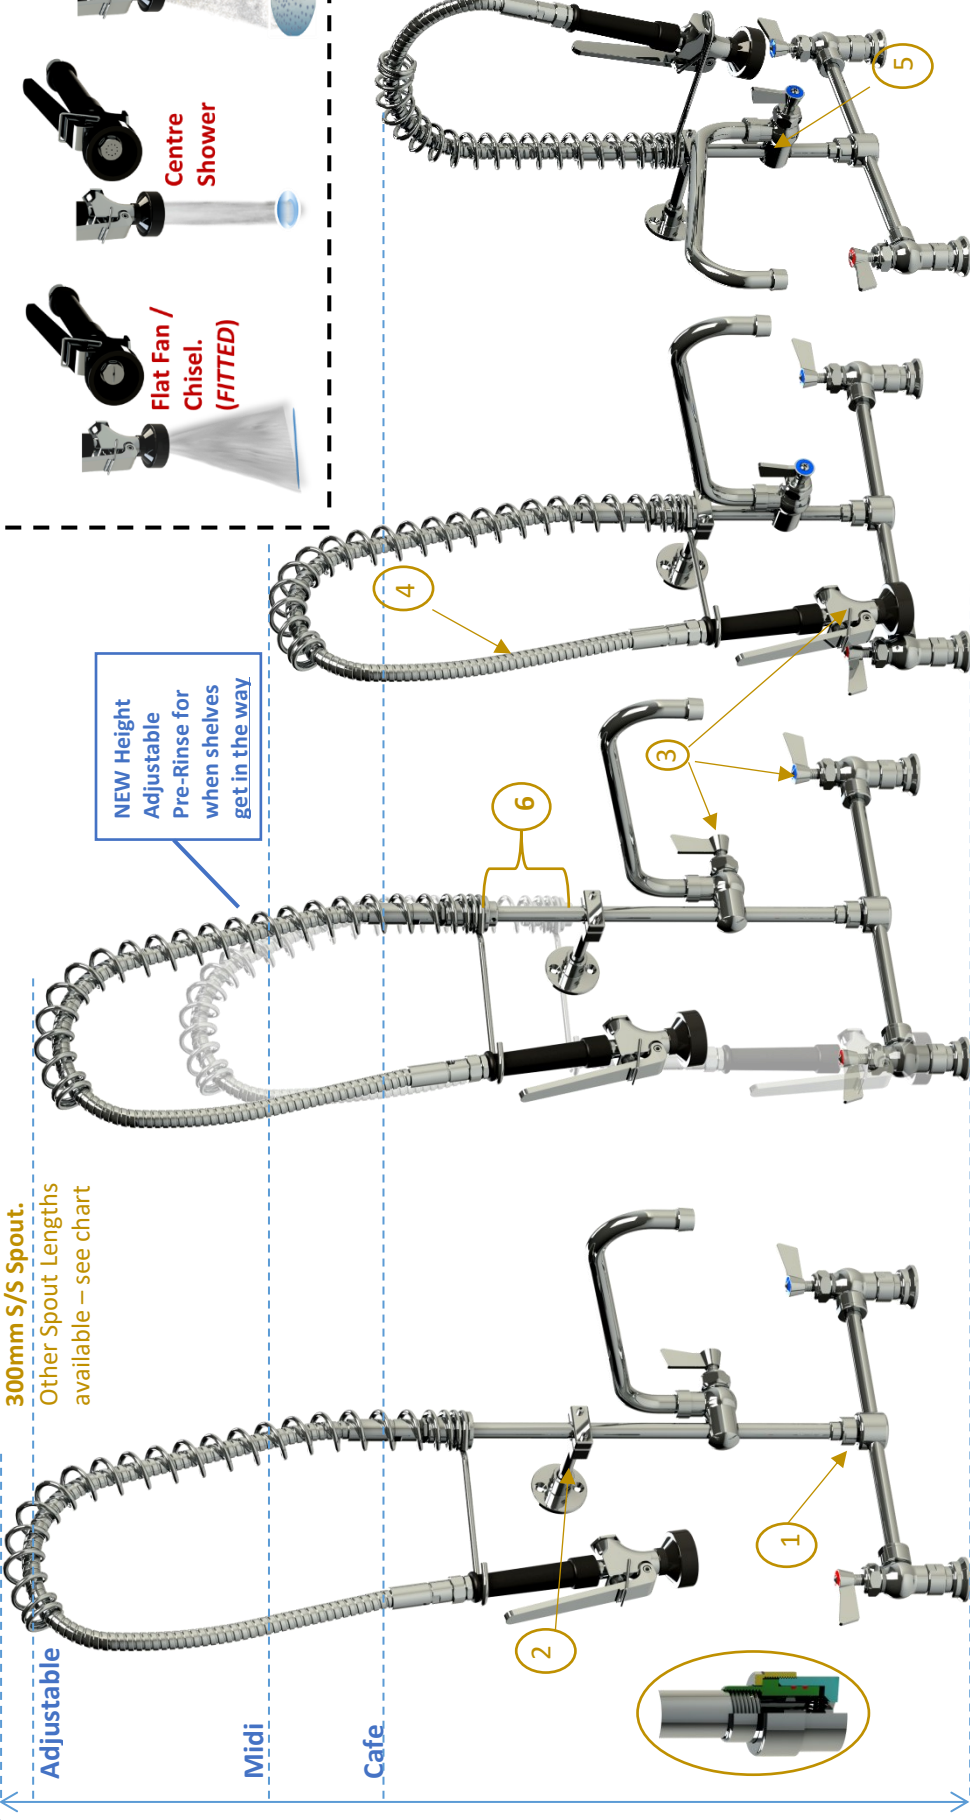


1. DROP N LOCK = fast assembly
2. Adjustable Wall Bracket.
3. Repair Kits AVAILABLE
4. S/S Super Tuff Armour-flex w- 1/2" fi Swivel ends
5. Australia's first Water Saving Spray Gun & still the MOST Reliable on Market.
6. Adjustable Spring Retainer. The First in the World. Designed & Made in Australia by GT.


NOTE: All Parts are Replaceable Nationally via Plumbing Stores

Adjustable EXPOSED BREACH – HOB – Dual Feed: – HOT & COLD


TALL

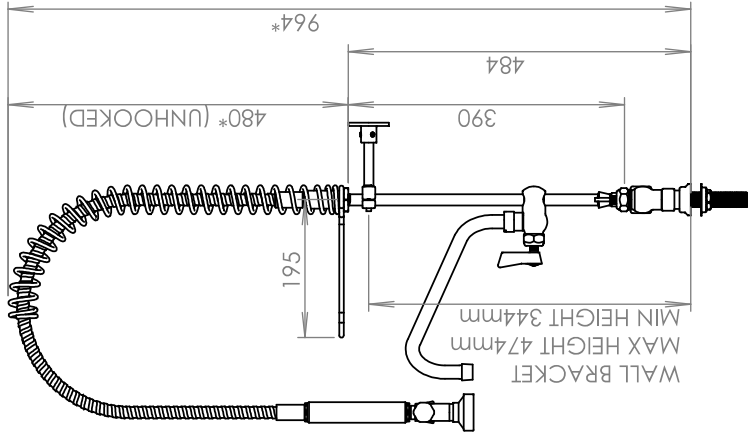


TALL - Adjustable

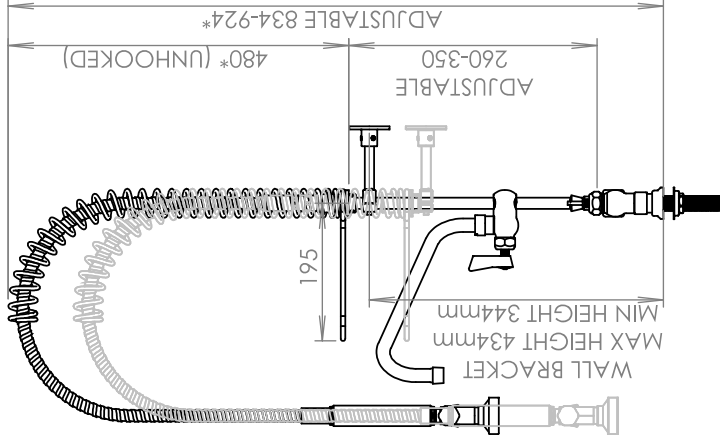

MIDI

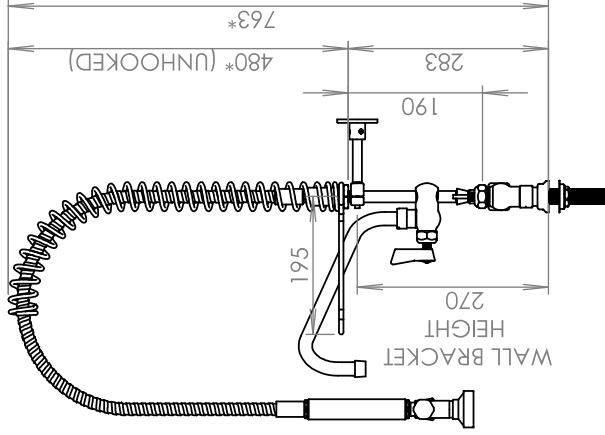


Café / SHORT

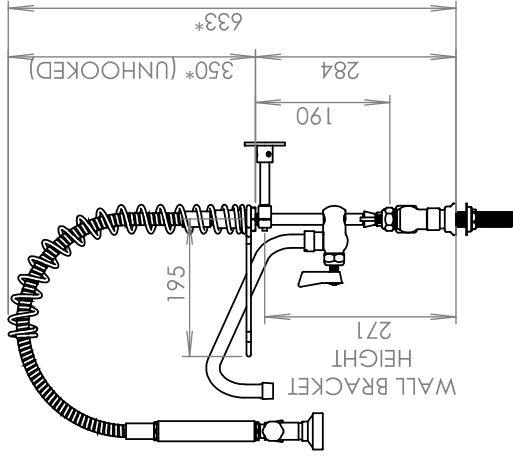


SPOUT CHART - Tall Model (applies to the other models w- suffix)		
PART No.	MODEL	Length
GF052506AB	6"	150mm
GF052508AB	8"	200mm
GF052510AB	10"	250mm
GF052512AB	12"	300mm
GF052514AB	14"	350mm
GF052516AB	16"	400mm

Products must be installed by registered Plumber in accordance with the PCA and AS/NZS3500.


ISOMETRIC View

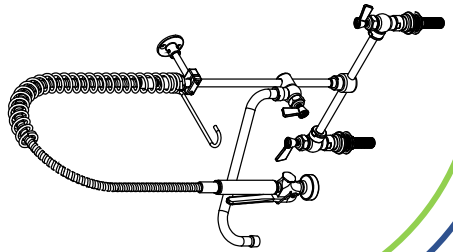

TOP View

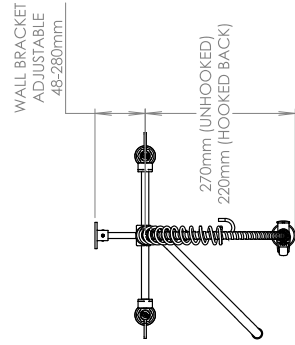

FRONT View

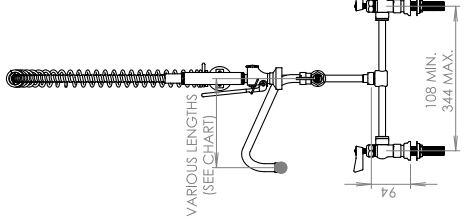

"KNUCKLE" - Sold separately. Pt. no. G83KL

Supplied with all 'RO' Units only. The "Knuckle" allows for variable angles of secure fastening of the pre-rinses to wall.



MOUNT View



Technical: -

Aust. Standards.
"Lead Free"

: Watermarked
Lic. 23008

: TM41647

WELS Reg. No.
1sts Outlet Spray Gun:

: 6 Stars

: 4.5 lpm

: 9 lpm

WELS Rated
Flow Rate

2nd Outlet SPOUT

Mounting Hole

All Metal Material

Working Press.

Max. Press. Rate

Operating Temp

:25mm


Polished 304 SIS

:500kpa. (NPC)

:1500kpa.

: 1 - 80° C.

Made from 304 **STAINLESS STEEL** = Lead Free (LF)

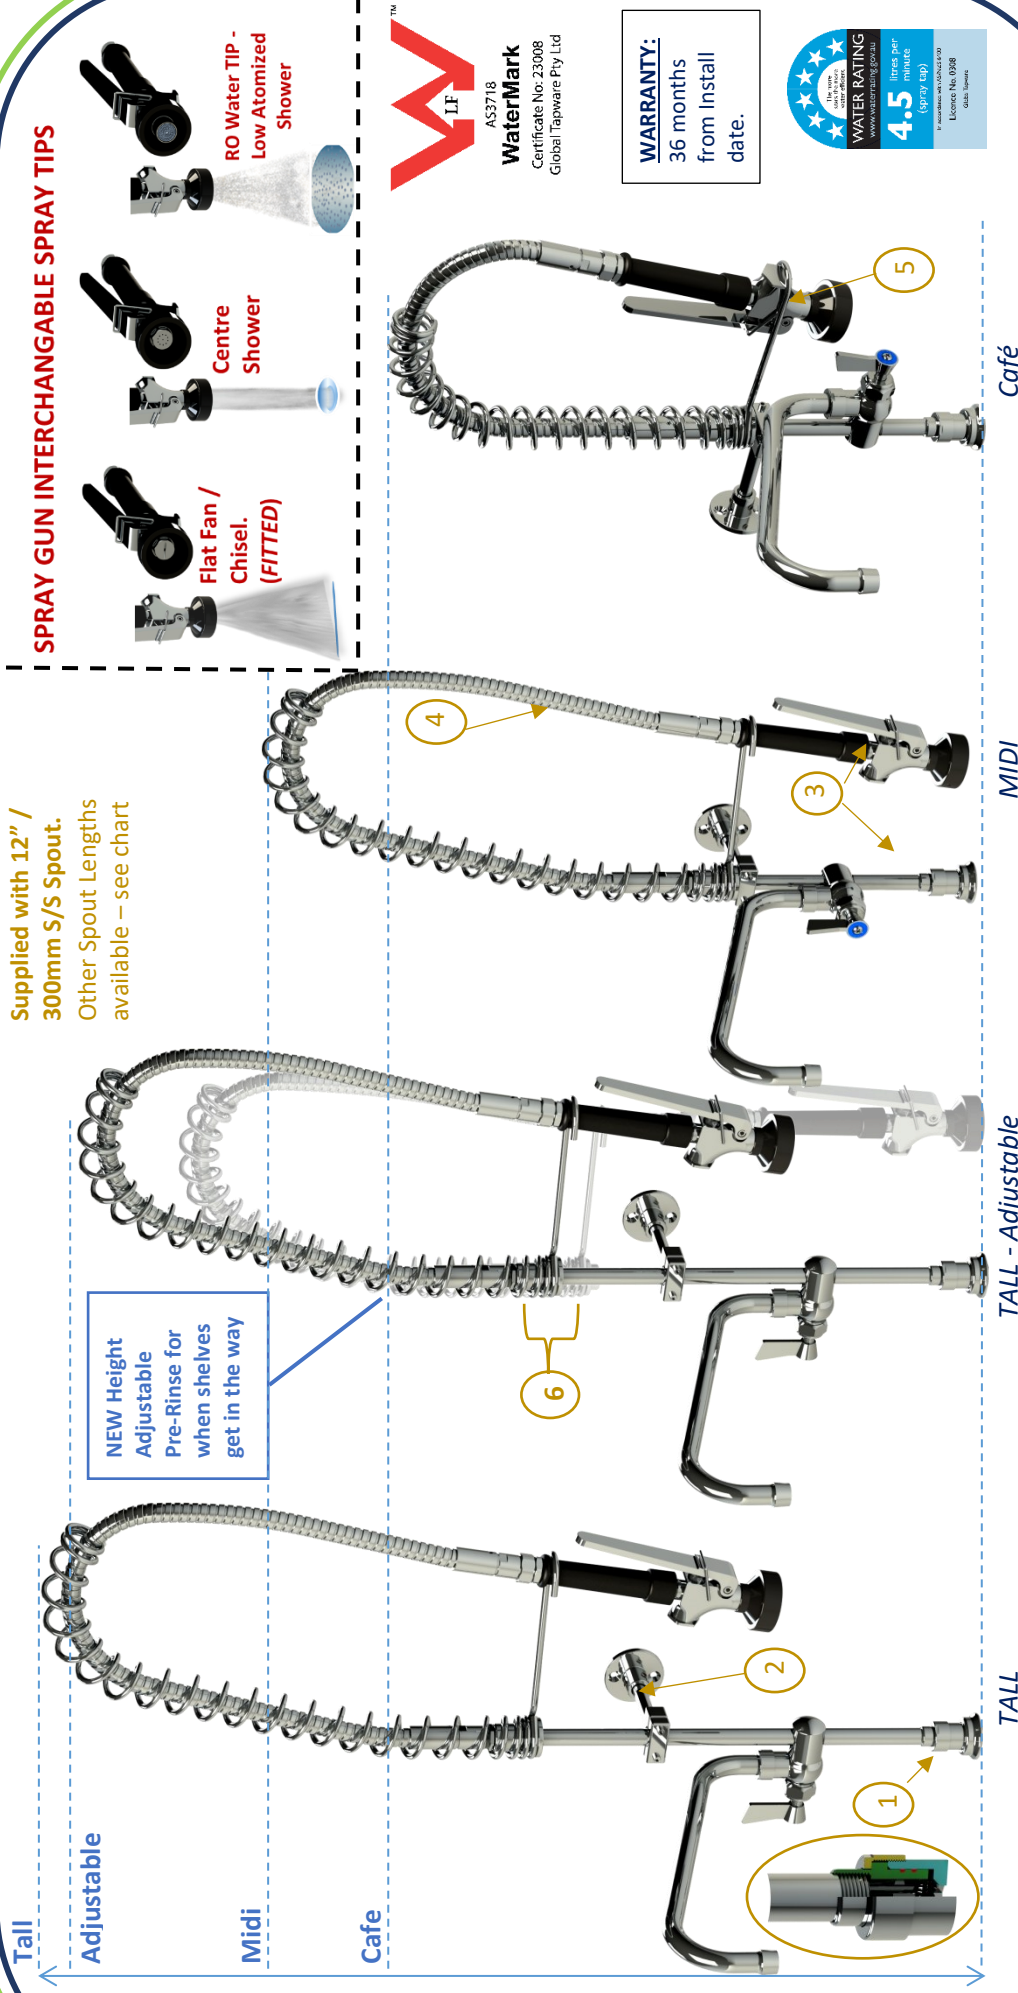


NOTE: All Parts are Replaceable Nationally via Plumbing Stores

Hob Outlet (No tap) only, Feed: – HOT or COLD or Mixed


Products must be installed by registered Plumber in accordance with the PCA and AS/NZS3500.

SPOUT CHART - Tail Model (applies to the other models w- suffix)		
PART No.	MODEL	Length
GF062506	6"	150mm
GF062508	8"	200mm
GF062510	10"	250mm
GF062512	12"	300mm
GF062514	14"	350mm
GF062516	16"	400mm


TALL

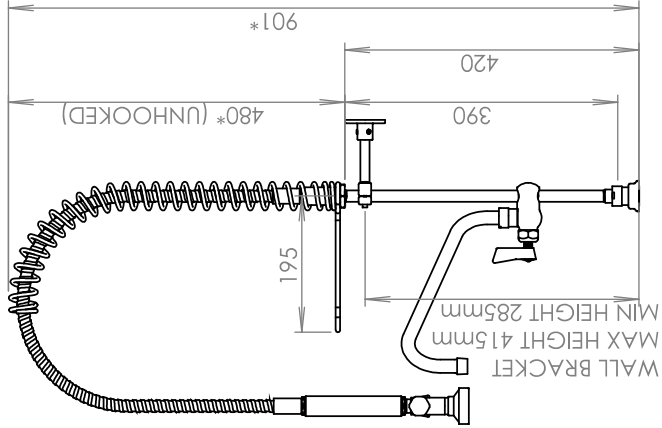


TALL - Adjustable

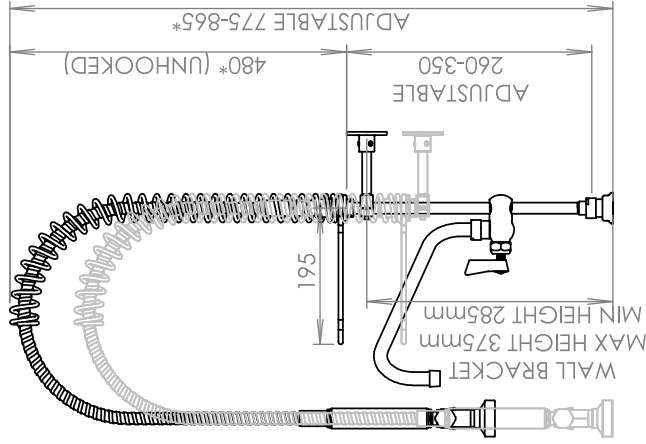


MIDI

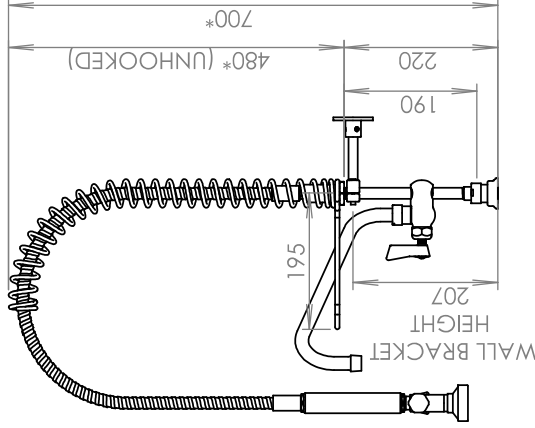


Café / Short

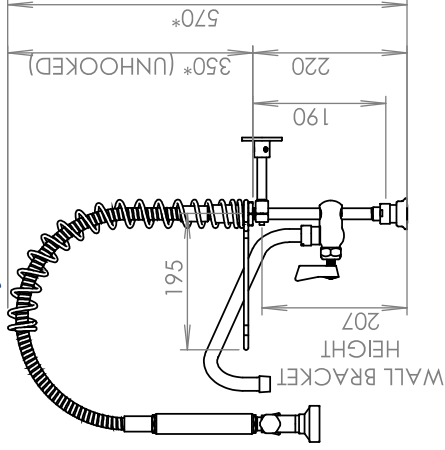


ISOMETRIC View

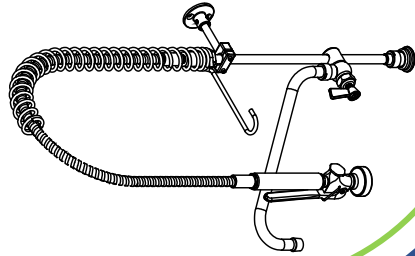

TOP View

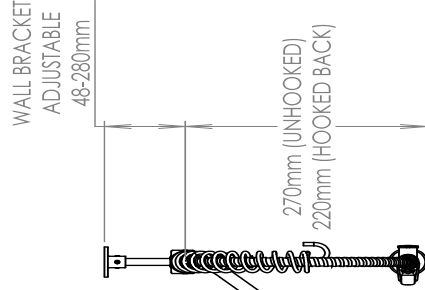

FRONT View

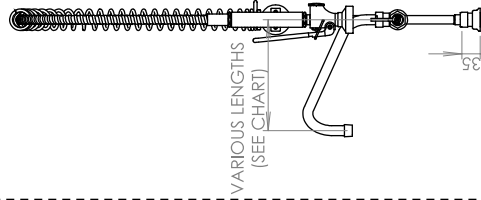


"KNUCKLE" -Sold separately. Pt. no. **G83KL**

Supplied with all "RO" Units only. The "Knuckle" allows for variable angles of secure fastening of the pre-rinses to wall.



MOUNT View

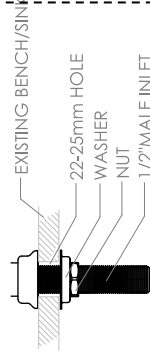

Technical: -
Aust. Standards.
"LEAD FREE"

: Watermarked
Lic. 23008

: **TM41648**

WELS Reg. No.
1sts Outlet Spray Gun:
WELS Rated
Flow Rate
Flow Rate - 2nd Outlet

: **6 Stars**

: **4.5 lpm**

: **9 lpm**

: **25mm**

: **Polished 304 S/S**

: **500kpa. (NPC)**

: **1500kpa.**

: **1 - 80° C.**

Mounting Hole
All Metal Material
Working Press.
Max. Press. Rate
Operating Temp

Made from 304 **STAINLESS STEEL** = Lead Free (LF)

Tall
Adjustable
Mid
Café

Supplied with 12" /
300mm S/S Spout.
Other Spout Lengths
available – see chart


SPRAY GUN INTERCHANGABLE SPRAY TIPS



NEW Height
Adjustable
Pre-Rinse for
when shelves
get in the way



WARRANTY:
36 months
from Install
date.

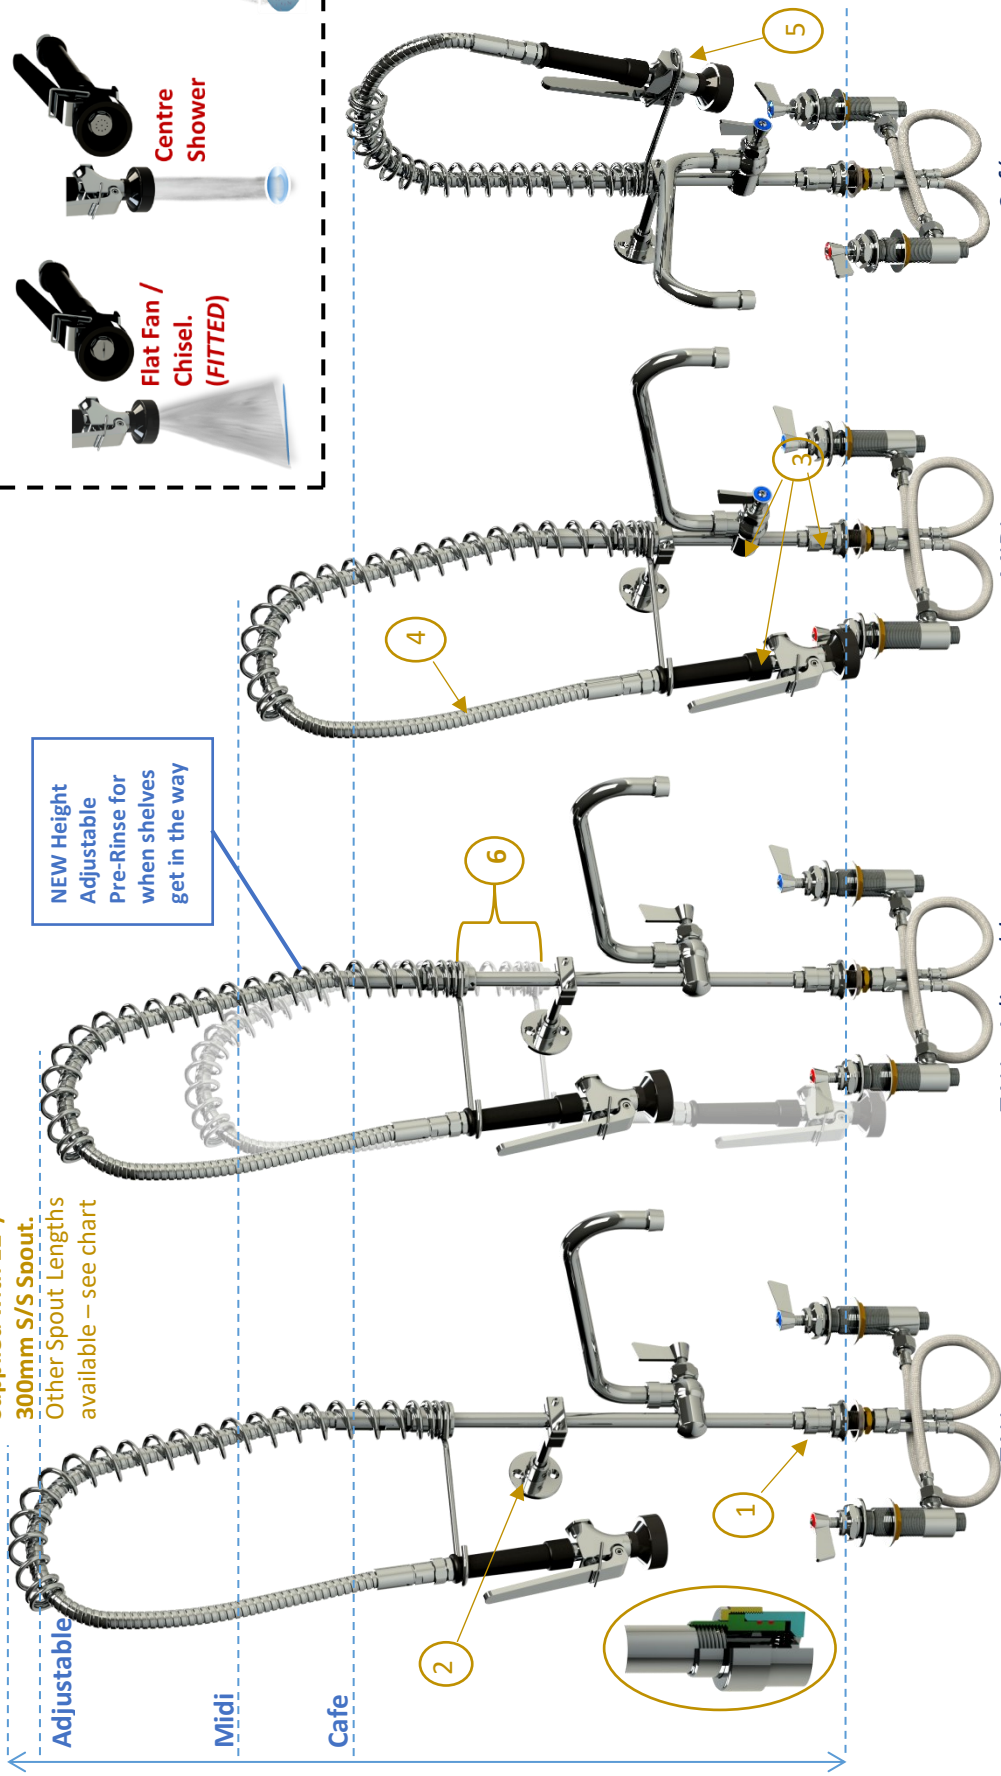

TALL
Pt. No. GF072512

TALL - Adjustable
Pt. No. GF072512-A

MIDI
Pt. No. GF072512-M

Café
Pt. No. GF072512-C

1. DROP N LOCK = fast assembly
2. Adjustable Wall Bracket.
3. Repair Kits AVAILABLE
4. S/S Super Tuff Armour-flex w- 1/2" fi Swivel ends
5. Australia's first Water Saving Spray Gun & still the MOST Reliable on Market.
6. Adjustable Spring Retainer. The First in the World. Designed & Made in Australia by GT.


NOTE: All Parts are Replaceable Nationally via Plumbing Stores

Hidden Breach Hob Feed: – HOT & COLD


Products must be installed by registered Plumber in accordance with the PCA and AS/NZS3500.

SPOUT CHART - Tall Model (applies to the other models w- suffix)		
PART No.	MODEL	Length
GF072506	6"	150mm
GF072508	8"	200mm
GF072510	10"	250mm
GF072512	12"	300mm
GF072514	14"	350mm
GF072516	16"	400mm


TALL

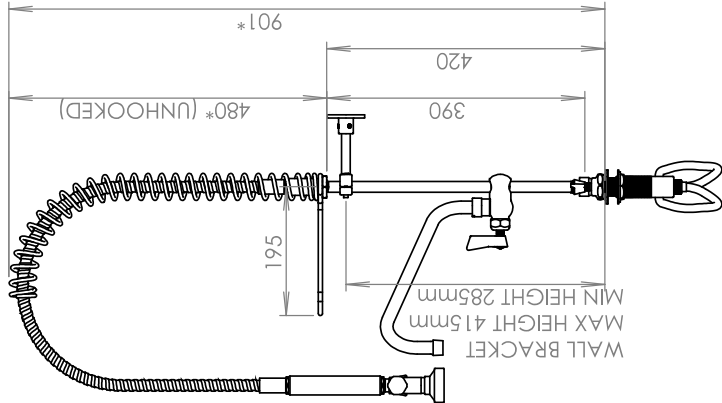


TALL - Adjustable

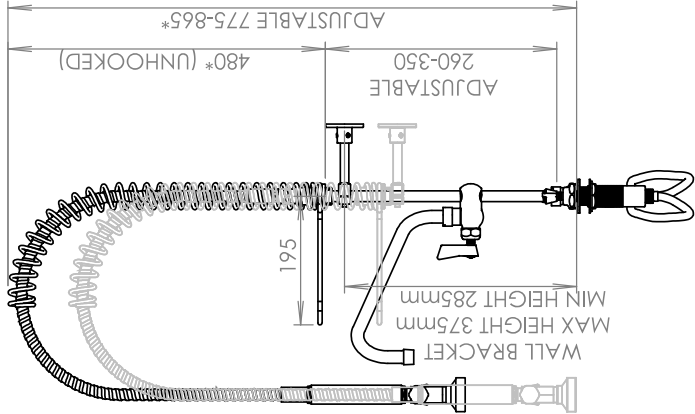


MIDI

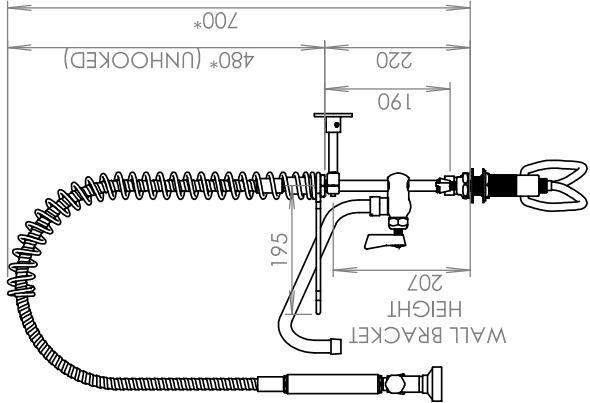


Café / Short

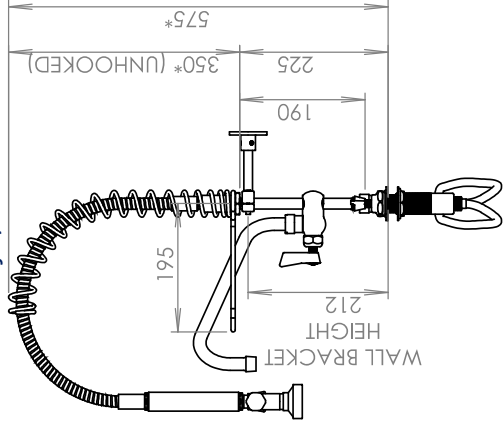


ISOMETRIC View

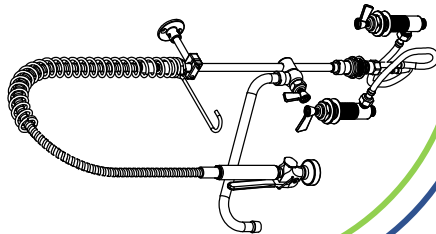

TOP View

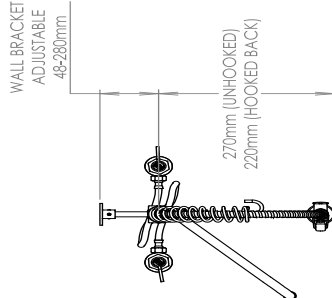


FRONT View

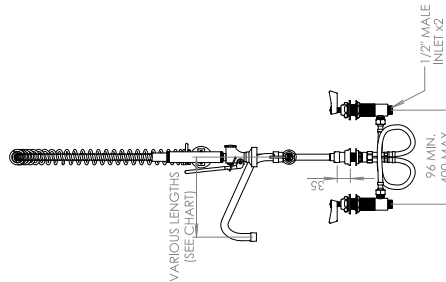

“KNUCKLE” - Sold separately. Pt. no. G83KL

Supplied with all ‘RO’ Units only. The “Knuckle” allows for variable angles of secure fastening of the pre-rinses to wall.

MOUNT View

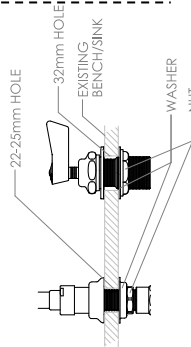

Technical: -
Aust. Standards.
“LEAD FREE”

- WELS Reg. No.
- 1sts Outlet Spray Gun:
- WELS Rated
- Flow Rate
- 2nd Outlet – SPOUT

- Mounting Hole
- All Metal Material
- Working Press.
- Max. Press. Rate
- Operating Temp

- : Watermarked Lic. 23008
- : TM41648
- : 6 Stars
- : 4.5 lpm
- : 9 lpm
- : 25mm
- : Polished 304 S/S
- : 500kpa. (NPC)
- : 1500kpa.
- : 1 - 80° C.



GLOBAL TAPWARE

Manufacturers of Quality Commercial Tapware



WWW.GLOBALTAPWARE.COM.AU

P1 - 07 3855 2350

P2 – 1300 85 25 15

E – info.tech@globaltapware.com