

GLOBAL *FISHER* PRE-RINSES

- HOB MOUNT -

STANDARD

MODELS

BROCHURE BOOK models:

GF02, GF03, GF04, GF05, GF06, GF07

QR Code
insert



INDEX

GLOBAL FISHER brand


Technical Drawings for: HOB Pre-Rinses STANDARD

PAGE		PRODUCT CODE
		Single HOB Tap
4 - 5		GF022100 Tall
4 - 5		GF022100-A Adjustable
4 - 5		GF022100-M Midi
4 - 5		GF022100-C Short / Café
6 - 7		GF022100-SS RO Water & FOOD Prep
8 - 9		GF022100-TMV THERMOSTATIC VALVE
		DUAL HOB Tap
10 - 11		GF032100 Tall
10 - 11		GF032100-A Adjustable
10 - 11		GF032100-M Midi
10 - 11		GF032100-C Short / Café
12 - 13		GF032100-SS RO Water & FOOD Prep
		FIXED Exposed Breach HOB Tap
14 - 15		GF042100 Tall
14 - 15		GF042100-A Adjustable
14 - 15		GF042100-M Midi
14 - 15		GF042100-C Short / Café
		Adjustable Exposed Breach HOB Tap
16 - 17		GF052100AB Tall
16 - 17		GF052100AB-A Adjustable
16 - 17		GF052100AB-M Midi
16 - 17		GF052100AB-C Short / Café
		HOB Outlet Only (No HOB tap)
18 - 19		GF062100 Tall
18 - 19		GF062100-A Adjustable
18 - 19		GF062100-M Midi
18 - 19		GF062100-C Short / Café
		Adjustable Hidden Breach HOB Tap
20 - 21		GF072100 Tall
20 - 21		GF072100-A Adjustable
20 - 21		GF072100-M Midi
20 - 21		GF072100-C Short / Café
22 - 23	Blank	

Made from 304 **STAINLESS STEEL** = Lead Free

*Ro Units – See separate brochure

SPRAY GUN INTERCHANGABLE SPRAY TIPS

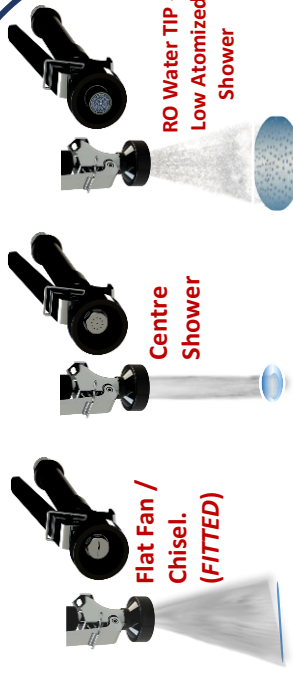


Tall

Adjustable

Midi

Cafe

NEW Height Adjustable Pre-Rinse for when shelves get in the way

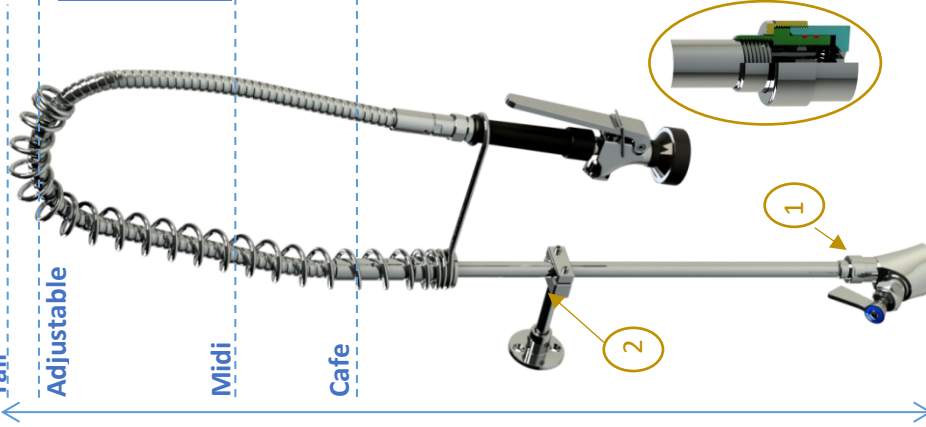

TALL

Pt. No. GF022100

TALL - Adjustable

Pt. No. GF022100-A

MIDI



Pt. No. GF022100-M

Cafe

Pt. No. GF022100-C



WARRANTY:
36 months
from Install
date.

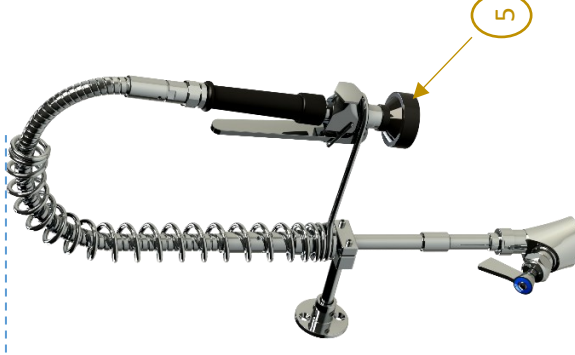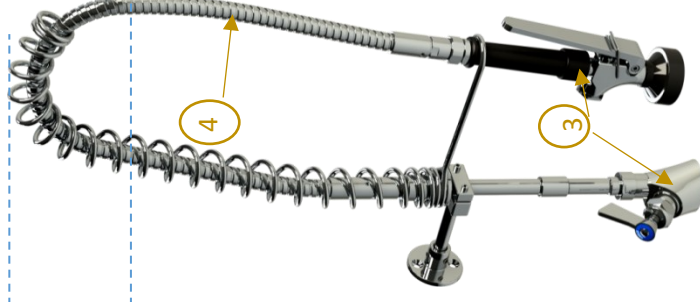


1. DROP N LOCK = fast assembly
2. Adjustable Wall Bracket.
3. Repair Kits AVAILABLE
4. S/S Super Tuff Armour-flex w- 1/2" fi Swivel ends
5. Australia's first Water Saving Spray Gun & still the MOST Reliable on Market.
6. Adjustable Spring Retainer.


The First in the World. Designed & Made in Australia by GT.

NOTE: All Parts are Replaceable Nationally via Plumbing Stores


SINGLE Tap Feed: -- HOT or COLD or MIXED

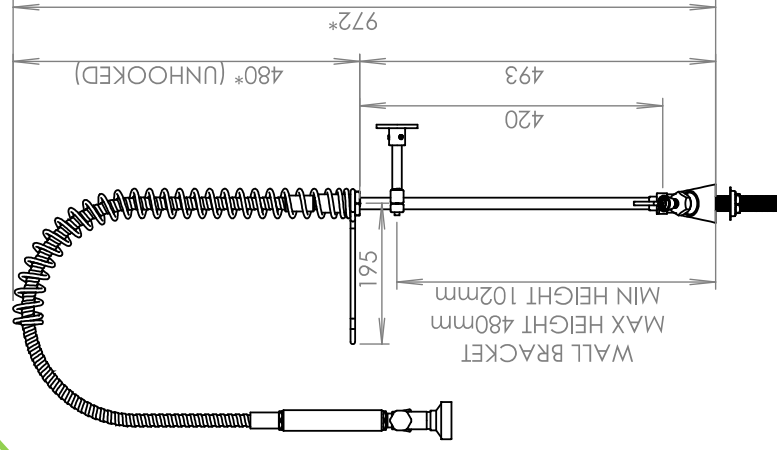

TALL

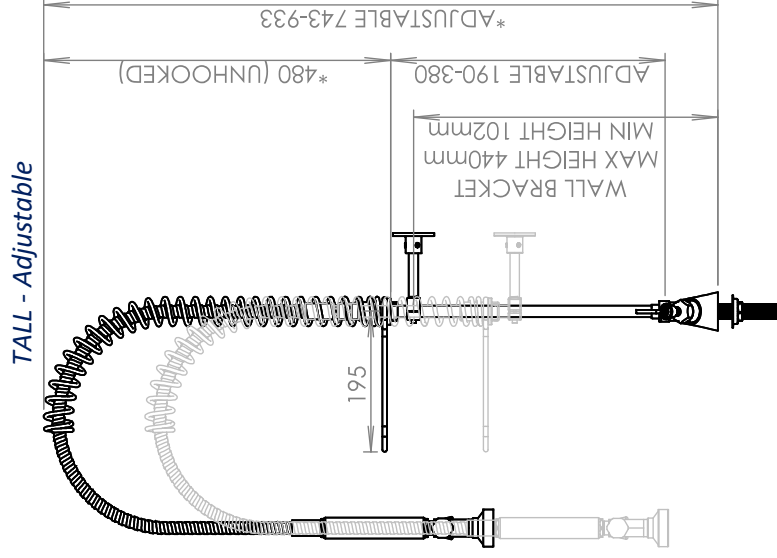


MIDI

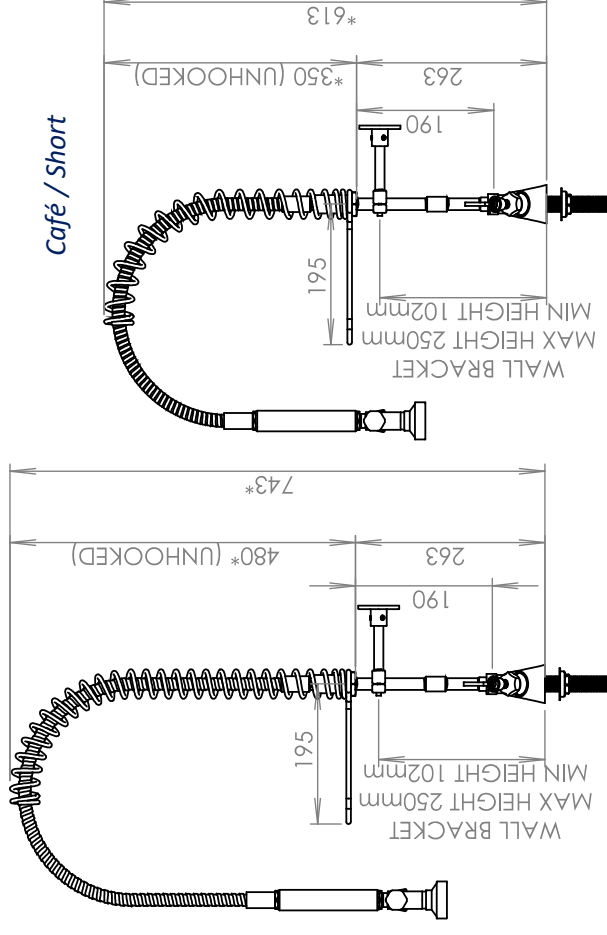


Café / Short

Product must be installed by registered Plumber in accordance with the PCA and AS/NZS3500.


ISOMETRIC View

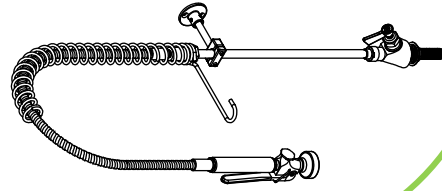

TOP View

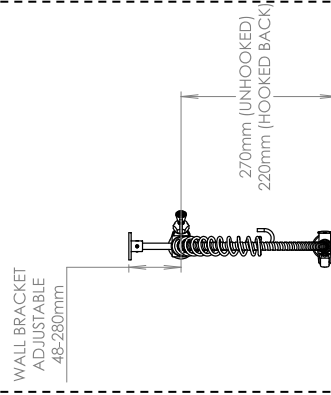

FRONT View




"KNUCKLE" -Sold separately. Pt. no. G83KL

Supplied with all 'RO' Units only. The "Knuckle" allows for variable angles of secure fastening of the pre-rinses to wall.



MOUNT View

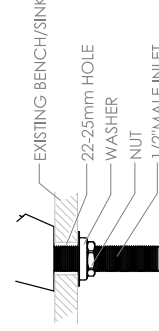

Technical: -

Aust. Standards. "LEAD FREE"

WELS Reg. No. 1st Outlet Spray Gun: WELS Rated Flow Rate

Mounting Hole All Metal Material Working Press. Max. Press. Rate Operating Temp.

: Watermarked Lic. 23008
: TM41493
: 6 Stars
: 4.5 lpm
: 25mm
: Polished 304 S/S
: 500kpa (NPC)
: 1500kpa.
: 1 - 80° C.

Pt. No. - **GF022100-SS**

The '**KNUCKLE**' Allows Adjustable Wall Bracketing. Supplied w- RO PR taps for height adjustable sinks.



**LOW
ATOMIZED
Spray Tip Fitted**

Key Features

- **Premium Material:** Constructed from polished 304 stainless steel (S/S).
- **Inner Tube of Pre-Rinse Hose:** Santoprene rubber with S/S Braid cover and another Protective outer S/S Spiral Sheath.
- **Watermarked PR HOSE:** Separately Tested & passed to AS4020 & AS3499.
- **Safety & Convenience:** Squeeze lever with lock-on and quick-release shut-off (OH&S feature).
- **Riser Sub-Assembly:** Made & tested in our Brisbane Factory.
- **Wall Bracket:** Was Designed & Made Specifically for Height Adjustable Sink Tables in mind.
- **Soft Spray Tip:** From End-User feed-back we redesigned & made this current **Soft Spray Tip** specifically for minimizing the **Atomization of over spray** to the lowest amount possible.
- **Food Prep:** This Spray Tip can also be used in Food preparation areas to avoid bruising.
- **Interchangeable tips:** Other types of tips are available – see back page.

Warranty

- **Commercial Use:** 36 months

Technical: -

Australian Standards
"LEAD FREE"

: **Watermarked
Lic. 23008**

WELS Reg. No.

TM41431

1sts Outlet

Spray Gun – Flat Fan Tip

WELS Rated

: **6 Stars**

Flow Rate

: **4.5 lpm**

Tap Mounting Hole

: **25mm**

Material

: **304 S/S**

Finish

: **Polished S/S**

Working Press.

: **500kpa. (NPC)**

Max. Press. rate

: **1500kpa.**

Tap Operating Temp

: **1 - 80° C.**

Global Tapware Pty Ltd


E – info.tech@globaltapware.com

P – 07 38 55 2350

P – 1300 85 25 15

W- GLOBALTAPWARE.COM.AU

Product must be installed by registered Plumber in accordance with the PCA and AS/NZS3500.

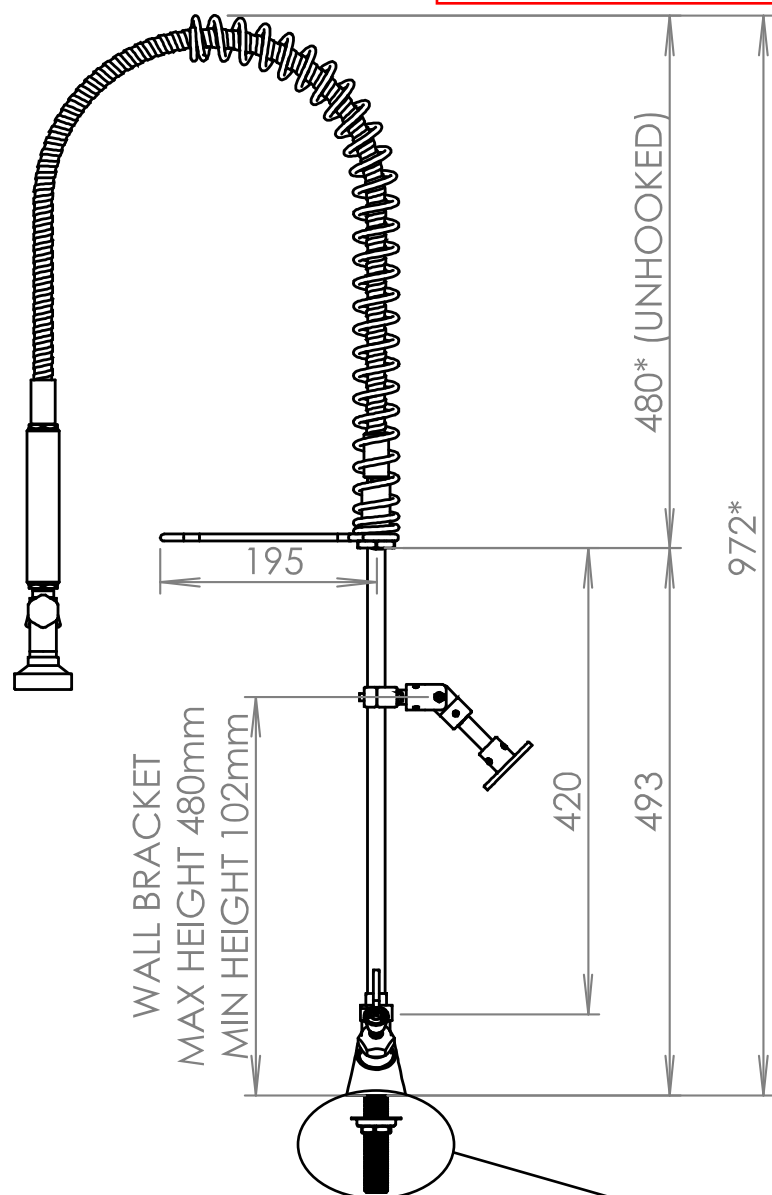

The **KNUCKLE**. Allows for a fully Adjustable Wall Bracket Mounting System



Pt. No. G83KL




Supplied only with these Pre-Rinses but sold separately for others.

Other SPRAY GUN INTERCHANGABLE SPRAY TIPS

Other Spray Tip
Supplied
FLAT FAN



Other Spray Tip
Supplied
SHOWER

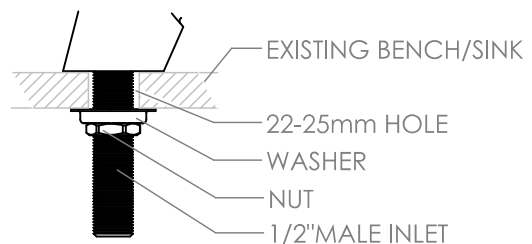

Pt. No. - **GF022100-TMV**

Available Now

The KNUCKLE. Allows Adjustable Wall Bracket Mounting System. Sold separately. Pt. No. **G83KL**



Key Features:

- **Premium Material:** Constructed from polished 304 stainless steel (S/S).
- **Inner Tube of Pre-Rinse Hose:** Santoprene rubber with S/S Braid cover and another S/S Spiral Sheath Protective outer.
- **Watermarked PR HOSE:** Separately Tested & passed to AS4020 & AS3499.
- **Safety & Convenience:** Squeeze lever with lock-on and quick-release shut-off (OH&S feature).
- **Riser Sub-Assembly:** Made & tested in our Brisbane Factory.
- **Interchangeable tips:** Other types of tips are available – see back page.
- A separate branded TMV is supplied with this unit – packed inside box.

WARRANTY:

- 36 Months for Commercial use

Technical: -

Australian Standards	: Watermarked
"LEAD FREE"	Lic. 23008
WELS Reg. No.	:TM41431
1sts Outlet	: Spray Gun
WELS Rated	: 6 Stars
Flow Rate	: 4.5 lpm
Tap Mounting Hole	: 25mm
Material	: 304 S/S
Tap Finish	: Polished S/S
TMV Finish	: CP Brass
Working Press.	: 500kpa. (NPC)
Max. Press. rate	: 1500kpa.
Tap Operating Temp	: 1 - 80° C.
TMV Op. Temp.	: Set by Plumber

Global Tapware Pty Ltd



E – info.tech@globaltapware.com

P – 07 38 55 2350

P – 1300 85 25 15

W- **GLOBALTAPWARE.COM.AU**

Product must be installed by registered Plumber in accordance with the PCA and AS/NZS3500.

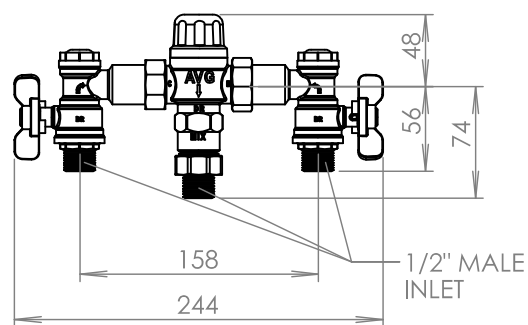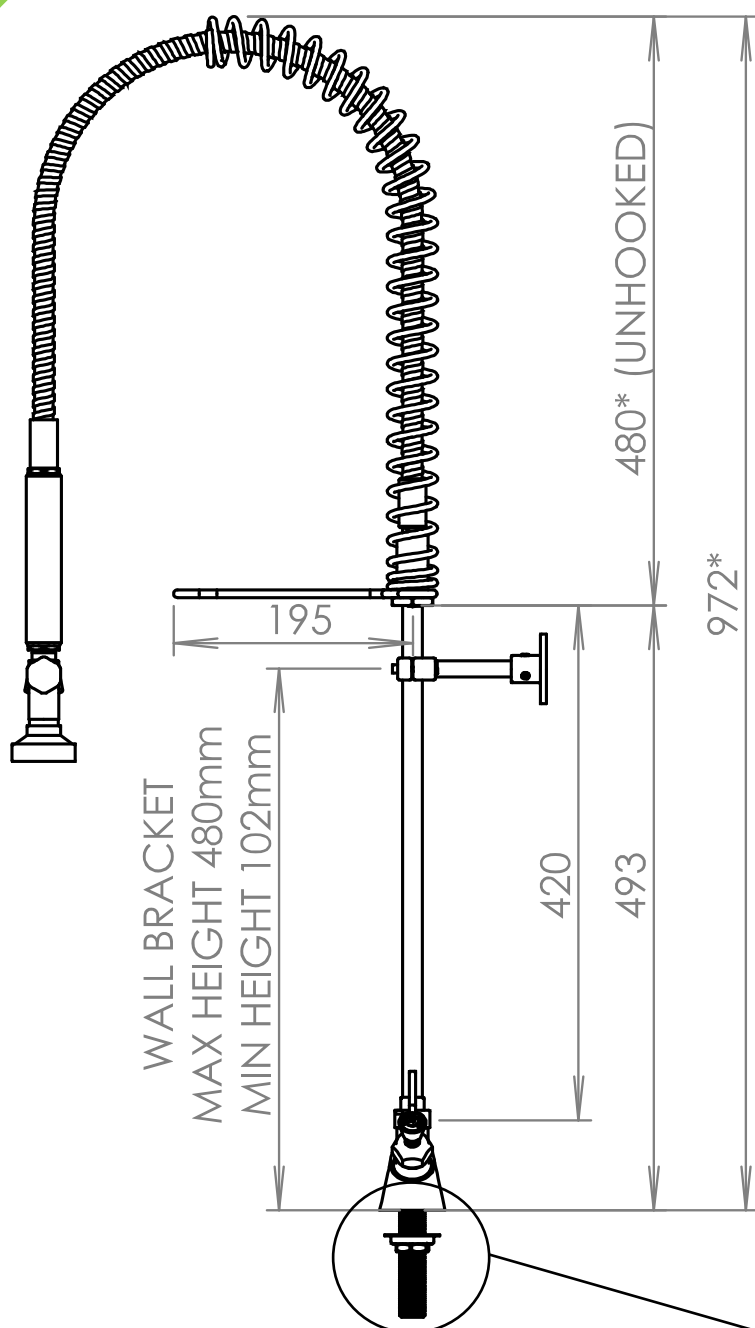


TMV DIMENSIONS

SPRAY GUN INTERCHANGABLE SPRAY TIPS

**Spray Tip
Supplied Fitted
FLAT FAN**




**Other Spray Tip
Supplied
SHOWER**

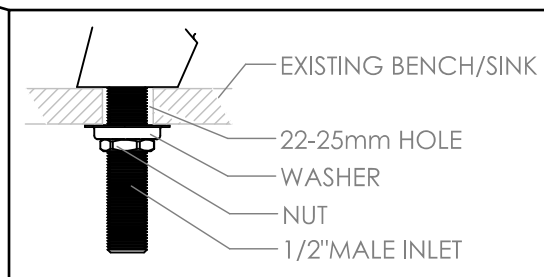

*RO Units - See Separate Brochure

SPRAY GUN INTERCHANGABLE SPRAY TIPS

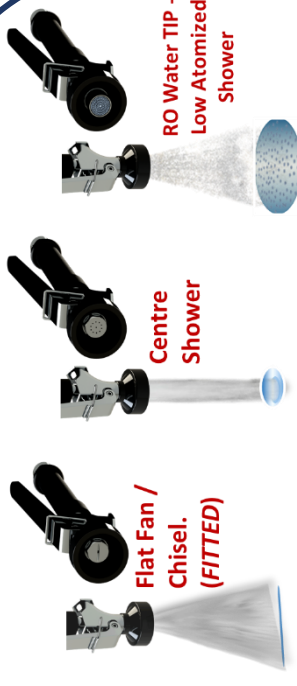


Tall

Adjustable

Midi

Cafe

NEW Height Adjustable Pre-Rinse for when shelves get in the way

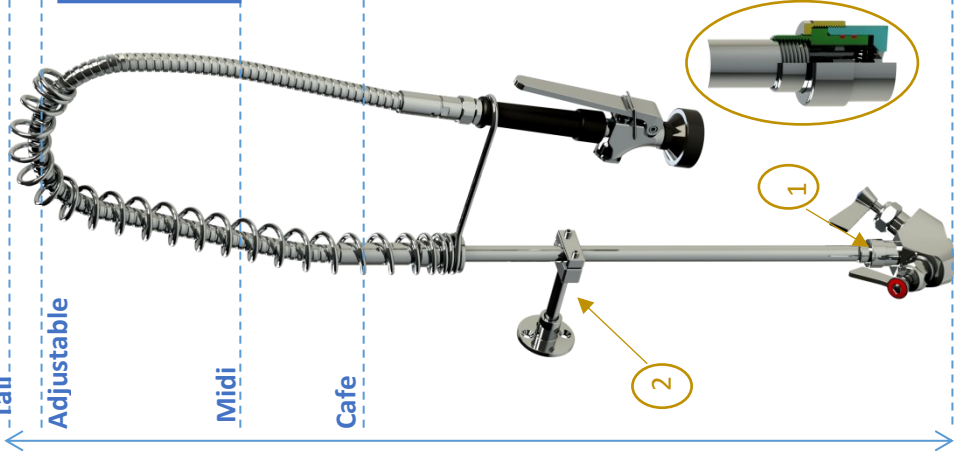

TALL

Pt. No. GF032100

TALL - Adjustable

Pt. No. GF032100-A


MIDI

Pt. No. GF032100-M



CAFE

Pt. No. GF032100-C

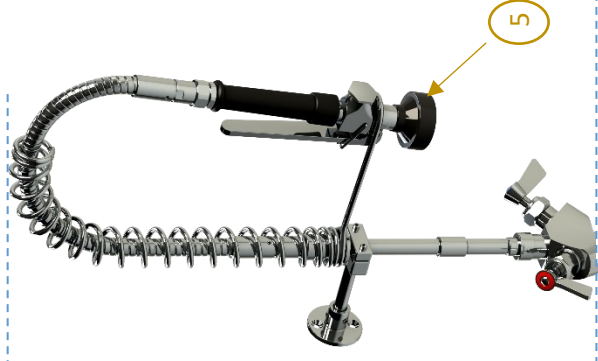

WARRANTY:
36 months
from install
date.



1. DROP N LOCK = fast assembly
2. Adjustable Wall Bracket.





3. Repair Kits AVAILABLE
4. S/S Super Tuff Armour-flex w- 1/2" fi Swivel ends

5. Australia's first Water Saving Spray Gun & still the MOST Reliable on Market.

6. Adjustable Height: The First in the World. Designed & Made in Australia by GT.


NOTE: All Spare Parts are Replaceable Nationally via Plumbing Stores

SINGLE Hole DUAL Tap Feed: – HOT & COLD

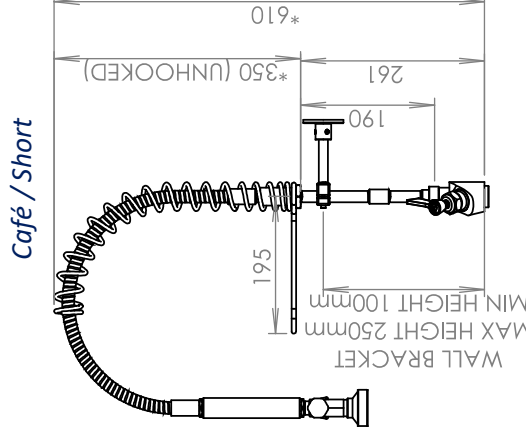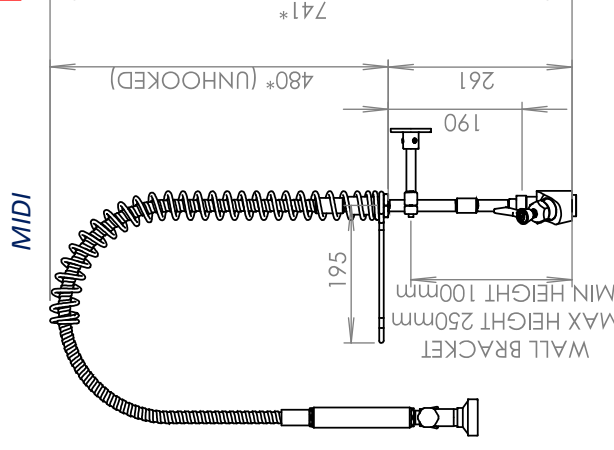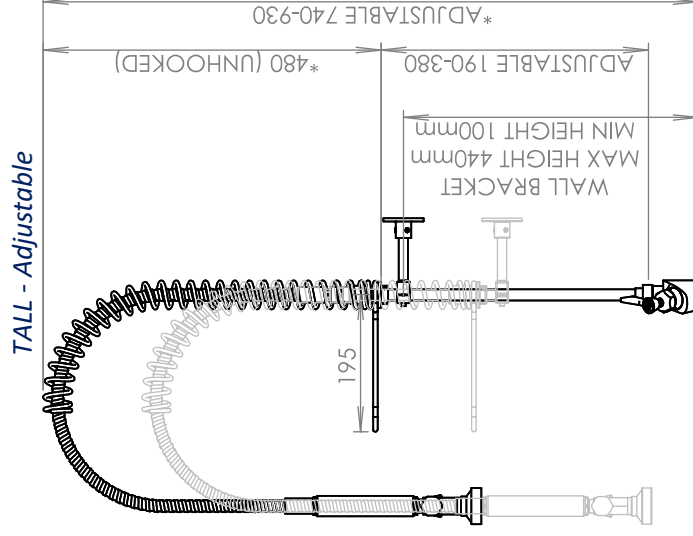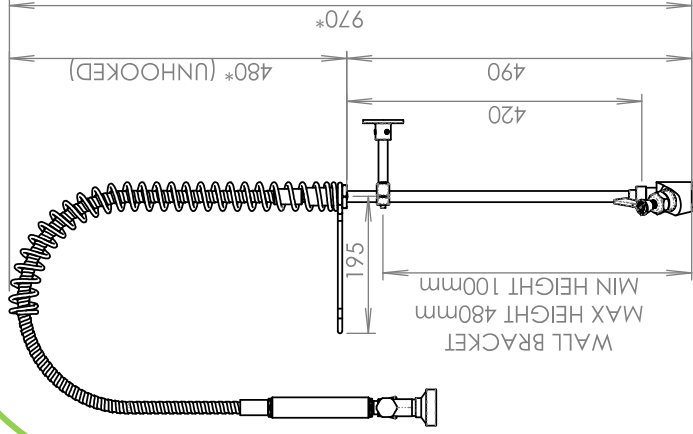


Products must be installed by registered Plumber in accordance with the PCA and AS/NZS3500.


ISOMETRIC View

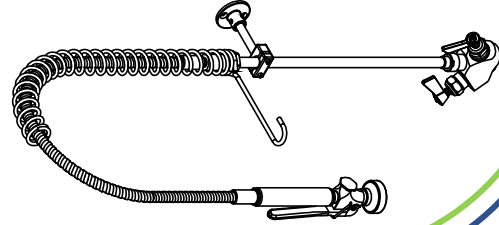


TOP View

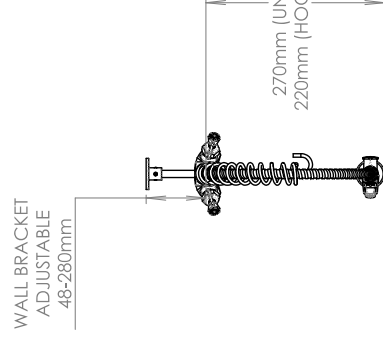

FRONT View

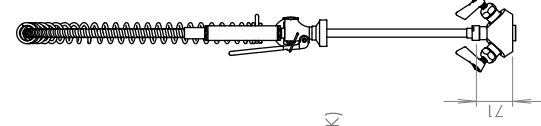

MOUNT View

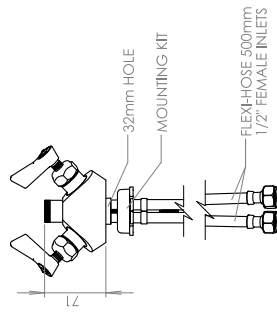

"KNUCKLE" -Sold separately. Pt. no. G83KL

Supplied with all 'RO' Units only. The "Knuckle" allows for variable angles of secure fastening of the pre-rinses to wall.

Technical: -

Aust. Standards. "LEAD FREE"

: Watermarked Lic. 23008

WELS Reg. No. 1sts Outlet Spray Gun: WELS Rated Flow Rate

: T45517 (26.8.25)

: 6 Stars
: 4.5 lpm

Mounting Hole All Metal Material Working Press. Max. Press. Rate Operating Temp
: 32mm
: Polished 304 S/S
: 500kpa. (NPC)
: 1500kpa.
: 1 - 65° C.

Inlet Hoses specify this temperature

Pt. No. - **GF032100-SS**

The '**KNUCKLE**' Allows Adjustable Wall Bracketing. Supplied w- RO PR taps for height adjustable sinks.



**LOW
ATOMIZED
Spray Tip Fitted**

Key Features

- **Premium Material:** Constructed from polished 304 stainless steel (S/S).
- **Inner Tube of Pre-Rinse Hose:** Santoprene rubber with S/S Braid cover and another Protective outer S/S Spiral Sheath.
- **Watermarked PR HOSE:** Separately Tested & passed to AS4020 & AS3499.
- **Safety & Convenience:** Squeeze lever with lock-on and quick-release shut-off (OH&S feature).
- **Riser Sub-Assembly:** Made & tested in our Brisbane Factory.
- **Wall Bracket:** Was Designed & Made Specifically for Height Adjustable Sink Tables in mind.
- **Soft Spray Tip:** From End-User feed-back we Redesigned & made this current **Soft Spray Tip** specifically for minimizing the **Atomization of over spray** to the lowest amount possible.
- **Food Prep:** This Spray Tip can also be used in Food preparation areas to avoid bruising.
- **Interchangeable tips:** Other types of tips are available – see back page.

Warranty

- **Commercial Use:** 36 months

Technical: -

Australian Standards
"LEAD FREE"

: **Watermarked
Lic. 23008**

WELS Reg. No.

T14468

1sts Outlet

Spray Gun – Flat Fan Tip

WELS Rated

: **6 Stars**

Flow Rate

: **4.5 lpm**

Tap Mounting Hole

: **32mm**

Material

: **304 S/S**

Finish

: **Polished S/S**

Working Press.

: **500kpa. (NPC)**

Max. Press. rate

: **1500kpa.**

Tap Operating Temp

: **1 - 65° C.**

Global Tapware Pty Ltd

E – info.tech@globaltapware.com

P – 07 38 55 2350

P – 1300 85 25 15

W- GLOBALTAPWARE.COM.AU


Product must be installed by registered Plumber in accordance with the PCA and AS/NZS3500.

The **KNUCKLE**. Allows for a fully Adjustable Wall Bracket Mounting System



Pt. No. G83KL

Supplied only with these Pre-Rinses but sold separately for others.

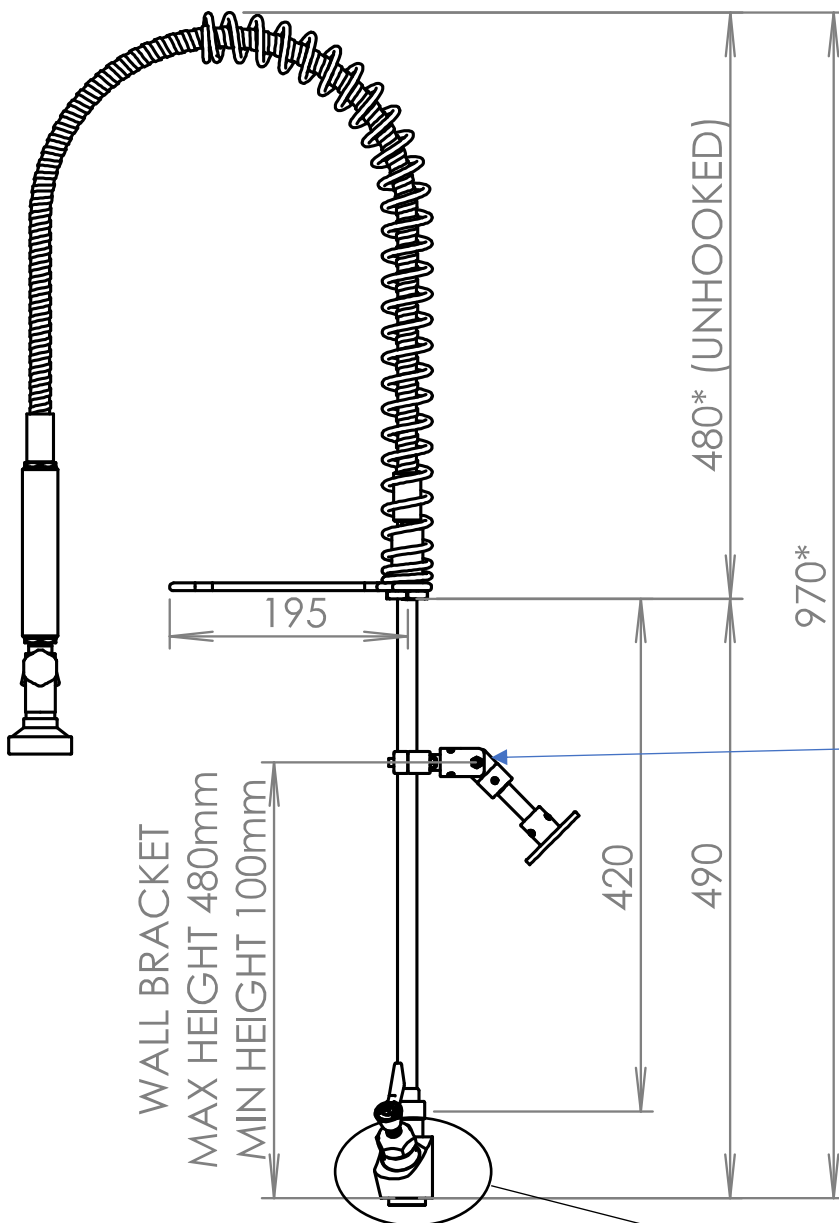


Other SPRAY GUN INTERCHANGABLE SPRAY TIPS

Other Spray Tip
Supplied
FLAT FAN




Other Spray Tip
Supplied
SHOWER

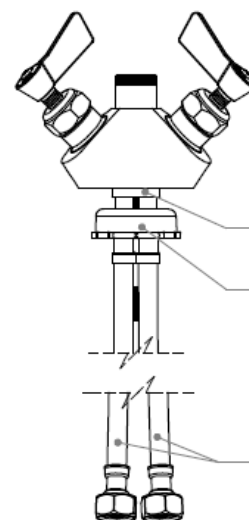

32mm HOLE

MOUNTING KIT

FLEXI-HOSE 500mm
1/2" FEMALE INLETS

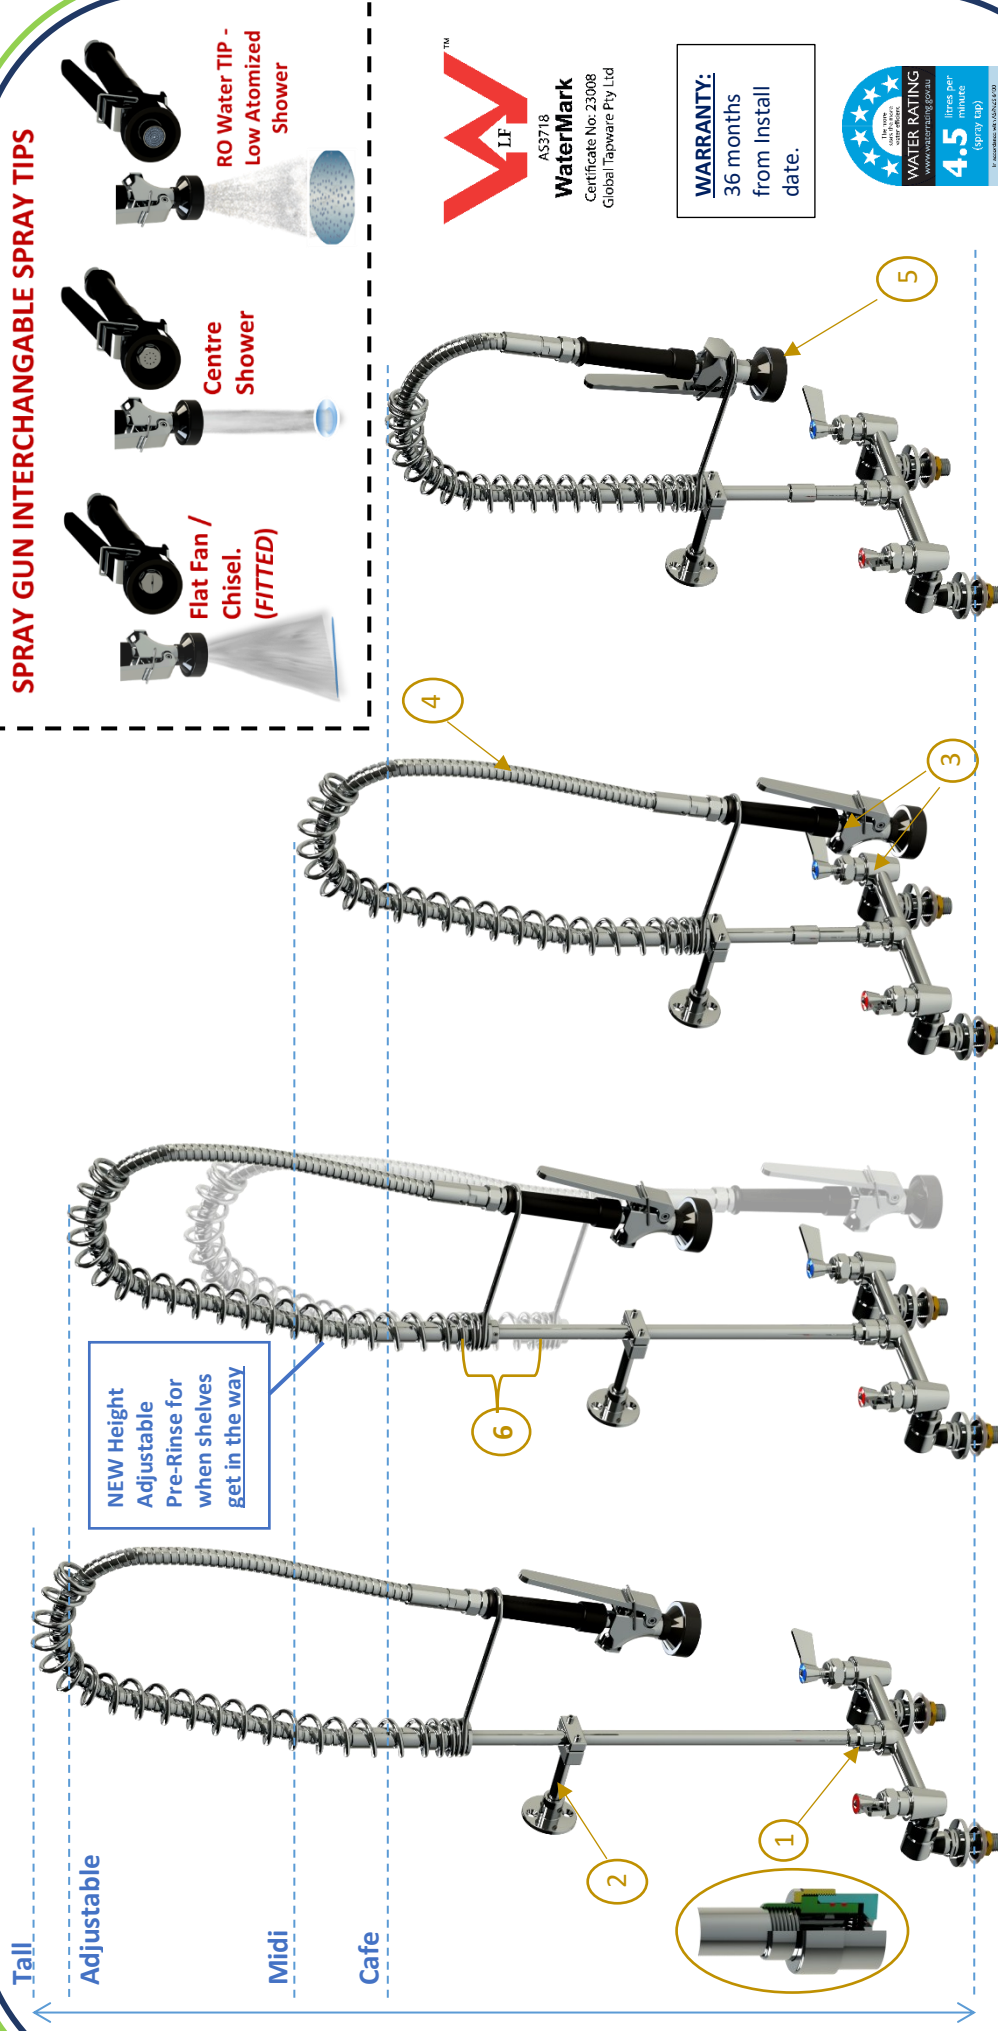

1. DROP N LOCK = fast assembly

2. Adjustable Wall Bracket.

3. Repair Kits AVAILABLE

4. S/S Super Tuff Armour-flex w- 1/2" fi Swivel ends





5. Australia's first Water Saving Spray Gun & still the MOST Reliable on Market.

6. Adjustable Spring Retainer. The First in the World. Designed & Made in Australia by GT.

NOTE: All Parts are Replaceable Nationally via Plumbing Stores


FIXED EXPOSED BREACH Tap. Feed Lines = HOT & COLD

TALL - Adjustable

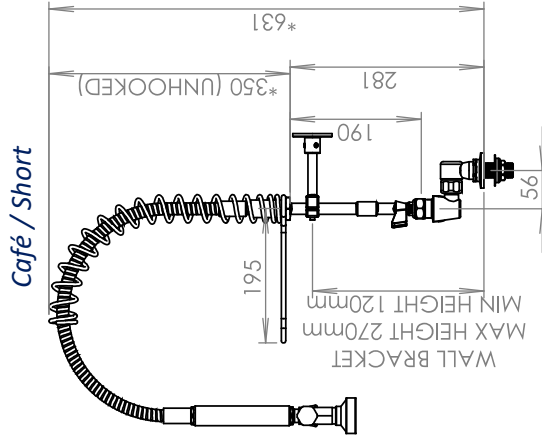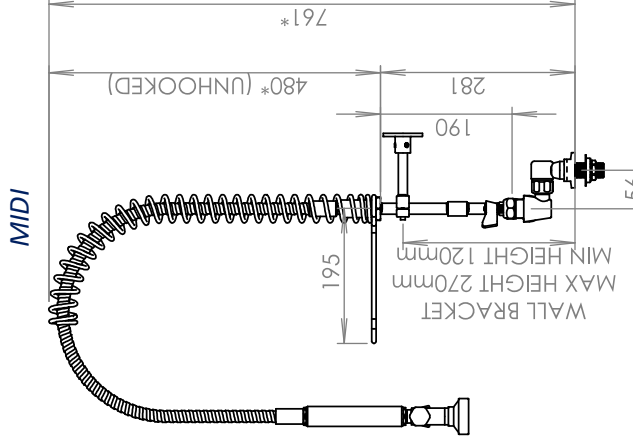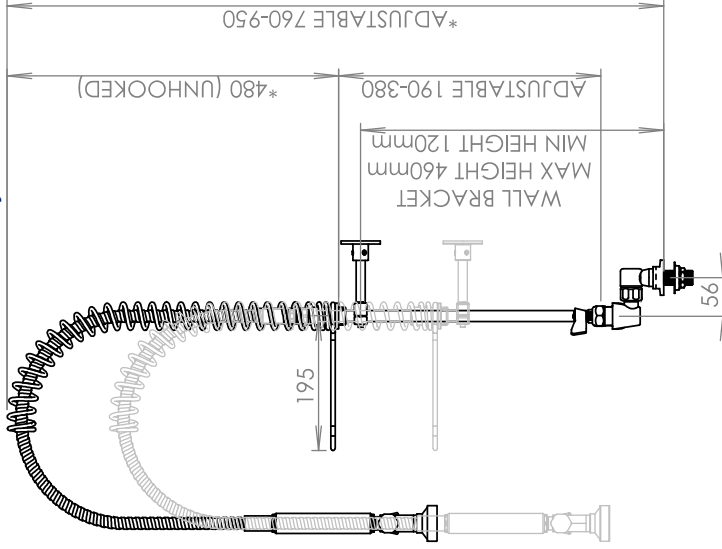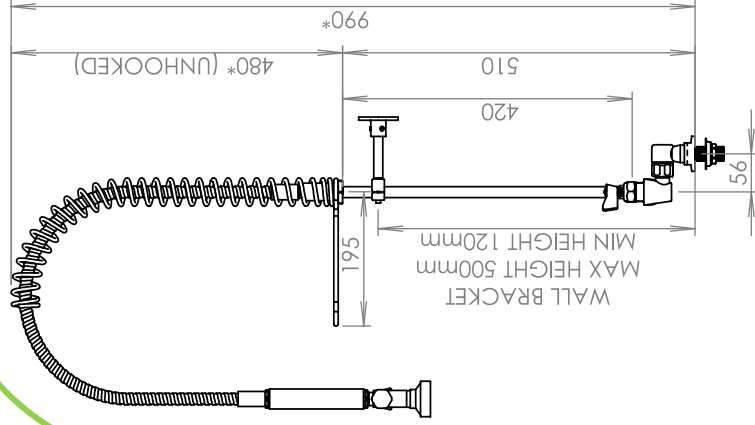


Products must be installed by registered Plumber in accordance with the PCA and AS/NZS3500.


ISOMETRIC View

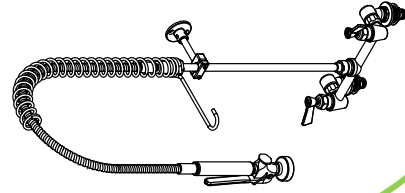

TOP View

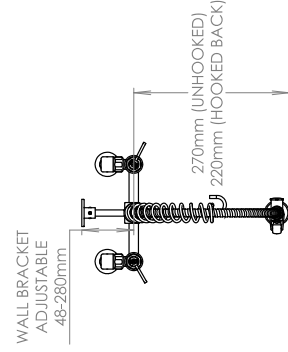

FRONT View

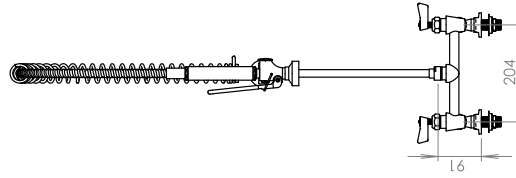


"KNUCKLE" - Sold separately. Pt. no. G83KL

Supplied with all "RO" Units only. The "Knuckle" allows for variable angles of secure fastening of the pre-rinses to wall.



MOUNT View

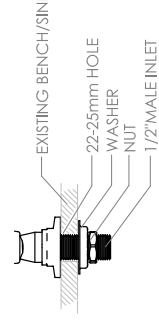

Technical: -

Aust. Standards. "LEAD FREE"

: Watermarked Lic. 23008

: TM41495

WELS Reg. No.

1sts Outlet Spray Gun:

WELS Rated

Flow Rate

: 6 Stars

: 4.5 lpm

: 25mm

: Polished 304 S/S

: 500kpa. (NPC)

: 1500kpa.

: 1 - 80° C.


Mounting Hole

All Metal Material

Working Press.

Max. Press. Rate

Operating Temp


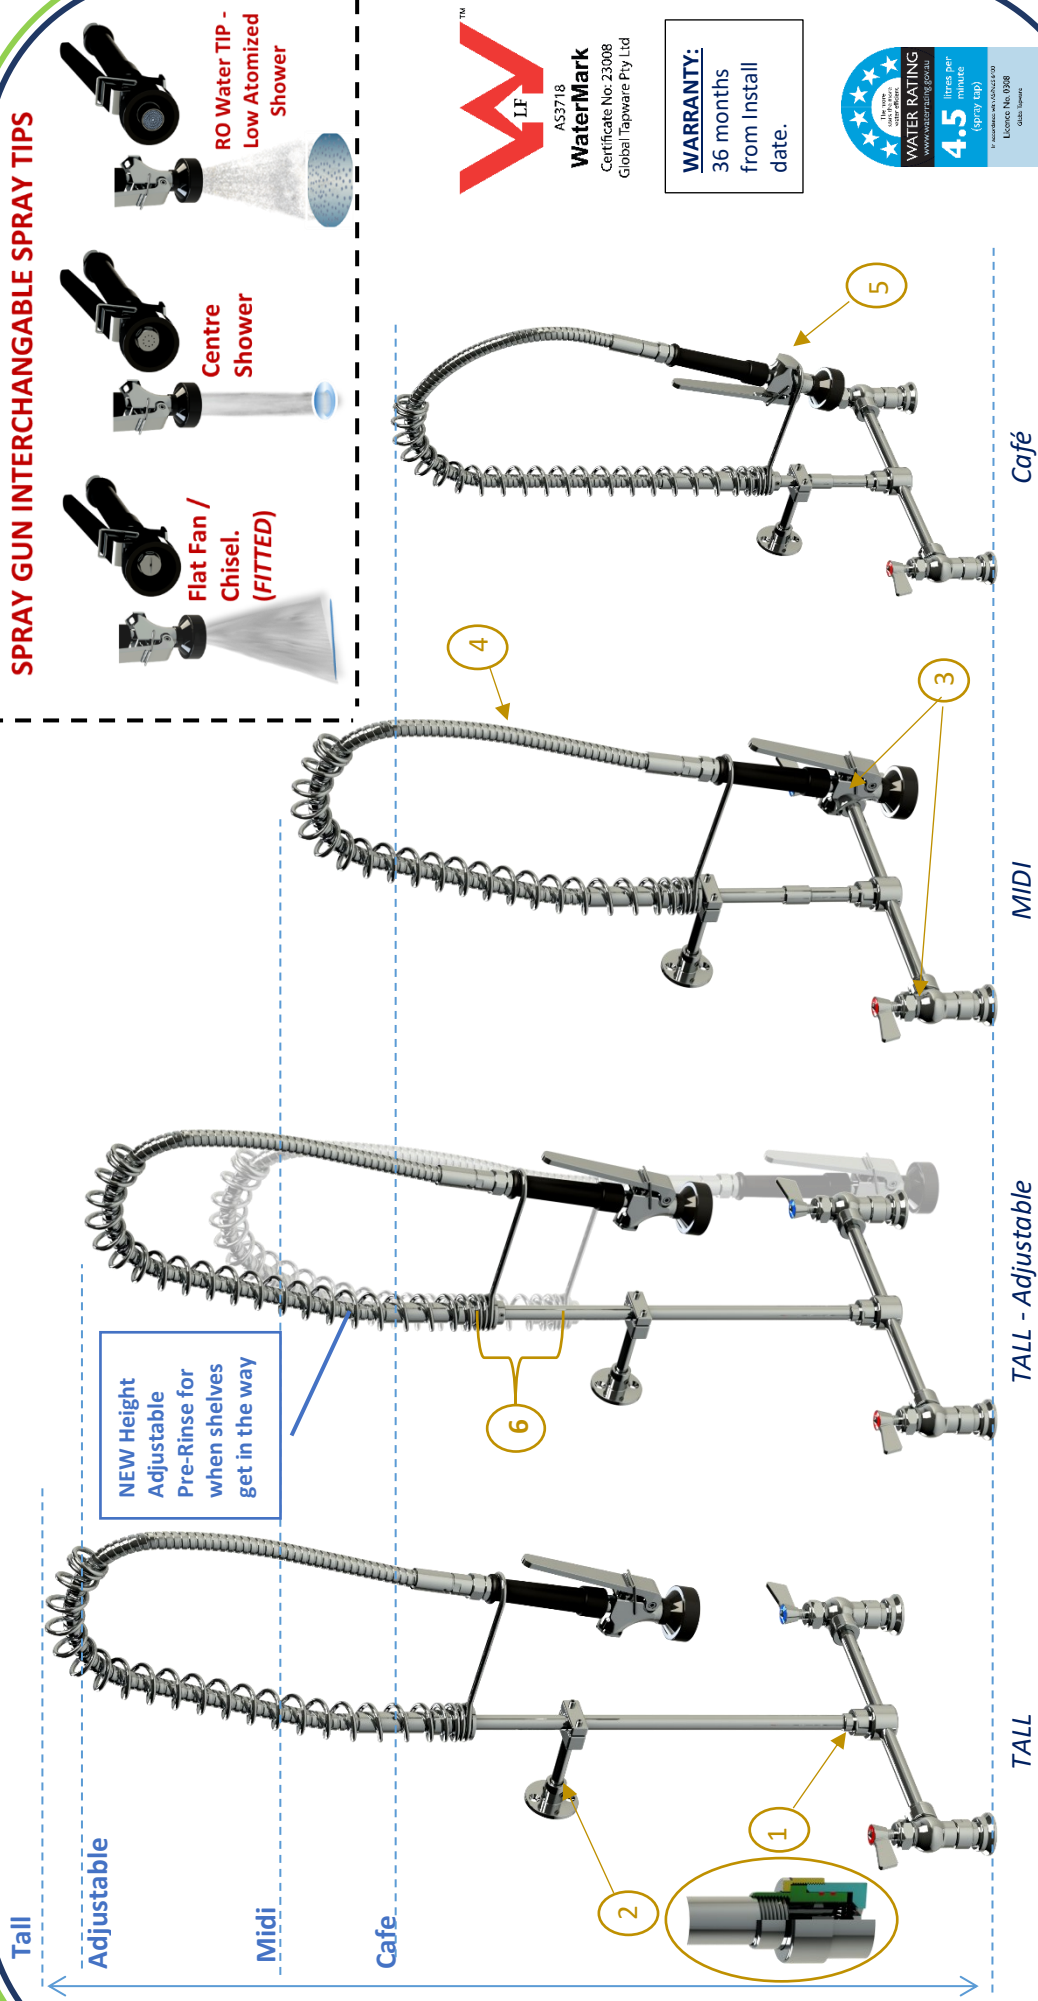


1. DROP N LOCK = fast assembly
2. Adjustable Wall Bracket.
3. Repair Kits AVAILABLE
4. S/S Super Tuff Armour-flex w- 1/2" fi Swivel ends
5. Australia's first Water Saving Spray Gun & still the MOST Reliable on Market.
6. Adjustable Spring Retainer. The First in the World. Designed & Made in Australia by GT.


NOTE: All Parts are Replaceable Nationally via Plumbing Stores

ADJ. EXPOSED BREACH Hob tap Feed Lines = HOT & COLD


TALL - Adjustable

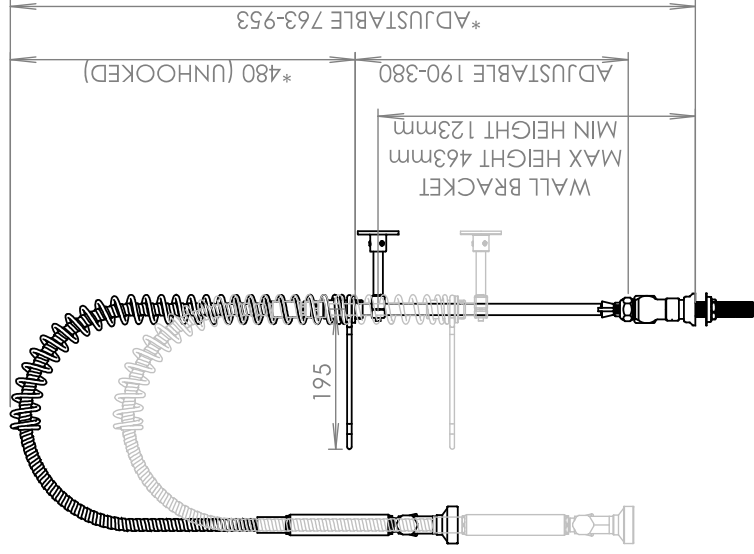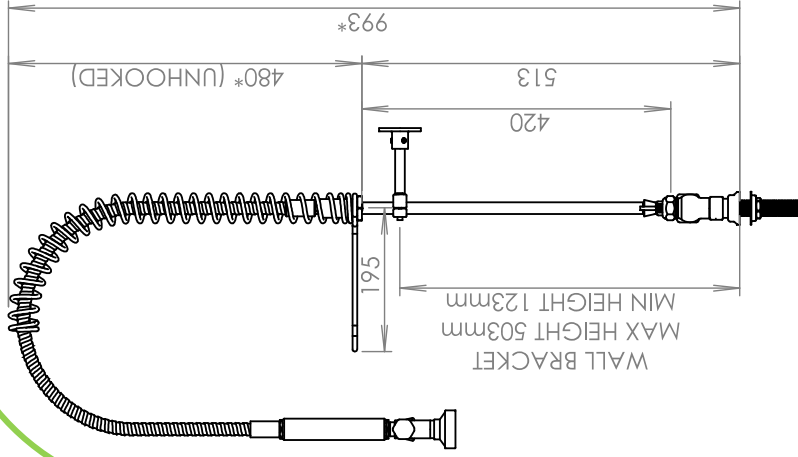

MIDI

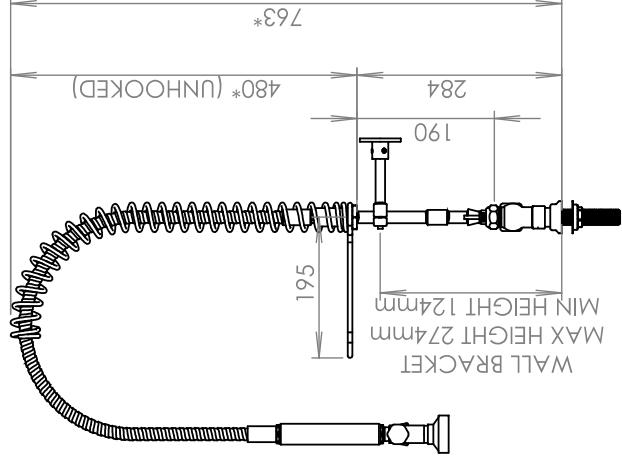


Café / Short

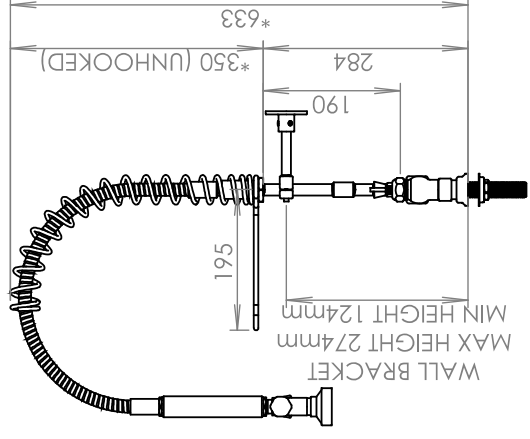


Products must be installed by registered Plumber in accordance with the PCA and AS/NZS3500.


ISOMETRIC View

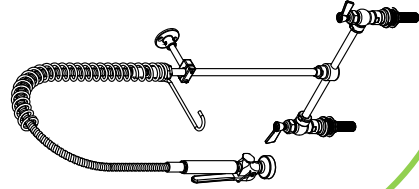

TOP View

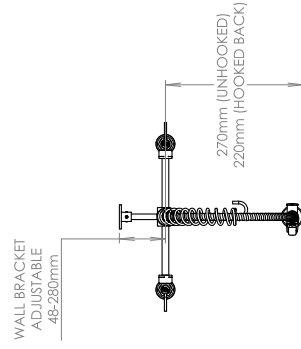

FRONT View

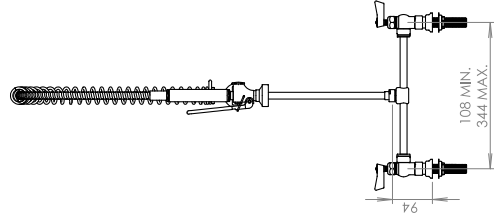


"KNUCKLE" -Sold separately. Pt. no. G83KL

Supplied with all 'RO' Units only. The "Knuckle" allows for variable angles of secure fastening of the pre-rinses to wall.



MOUNT View

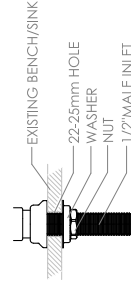

Technical: -

Aust. Standards. "LEAD FREE"

: Watermarked Lic. 23008

WELS Reg. No.

1sts Outlet Spray Gun:

WELS Rated

Flow Rate

: 6 Stars

: 4.5 lpm

: 25mm x 2

: Polished 304 S/S

: 500kpa. (NPC)

: 1500kpa.

: 1 - 80° C.

Mounting Hole

All Metal Material

Working Press.

Max. Press. Rate

Operating Temp



'Global Fisher™' GLOBAL HOB Outlet Only Pre-Rinse – STANDARD

TAPWARE

Global Tapware Pty Ltd
E – info.tech@globaltapware.com
P – 07 38 55 2350
P – 1300 85 25 15
W- GLOBALTAPWARE.COM.AU

Made from 304 STAINLESS STEEL = Lead Free (LF)

Tall

Adjustable

Midi

Cafe

NEW Height Adjustable Pre-Rinse for when shelves get in the way

SPRAY GUN INTERCHANGABLE SPRAY TIPS

Flat Fan / Chisel. (FITTED)

Centre Shower

RO Water TIP - Low Atomized Shower

WaterMark
AS3718
Certificate No: 23008
Global Tapware Pty Ltd

WARRANTY:
36 months from install date.

WATER RATING
4.5 litres per minute (spray up)

1

2

3

4

5

6

TALL
Pt. No. GF062100

TALL - Adjustable
Pt. No. GF062100-A

MIDI
Pt. No. GF062100-M

Cafe
Pt. No. GF062100-C

1. DROP N LOCK = fast assembly

2. Adjustable Wall Bracket.

3. Repair Kits AVAILABLE

4. S/S Super Tuff Armour-flex w- 1/2" fi Swivel ends


5. Australia's first Water Saving Spray Gun & still the MOST Reliable on Market.

6. Adjustable Spring Retainer. The First in the World. Designed & Made in Australia by GT.


NOTE: All Parts are Replaceable Nationally via Plumbing Stores

Hob Outlet (no tap). Feed Lines= HOT or COLD or MIXED


TALL

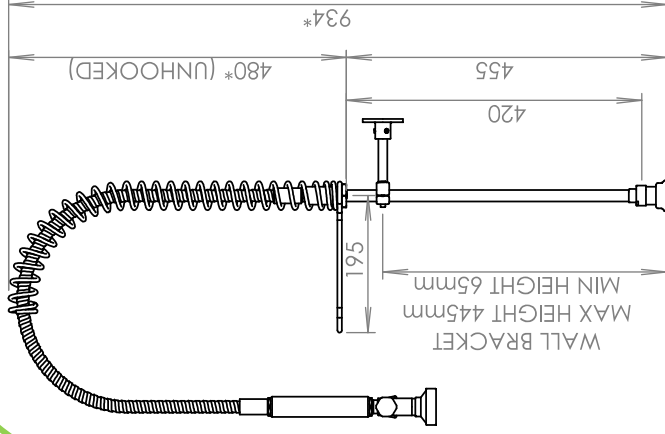


TALL - Adjustable

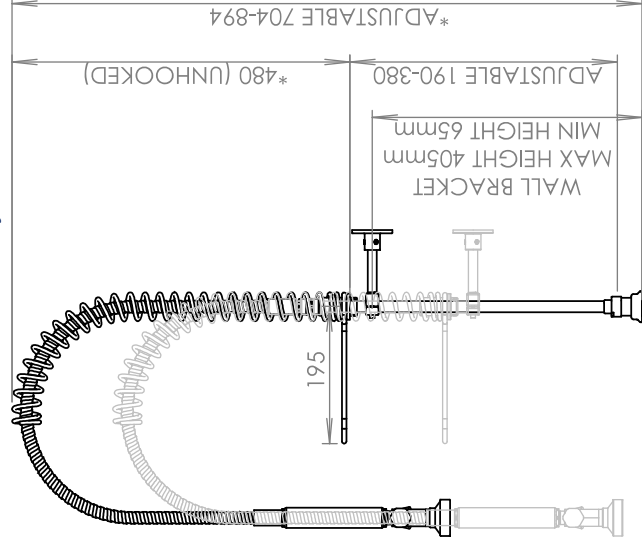

MIDI

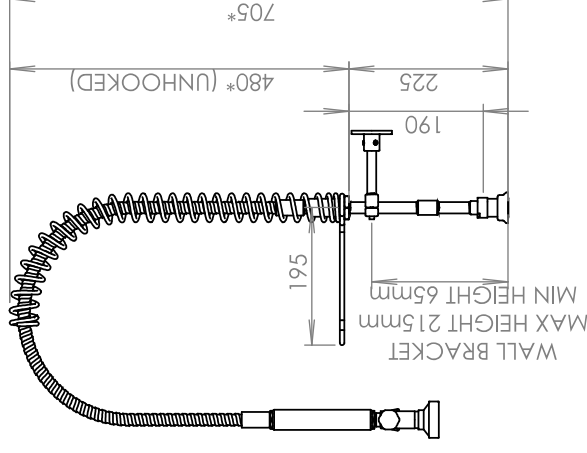


Café / Short

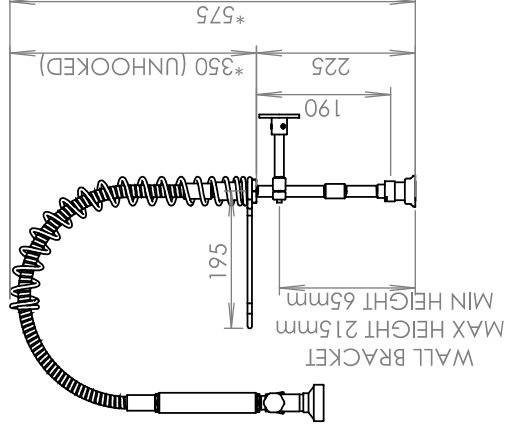


Products must be installed by registered Plumber in accordance with the PCA and AS/NZS3500.


ISOMETRIC View

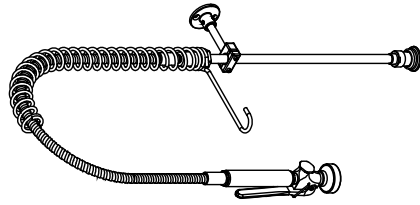

TOP View

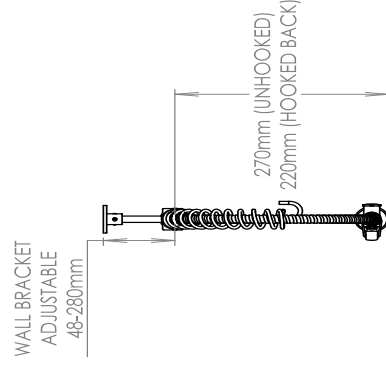

FRONT View

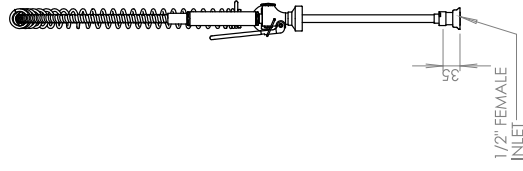


"KNUCKLE" -Sold separately. Pt. no. G83KL

Supplied with all 'RO' Units only. The "Knuckle" allows for variable angles of secure fastening of the pre-rinses to wall.



MOUNT View

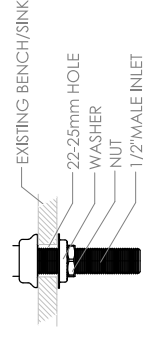

Technical: -

Aust. Standards.
LEAD FREE

: Watermarked
Lic. 23008

: TM41494

: 6 Stars

: 4.5 lpm

: 9 lpm

: 25mm

: Polished 304 S/S

: 500kpa. (NPC)

: 1500kpa.

: 1 - 80° C.

WELS Reg. No.

1sts Outlet Spray Gun:

WELS Rated

Flow Rate

2nd Outlet – SPOUT

Mounting Hole

All Metal Material

Working Press.

Max. Press. Rate

Operating Temp




'Global Fisher™'

G- GLOBAL Exposed Adjustable Breach Hob Pre-Rinse - STANDARD

TAPWARE

Global Tapware Pty Ltd
E – info.tech@globaltapware.com
P – 07 38 55 2350
P – 1300 85 25 15
W- GLOBALTAPWARE.COM.AU

Made from 304 **STAINLESS STEEL** = Lead Free (LF)

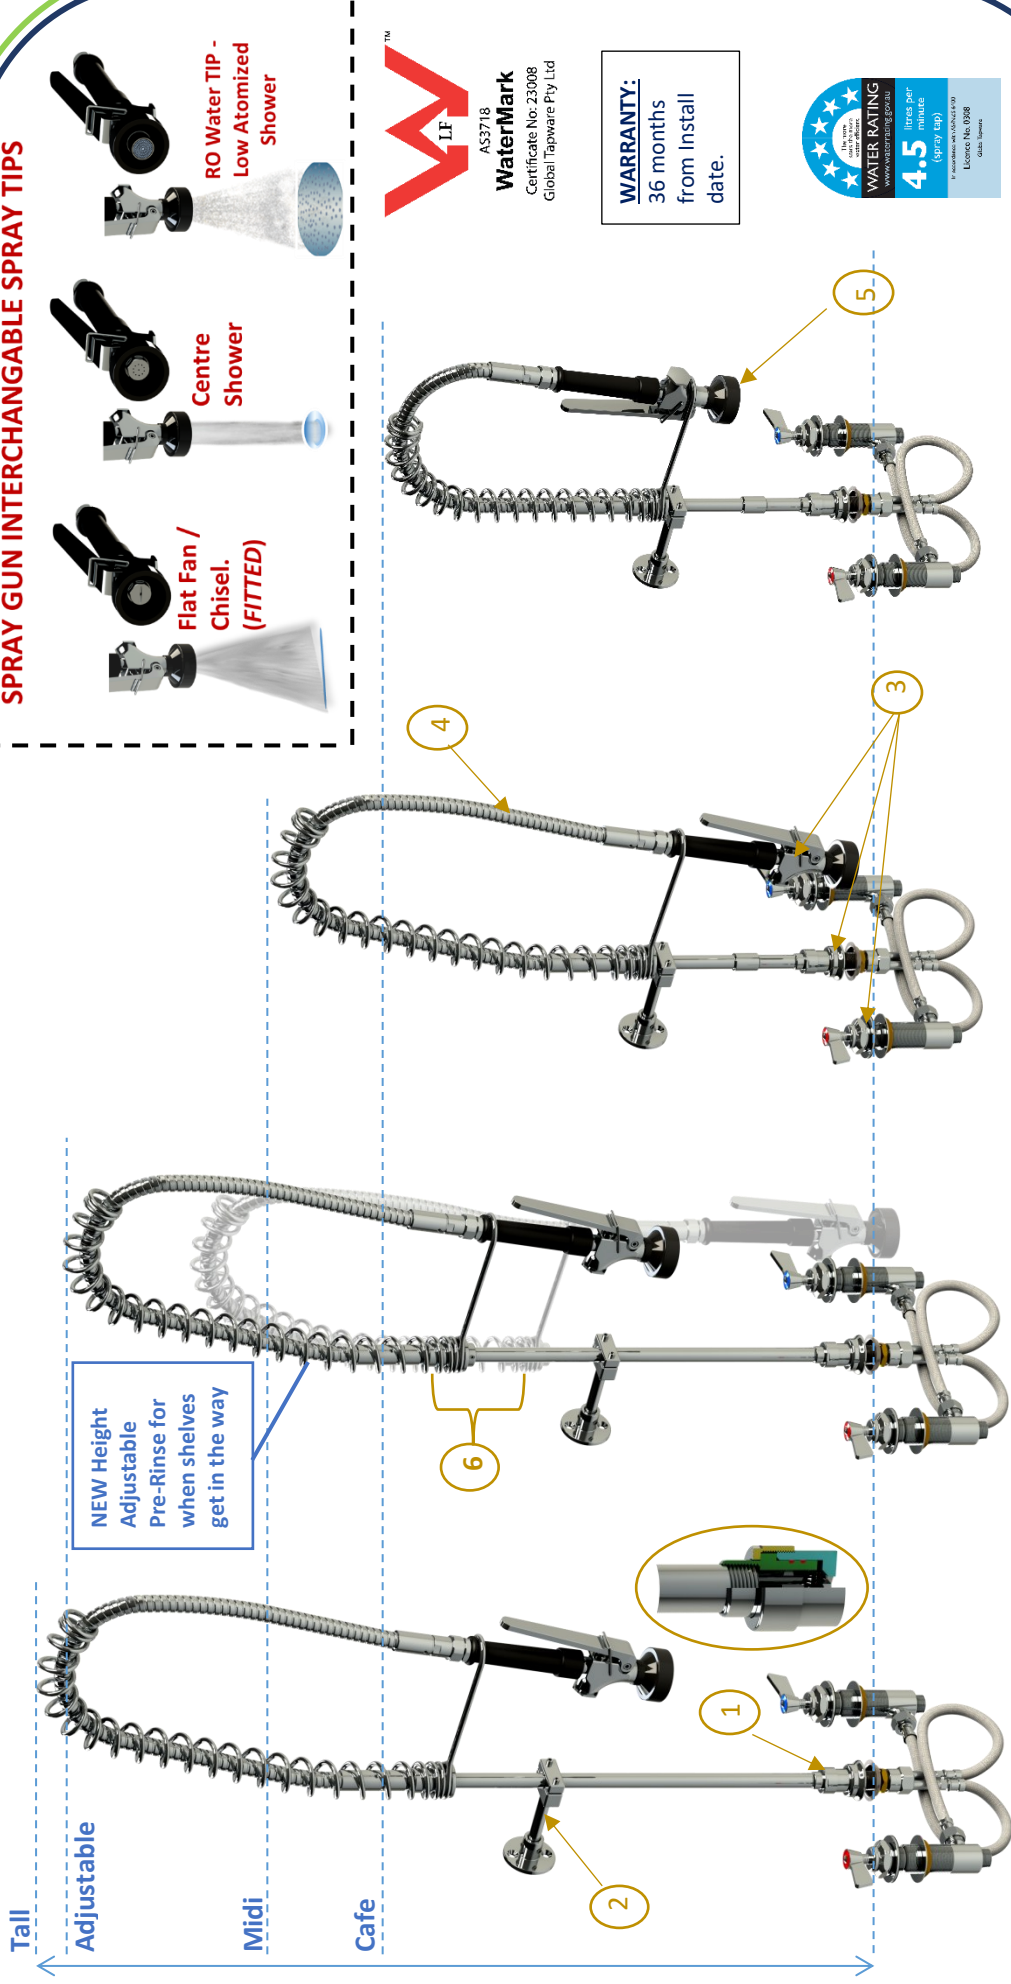

TALL

Pt. No. GF072100

TALL - Adjustable

Pt. No. GF072100-A

MIDI

Pt. No. GF072100-M

Café

Pt. No. GF072100-C



1. DROP N LOCK = fast assembly
2. Adjustable Wall Bracket.
3. Repair Kits AVAILABLE
4. S/S Super Tuff Armour-flex w- 1/2" fi Swivel ends
5. Australia's first Water Saving Spray Gun & still the MOST Reliable on Market.
6. Adjustable *Spring Retainer*. The First in the World. Designed & Made in Australia

NOTE: All Parts are Replaceable Nationally via Plumbing Stores


Hidden, Adjustable Breach, Hob Tap. Feed Lines - HOT & COLD

TALL


TALL - Adjustable

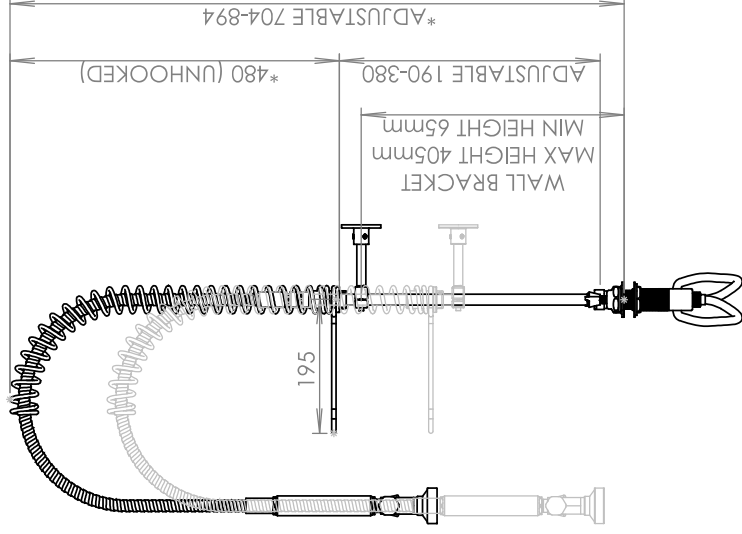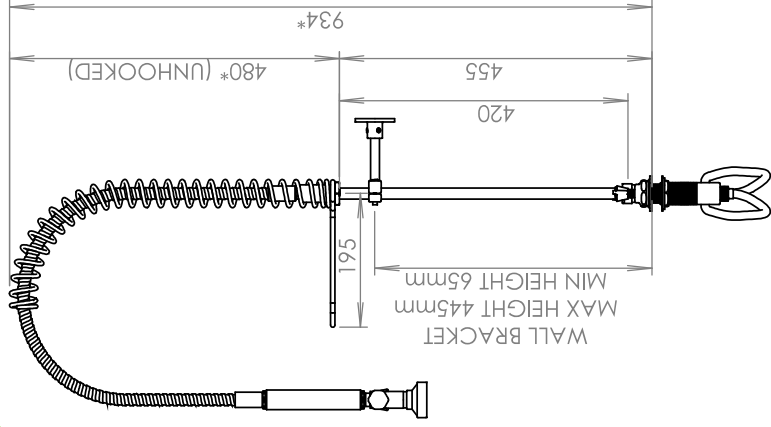

MIDI

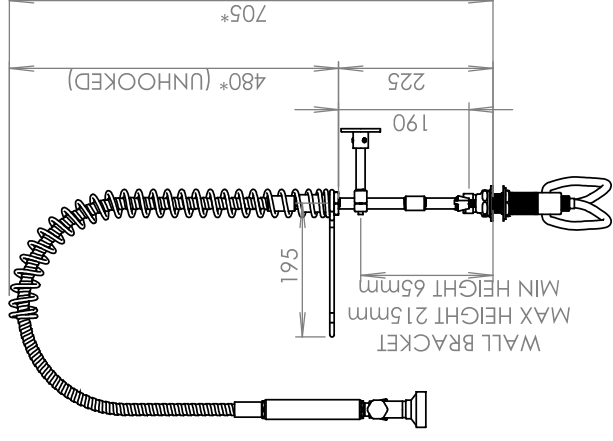


Café / Short

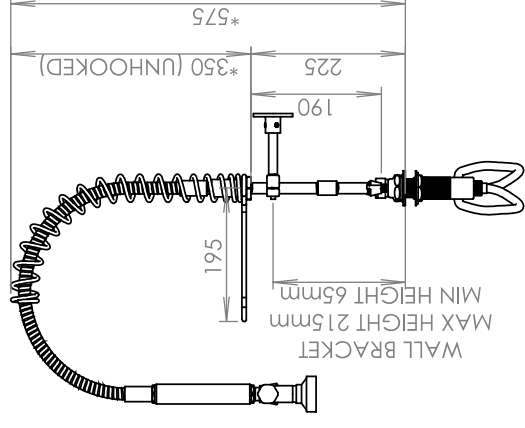


Products must be installed by registered Plumber in accordance with the PCA and AS/NZS3500.


ISOMETRIC View

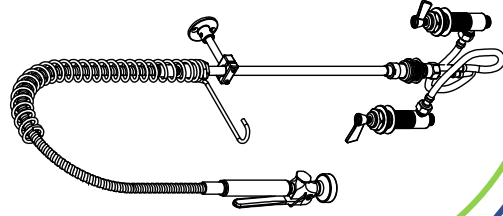

TOP View

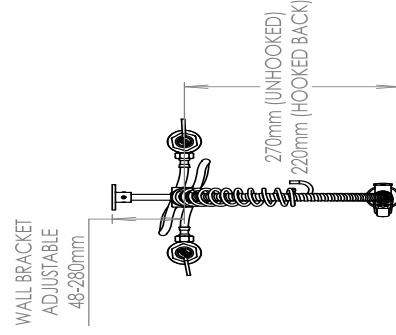

FRONT View

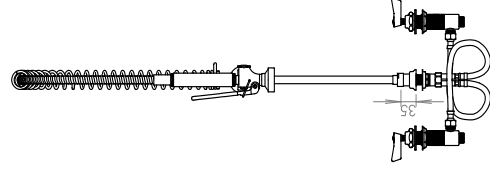


"KNUCKLE" -Sold separately. Pt. no. G83KL

Supplied with all 'RO' Units only. The "Knuckle" allows for variable angles of secure fastening of the pre-rinses to wall.



MOUNT View

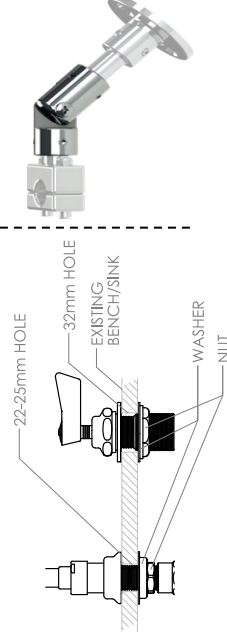

Technical: -
Aust. Standards.
"LEAD FREE"

: Watermarked
Lic. 23008

WELS Reg. No.
1sts Outlet Spray Gun:
WELS Rated
Flow Rate

: TM41494

: 6 Stars
:4.5 lpm

: 25mm
: Polished 304 S/S
: 500kpa. (NPC)
: 1500kpa.
: 1 - 80° C.

Mounting Hole
All Metal Material
Working Press.
Max. Press. Rate
Operating Temp



GLOBAL TAPWARE

Manufacturers of Quality Commercial Tapware



WWW.GLOBALTAPWARE.COM.AU

P1 - 07 3855 2350

P2 – 1300 85 25 15

E – info.tech@globaltapware.com