

GLOBAL *FISHER* PRE-RINSES

- WALL MOUNT -

POT FILLER

SPOUT MODELS

BROCHURE BOOK models:

GF11, GF13, GF14, GF15, GF16

QR Code
insert



INDEX

GLOBAL FISHER brand

Technical Drawings for: **WALL Pre-Rinses POT-FILLER SPOUT**

[illegible]

Supplied with 12" /
300mm S/S Spout.

Other Spout Lengths
available – see chart


* RO Units - See Separate Brochure

NEW Height
Adjustable
Pre-Rinse for
when shelves
get in the way

SPRAY GUN INTERCHANGABLE SPRAY TIPS



WARRANTY:
36 months
from install
date.

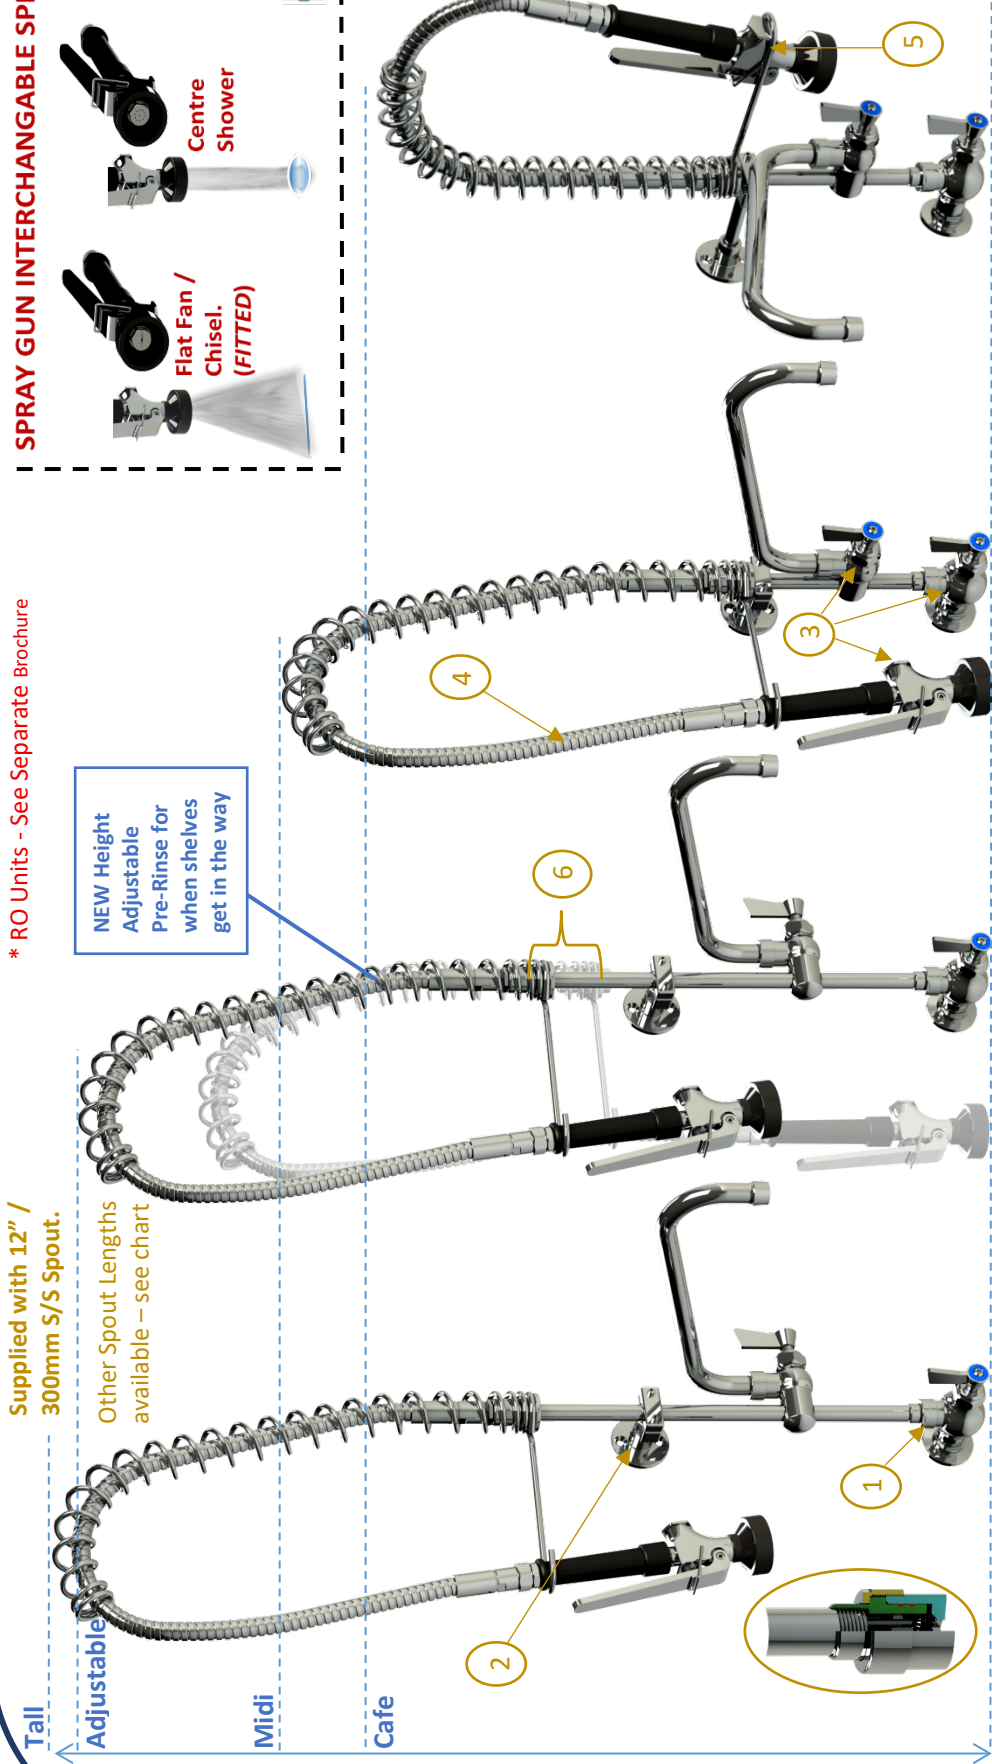

TALL

TALL - Adjustable

MIDI

Cafe

Pt. No. GF112512

Pt. No. GF112512-A

Pt. No. GF112512-M


Pt. No. GF112512-C

1. DROP N LOCK = fast assembly
2. Adjustable Wall Bracket.
3. Repair Kits AVAILABLE
4. S/S Super Tuff Armour-flex w- 1/2" fi Swivel ends
5. Australia's first Water Saving Spray Gun & still the MOST Reliable on Market.
6. Adjustable Height Spring Retainer. The First in the World. Designed & Made in Australia by GT.


NOTE: All Parts are Replaceable Nationally via Plumbing Stores

SINGLE WALL Tap Feed: – HOT or COLD


TALL

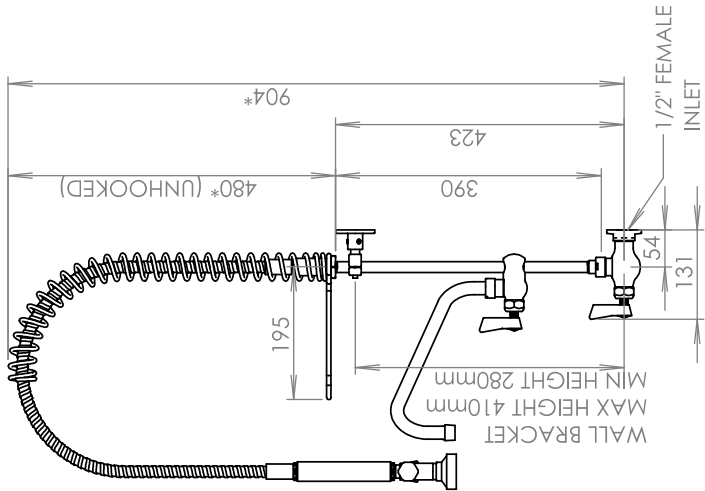


TALL - Adjustable

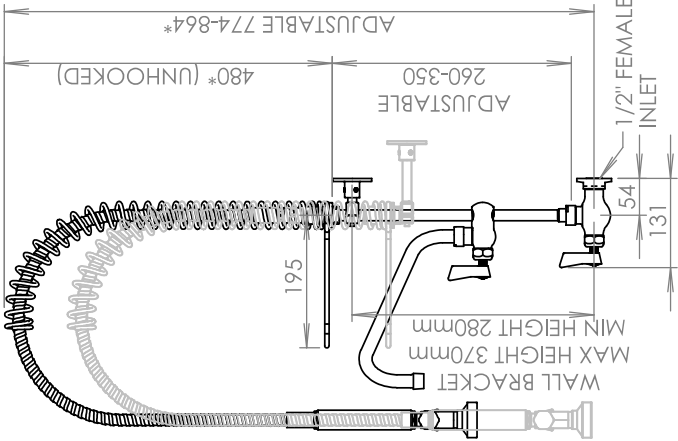

MIDI

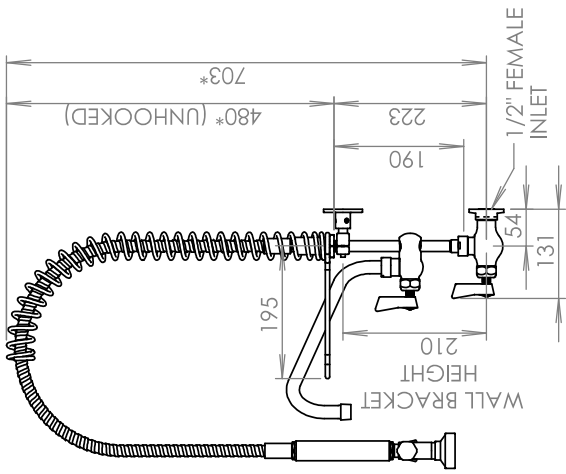


Café / Short

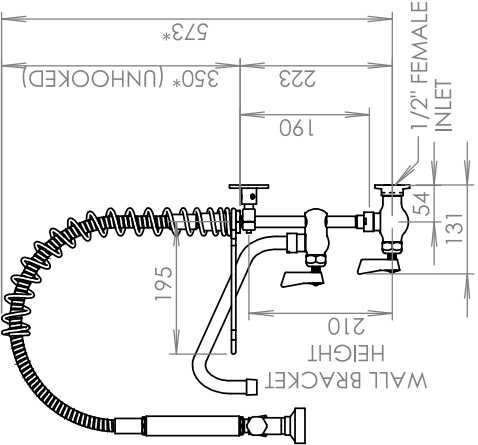


SPOUT CHART - Tall Model (applies to the other models w- suffix)		
PART No.	MODEL	Length
GF112506	6"	150mm
GF112508	8"	200mm
GF112510	10"	250mm
GF112512	12"	300mm
GF112514	14"	350mm
GF112516	16"	400mm

Products must be installed by registered Plumber in accordance with the PCA and AS/NZS3500.


ISOMETRIC View

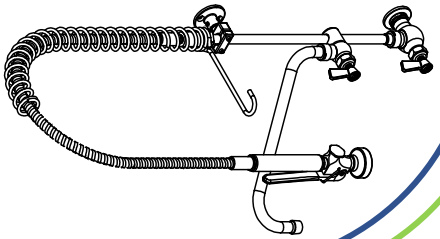

TOP View

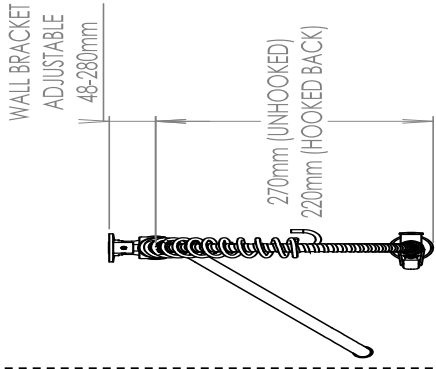

FRONT View

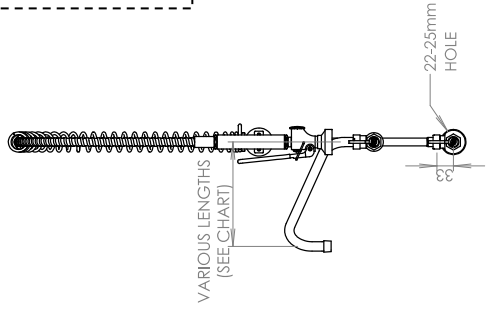

"KNUCKLE" -Sold separately. Pt. no. G83KL

Supplied with all "RO" Units only. The "Knuckle" allows for variable angles of the secure fastening of the pre-rinse to wall.



Technical: -

Aust. Standards. "LEAD FREE"

: Watermarked Lic. 23008

WELS Reg. No.

1sts Outlet Spray Gun:

WELS Rated

Flow Rate

2nd outlet Flow Rate

: TM41650

: 6 Stars

: 4.5 lpm

: 9 lpm

: 25mm

: Polished 304 S/S

: 500kpa. (NPC)

: 1500kpa.

: 1 - 80° C.

Mounting Hole

All Metal Material

Working Press.

Max. Press. Rate

Operating Temp

'Global Fisher™' Single WALL Pre-Rinses w- Pot Filler For use with RO Water & FOOD Prep

Pt. No. – **GF112512-SS**

The '**KNUCKLE**' Allows Adjustable Wall Bracketing. Supplied w- RO PR taps for height adjustable sinks.



**SHOWER
Spray Tip Supplied
Low ATOMIZATION**

Key Features

- **Premium Material:** Constructed from polished 304 stainless steel (S/S).
- **Inner Tube of Pre-Rinse Hose:** Santoprene rubber with S/S Braid cover and another Protective outer S/S Spiral Sheath.
- **Watermarked PR HOSE:** Separately Tested & passed to AS4020 & AS3499.
- **Safety & Convenience:** Squeeze lever with lock-on and quick-release shut-off (OH&S feature).
- **Riser Sub-Assembly:** Made & tested in our Brisbane Factory.
- **Wall Bracket:** Was Designed & Made Specifically for Height Adjustable Sink Tables in mind.
- **Soft Spray Tip:** From End-User feed-back we Redesigned & made this current **Soft Spray Tip** specifically for minimizing the **Atomization of over spray** to the lowest amount possible.
- **Food Prep:** This Spray Tip can also be used in Food preparation areas to avoid bruising.
- **Interchangeable tips:** Other types of tips are available – see back page.

Warranty

- **Commercial Use:** 36 months

Technical: -

Australian Standards

Lead free

WELS Reg. No.

1sts Outlet

WELS Rated

Flow Rate

2nd Outlet

WELS Rated

Flow Rate

Tap Mounting Hole

Material

Finish

Working Press.

Max. Press. rate

Tap Operating Temp

: **Watermarked
Lic. 23008**

: **TM41650**

Spray Gun – Flat Fan Tip

: **6 Stars**

: **4.5 lpm**

: **Spout**

: **3 Stars**

: **9 lpm**

: **25mm**

: **304 S/S**

: **Polished S/S**

: **500kpa. (NPC)**

: **1500kpa.**

: **1 - 65° C.**

Global Tapware Pty Ltd



E – info.tech@globaltapware.com

P – 07 38 55 2350

P – 1300 85 25 15

W- GLOBALTAPWARE.COM.AU

Product must be installed by registered Plumber in accordance with the PCA and AS/NZS3500.

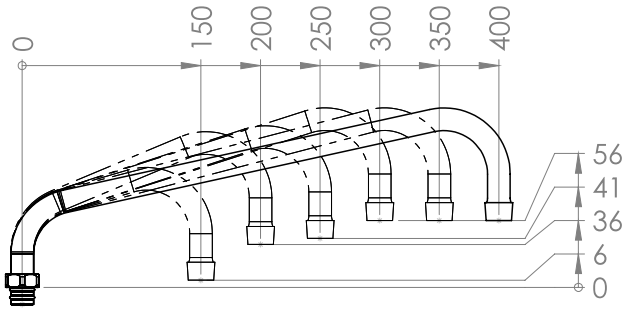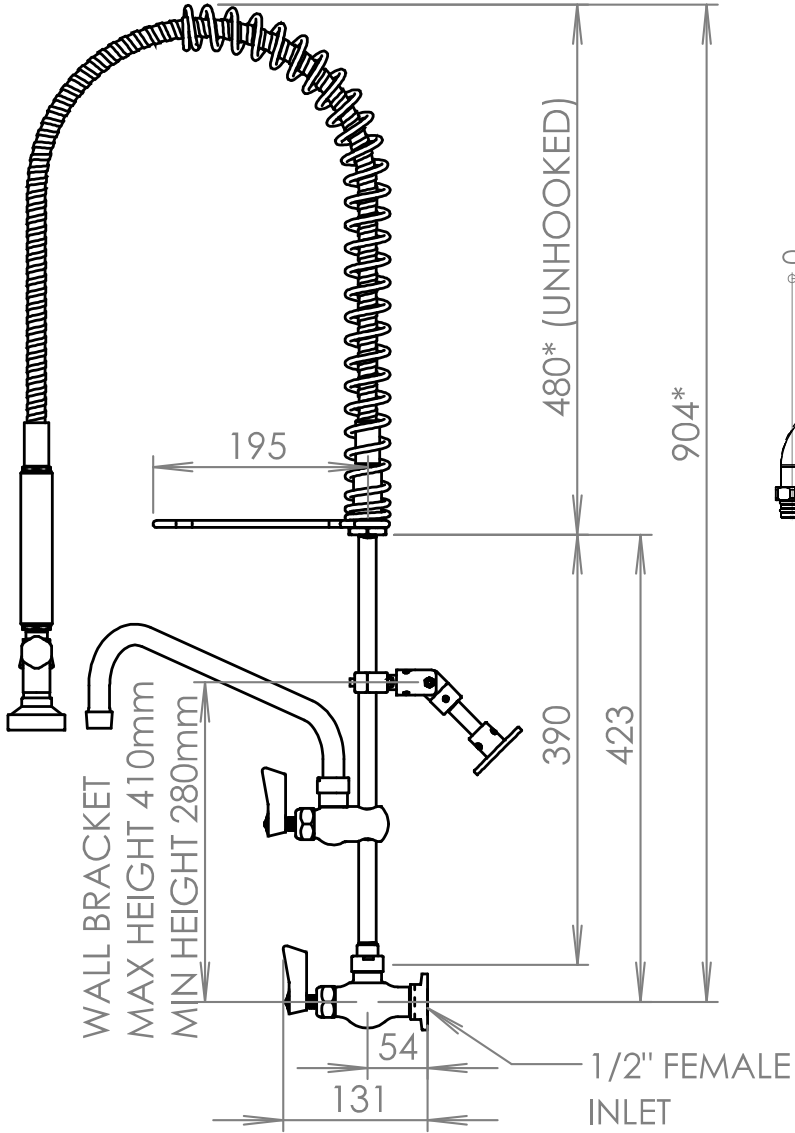

REF	LENGTH IN/MM	PART NO.
A	6" /179mm	GS3006
B	8" /227mm	GS3008
C	10" /276mm	GS3010
D	12" /326mm	GS3012
E	14" /376mm	GS3014

Other SPRAY GUN INTERCHANGABLE SPRAY TIPS

Other Spray Tip Supplied

FLAT FAN



Other Spray Tips Supplied


SHOWER




Tall
Adjustable
Midi
Cafe

Supplied with 12" / 300mm S/S Spout,
Other Spout Lengths
available – See Chart

SPRAY GUN INTERCHANGABLE SPRAY TIPS

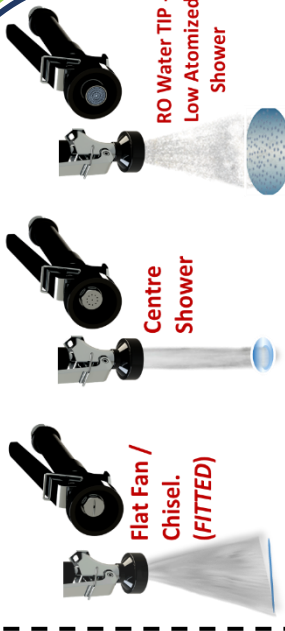

WARRANTY:
36 months
from install
date.

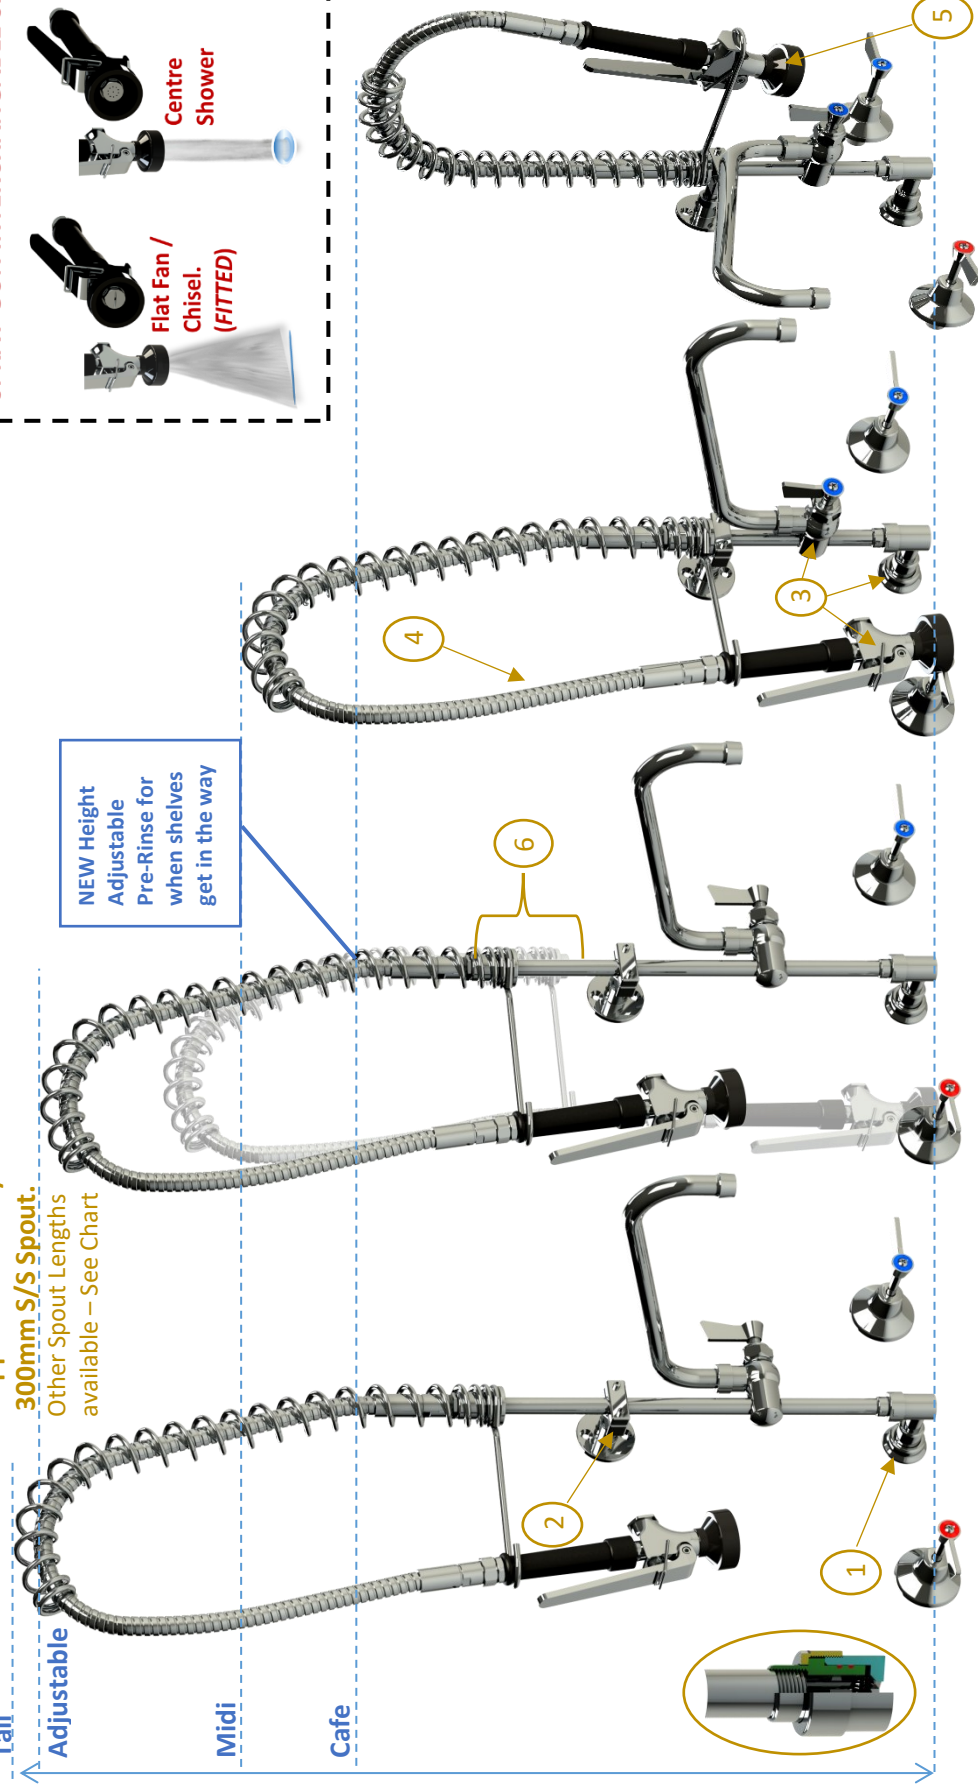


1. DROP N LOCK = fast assembly
2. Adjustable Wall Bracket.
3. Repair Kits AVAILABLE
4. S/S Super Tuff Armour-flex w- 1/2" fi Swivel ends
5. Australia's first Water Saving Spray Gun & still the MOST Reliable on Market.
6. Adjustable Height Spring Retainer. The First in the World. Designed & Made in Australia by GT.


NOTE: All Parts are Replaceable Nationally via Plumbing Stores

WALL STOPS Tap Feed: – HOT & COLD


TALL

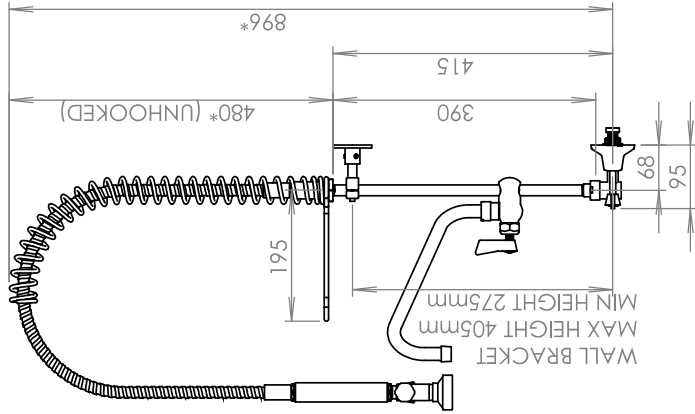


TALL - Adjustable

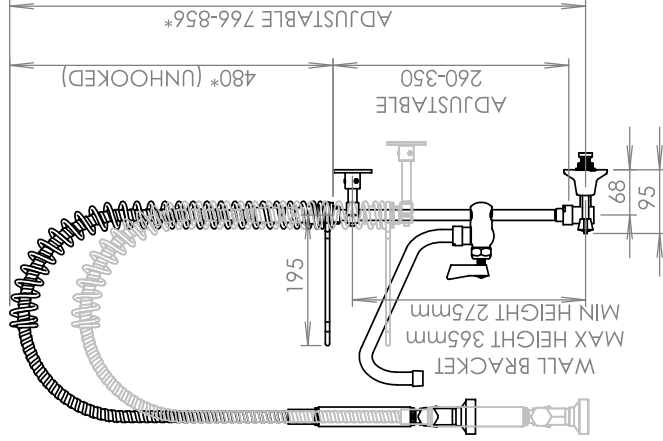

MIDI

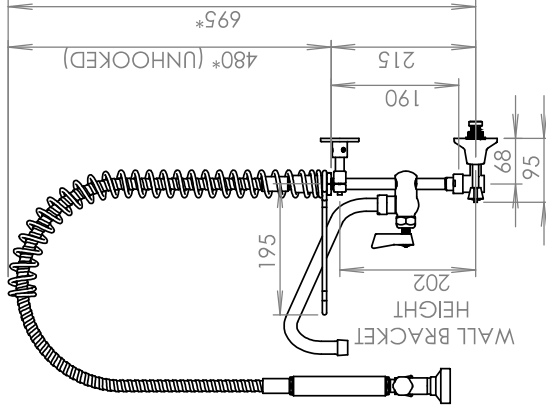


SHORT – Café

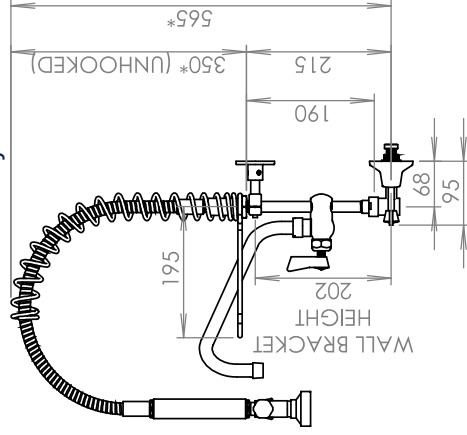


SPOUT CHART - Tall Model (applies to the other models w- suffix)		
PART No.	MODEL	Length
GF132506	6"	150mm
GF132508	8"	200mm
GF132510	10"	250mm
GF132512	12"	300mm
GF132514	14"	350mm
GF132516	16"	400mm

Products must be installed by registered Plumber in accordance with the PCA and AS/NZS3500.


ISOMETRIC View

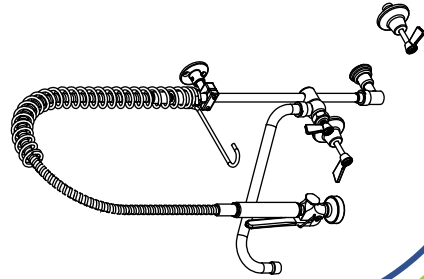

TOP View

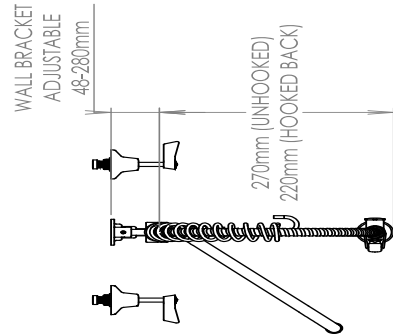

FRONT View

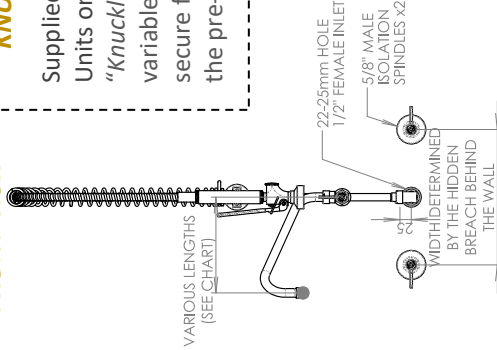

"KNUCKLE" - Sold separately. Pt. no. **G83KL**

Supplied with all 'RO' Units only. The "Knuckle" allows for variable angles of secure fastening of the pre-rinses to wall.



Technical: -
Aust. Standards.
"LEAD FREE"

WELS Reg. No.
1sts Outlet Spray Gun:
WELS Rated
Flow Rate
2nd Outlet – SPOUT

Mounting Hole
All Metal Material
Working Press.
Max. Press. Rate
Operating Temp

: Watermarked
Lic. 23008
: TM41650
: 6 Stars
: 4.5 lpm
: 9 lpm
: 25mm x 1, 32mm x 2
: Polished 304 S/S
: 500kpa. (NPC)
: 1500kpa.
: 1 - 80° C.

Made from 304 STAINLESS STEEL = Lead Free (LF)

Tall
Adjustable
Supplied with 12" /
300mm S/S Spout.
Other Spout Lengths
available – see chart

Midi


Cafe

SPRAY GUN INTERCHANGABLE SPRAY TIPS



WaterMark
Certificate No. 23008
Global Tapware Pty Ltd

WARRANTY:
36 months
from Install
date.

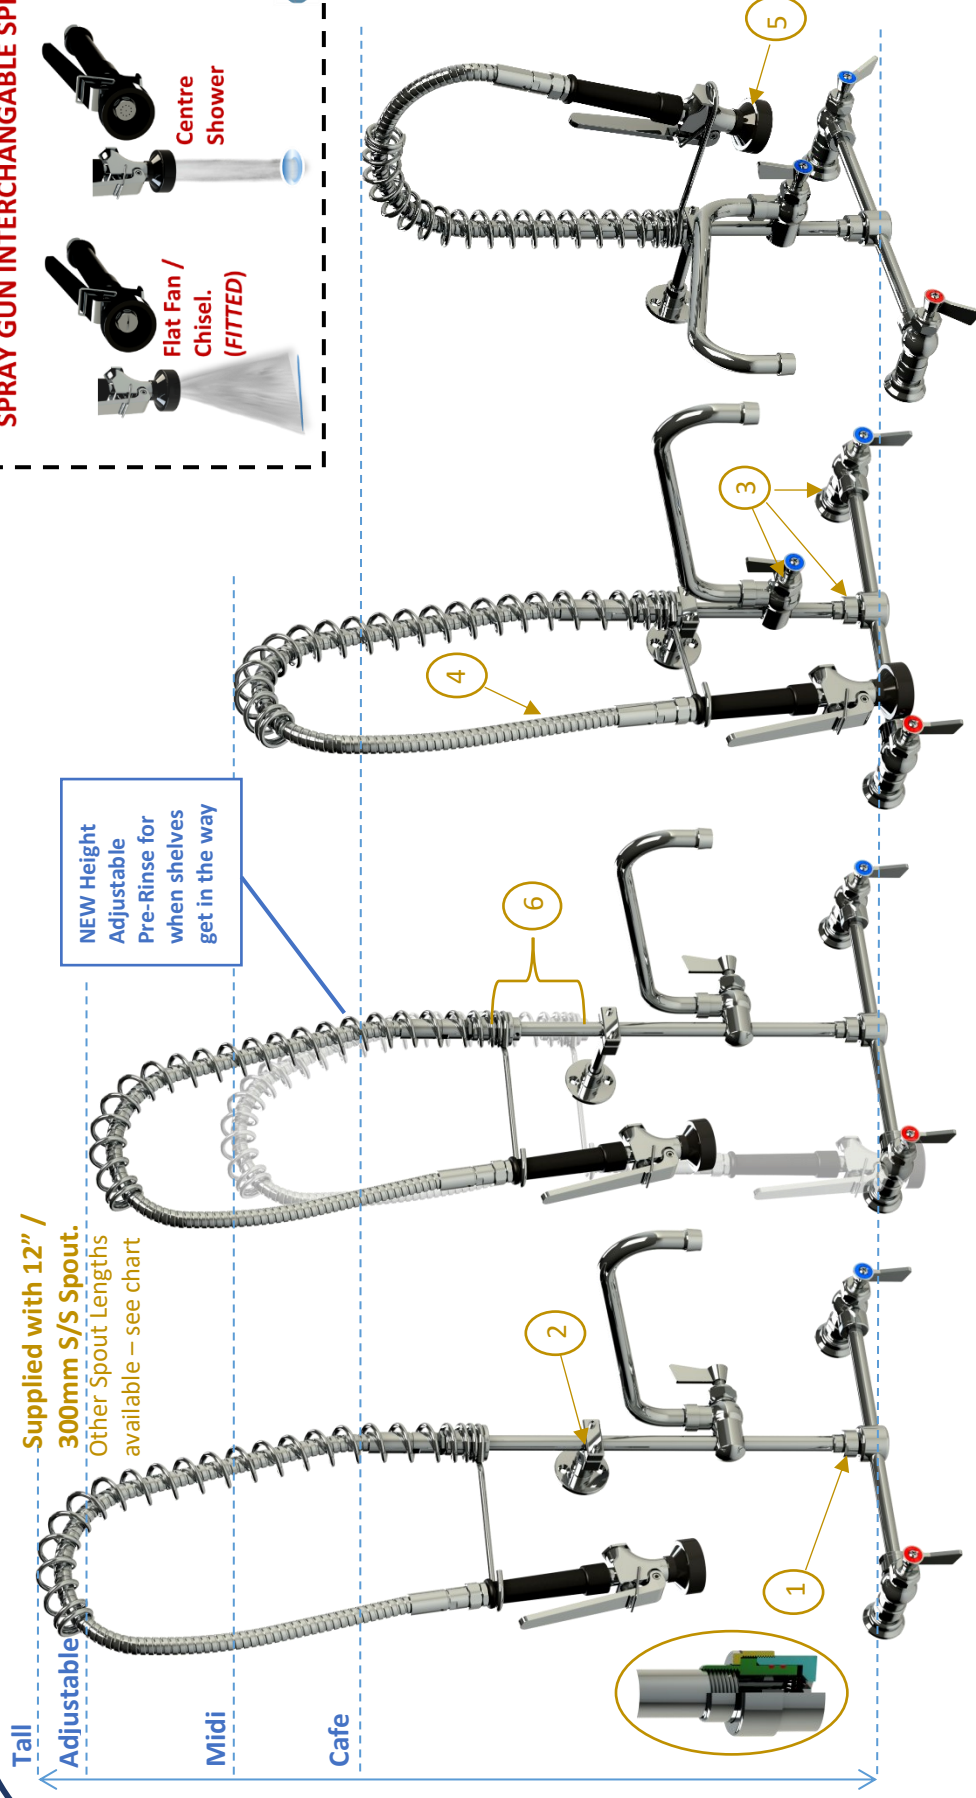

TALL

Pt. No. GF142512

TALL - Adjustable

Pt. No. GF142512-A

MIDI

Pt. No. GF142512-M

Café / Short

Pt. No. GF142512-C

1. DROP IN LOCK =
fast assembly

2. Adjustable
Wall Bracket.

3. Repair Kits
AVAILABLE

4. S/S Super Tuff Armour-flex
w- 1/2" fi Swivel ends

5. Australia's first Water Saving
Spray Gun & still the MOST
Reliable on Market.


6. Adjustable Height Spring
Retainer. The First in the
World. Designed & Made in

NOTE: All Parts are Replaceable Nationally via Plumbing Stores


Adj. Breach Wall Tap Feed: – HOT or COLD

SPOUT CHART - Tail Model (applies to the other models w- suffix)		
PART No.	MODEL	Length
GF142506AB	6"	150mm
GF142508AB	8"	200mm
GF142510AB	10"	250mm
GF142512AB	12"	300mm
GF142514AB	14"	350mm
GF142516AB	16"	400mm


TALL

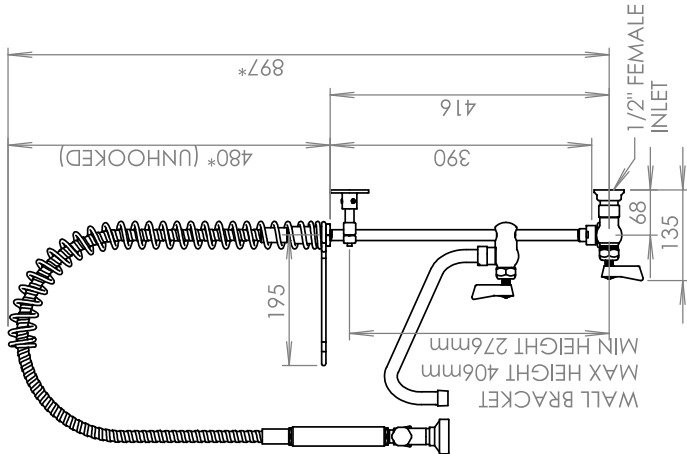


TALL - Adjustable

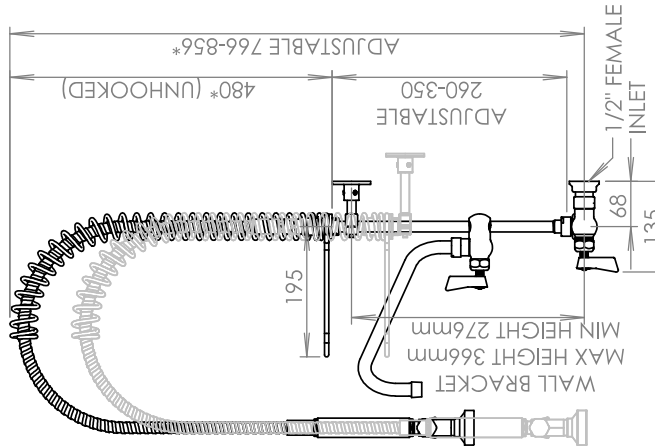

MIDI

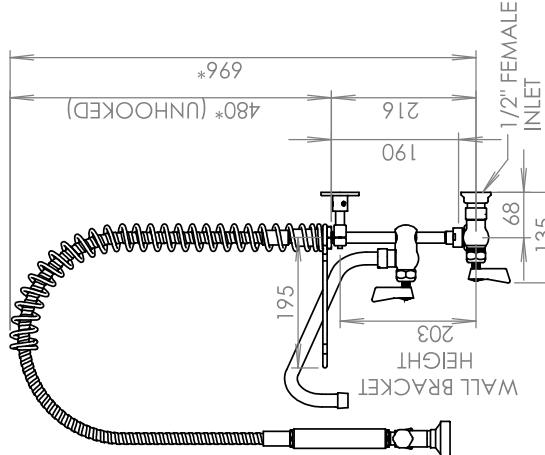


SHORT – Café

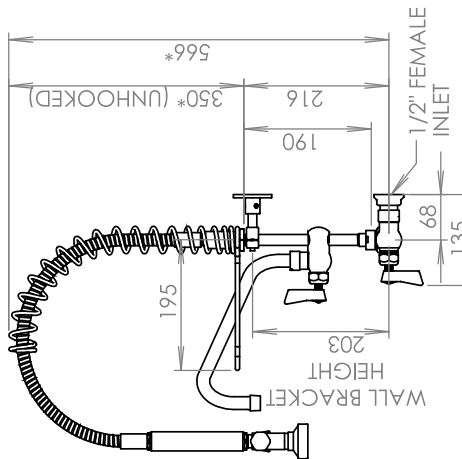


Products must be installed by registered Plumber in accordance with the PCA and AS/NZS3500.


ISOMETRIC View

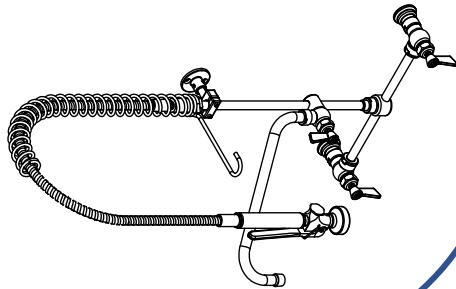

TOP View

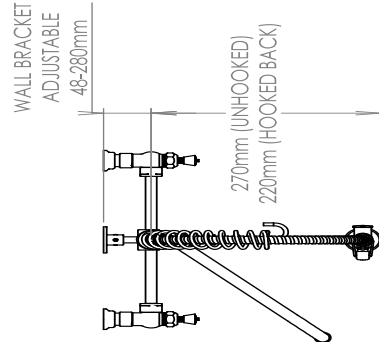

FRONT View

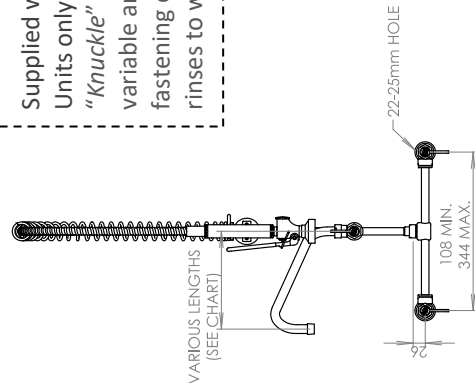

“KNUCKLE” – Sold separately. Pt. no. G83KL

Supplied with all ‘RO’ Units only. The “Knuckle” allows for variable angles of secure fastening of the pre-rinses to wall.



Technical -

Aust. Standards.
“LEAD FREE”

: Watermarked
Lic. 23008

: TM41647

: 6 Stars
: 4.5 lpm
: 9 lpm

WELS Reg. No.
1sts Outlet Spray Gun:
WELS Rated
Flow Rate
2nd Outlet – SPOUT

: 25mm x 2
: Polished 304 S/S
: 500kpa. (NPC)
: 1500kpa.
: 1 - 80° C.

Mounting Hole
All Metal Material
Working Press.
Max. Press. Rate
Operating Temp

Made from 304 STAINLESS STEEL = Lead Free (LF)

Tall Adjustable


Supplied with 12" / 300mm S/S Spout.

Other Spout Lengths available – see chart

NEW Height Adjustable Pre-Rinse for when shelves get in the way

* RO Units - See Separate Brochure

SPRAY GUN INTERCHANGABLE SPRAY TIPS

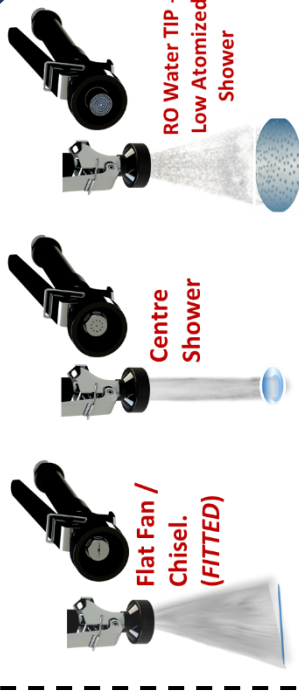

WARRANTY:
36 months from Install date.




Tall

Adjustable

Midi

Cafe

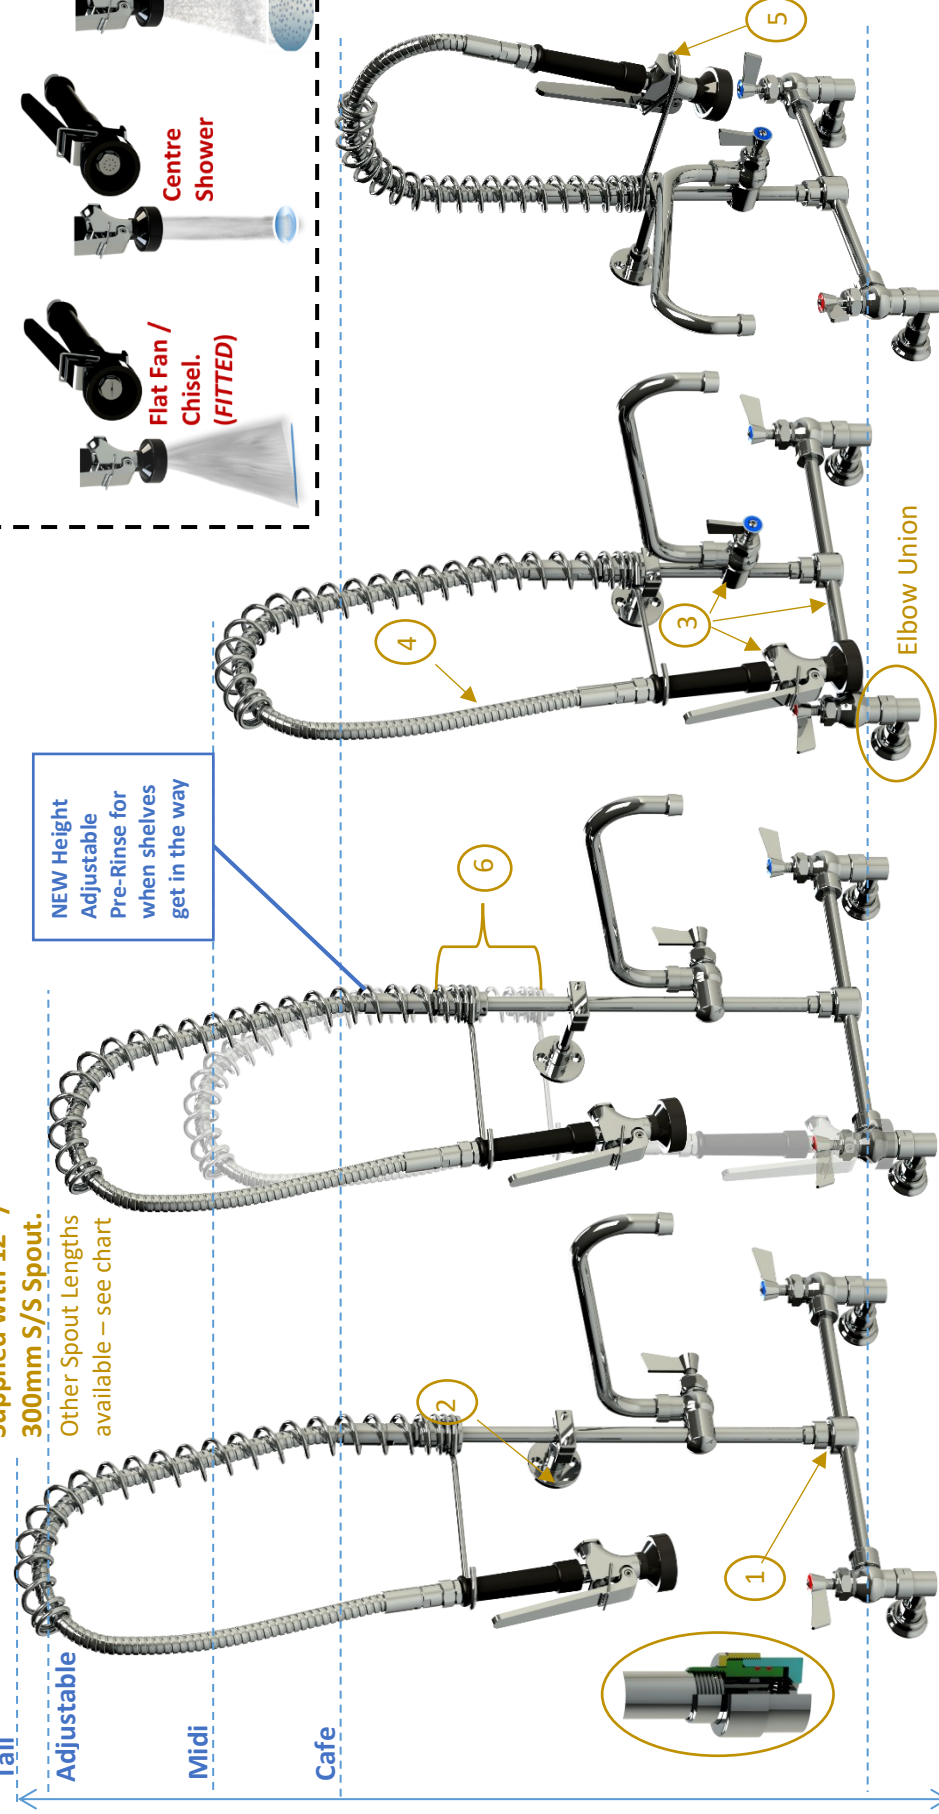

TALL

Pt. No. GF152512AB

TALL - Adjustable

Pt. No. GF152512AB-A

MIDI

Pt. No. GF152512AB-M

Cafe

Pt. No. GF152512AB-C

1. DROP N LOCK = fast assembly

2. Adjustable Wall Bracket.

3. Repair Kits AVAILABLE

4. S/S Super Tuff Armour-flex w- 1/2" fi Swivel ends


5. Australia's first Water Saving Spray Gun & still the MOST Reliable on Market.

6. Adjustable Height Spring Retainer. The First in the World. Designed & Made in Australia by GT.


NOTE: All Parts are Replaceable Nationally via Plumbing Stores

Exposed Adj. Breach Tap Feed: – HOT & COLD


TALL

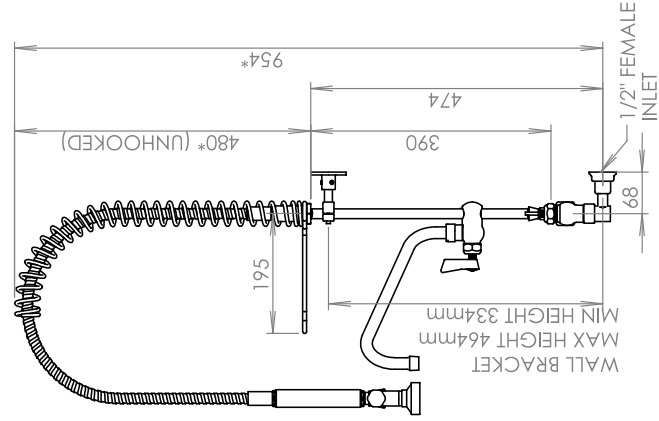


TALL - Adjustable

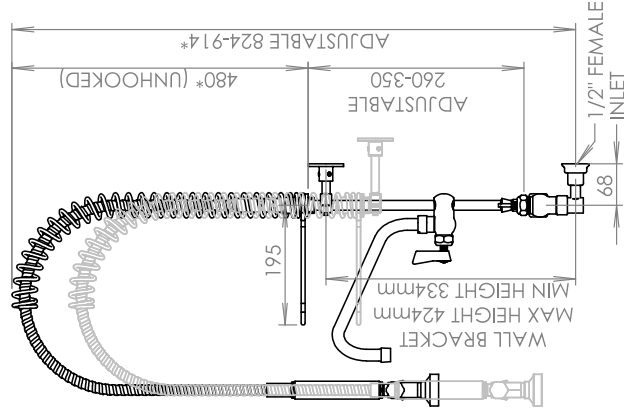

MIDI

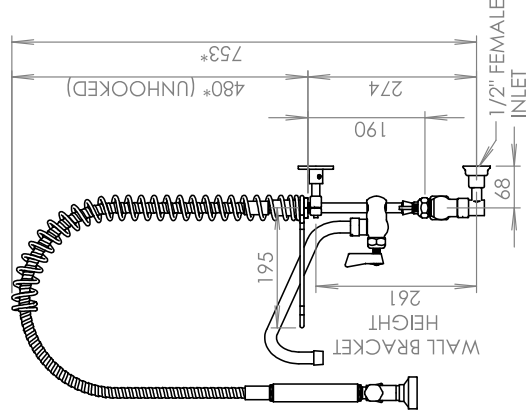


SHORT – Café

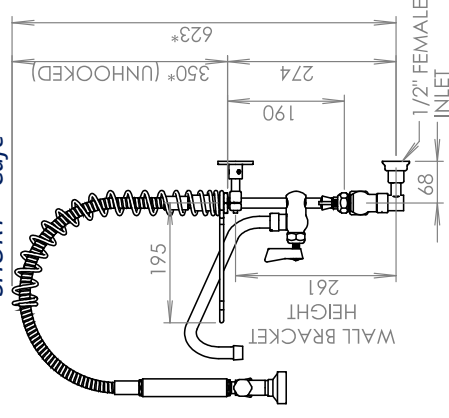


SPOUT CHART - Tall Model (applies to the other models w- suffix)		
PART No.	MODEL	Length
GF152506AB	6"	150mm
GF152508AB	8"	200mm
GF152510AB	10"	250mm
GF152512AB	12"	300mm
GF152514AB	14"	350mm
GF152516AB	16"	400mm

Products must be installed by registered Plumber in accordance with the PCA and AS/NZS3500.


ISOMETRIC View

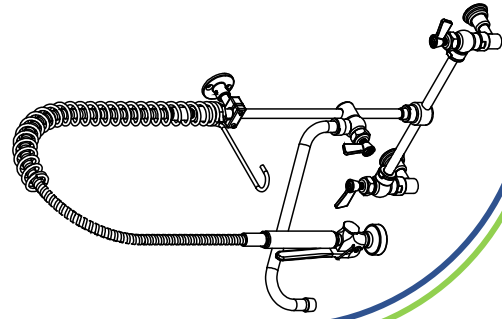

TOP View

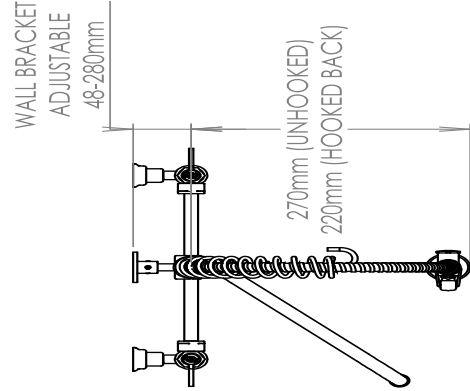

FRONT View

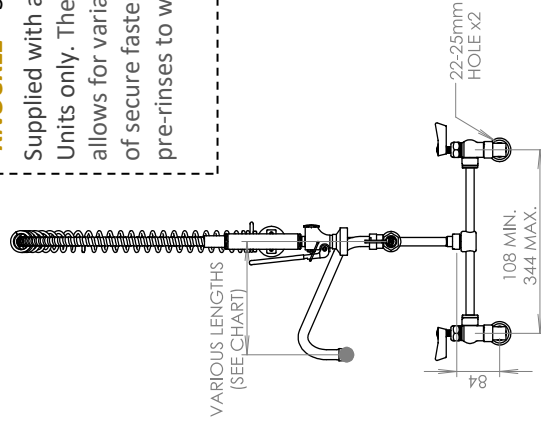

"KNUCKLE" - Sold separately. Pt. no. **G83KL**

Supplied with all "RO" Units only. The "Knuckle" allows for variable angles of secure fastening of the pre-rinses to wall.



Technical: -
Aust. Standards.
"LEAD FREE"

WELS Reg. No.
1st Outlet Spray Gun:
WELS Rated
Flow Rate
2nd Outlet – SPOUT

Mounting Hole
All Metal Material
Working Press.
Max. Press. Rate
Operating Temp

: Watermarked
Lic. 23008

: TM41651

: 6 Stars
: 4.5 lpm
: 9 lpm

: 25mm x 2

: Polished 304 S/S
: 500kpa. (NPC)
: 1500kpa.
: 1 - 80° C.

'Global Fisher™'

Exp. Breach Wall Pre-Rinses w- Pot Filler

For use with RO Water & FOOD Prep

Pt. No. – **GF152512-SS**

The '**KNUCKLE**' Allows Adjustable Wall Bracketing. Supplied w- RO PR taps for height adjustable sinks.



**SHOWER
Spray Tip Supplied
Low ATOMIZATION**

Key Features

- **Premium Material:** Constructed from polished 304 stainless steel (S/S).
- **Inner Tube of Pre-Rinse Hose:** Santoprene rubber with S/S Braid cover and another Protective outer S/S Spiral Sheath.
- **Watermarked PR HOSE:** Separately Tested & passed to AS4020 & AS3499.
- **Safety & Convenience:** Squeeze lever with lock-on and quick-release shut-off (OH&S feature).
- **Riser Sub-Assembly:** Made & tested in our Brisbane Factory.
- **Wall Bracket:** Was Designed & Made Specifically for Height Adjustable Sink Tables in mind.
- **Soft Spray Tip:** From End-User feed-back we Redesigned & made this current **Soft Spray Tip** specifically for minimizing the **Atomization of over spray** to the lowest amount possible.
- **Food Prep:** This Spray Tip can also be used in Food preparation areas to avoid bruising.
- **Interchangeable tips:** Other types of tips are available – see back page.

Warranty

- **Commercial Use:** 36 months

Technical: -

Australian Standards

Lead free

**: Watermarked
Lic. 23008**

WELS Reg. No.

:TM41651

1sts Outlet

WELS Rated
Flow Rate

Spray Gun – Flat Fan Tip

: 6 Stars
: 4.5 lpm

2nd Outlet

WELS Rated
Flow Rate

: Spout
: 3 Stars
: 9 lpm

Tap Mounting Hole
Material
Finish

: 25mm
: 304 S/S
: Polished S/S

Working Press.
Max. Press. rate
Tap Operating Temp

: 500kpa. (NPC)
: 1500kpa.
: 1 - 65° C.

Global Tapware Pty Ltd



E – info.tech@globaltapware.com

P – 07 38 55 2350

P – 1300 85 25 15

W- GLOBALTAPWARE.COM.AU

Product must be installed by registered Plumber in accordance with the PCA and AS/NZS3500.

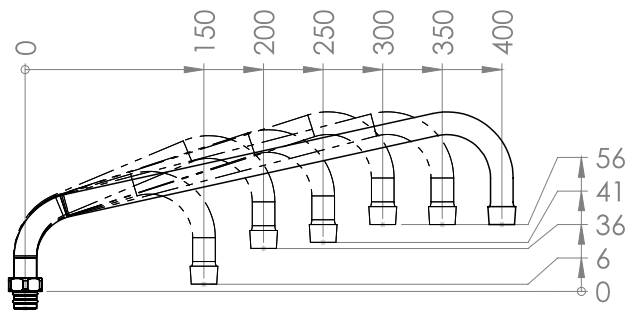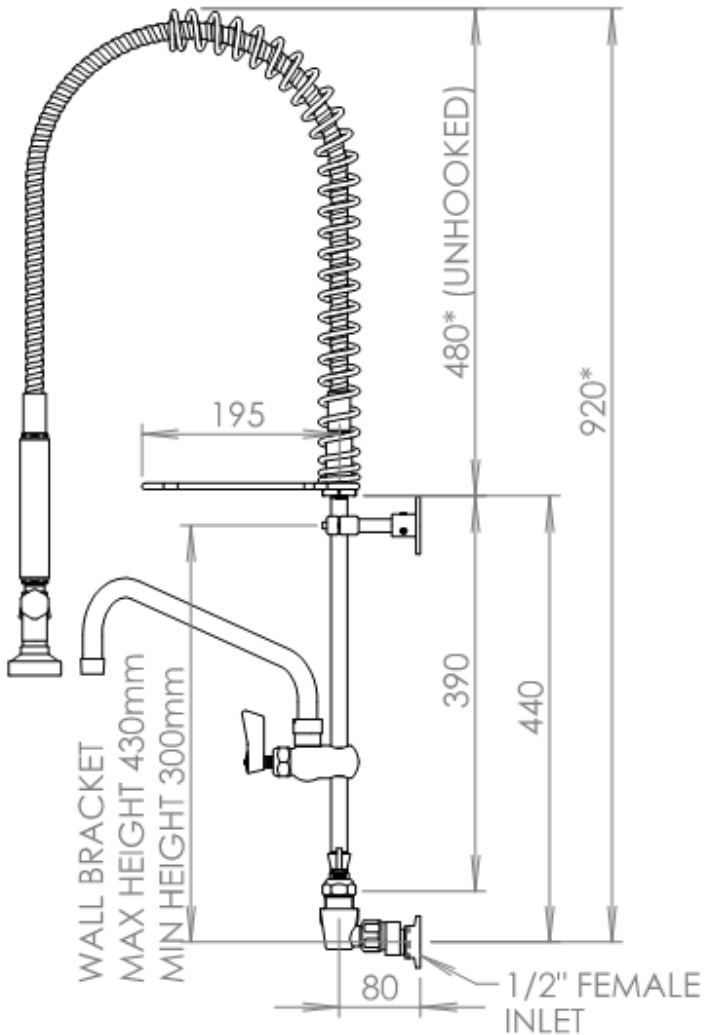

REF	LENGTH IN/MM	PART NO.
A	6" /179mm	GS3006
B	8" /227mm	GS3008
C	10" /276mm	GS3010
D	12" /326mm	GS3012
E	14" /376mm	GS3014

Other SPRAY GUN INTERCHANGABLE SPRAY TIPS

Other Spray Tip Supplied

FLAT FAN



Other Spray Tips Supplied

SHOWER



'Global Fisher™'


Exposed Breach WALL Pre-Rinses w- Pot Filler

For use with RO Water & FOOD Prep

Pt. No. –
GF152512-SS



The '**KNUCKLE**' Allows Adjustable Wall Bracketing. Supplied w- RO PR taps for height adjustable sinks.

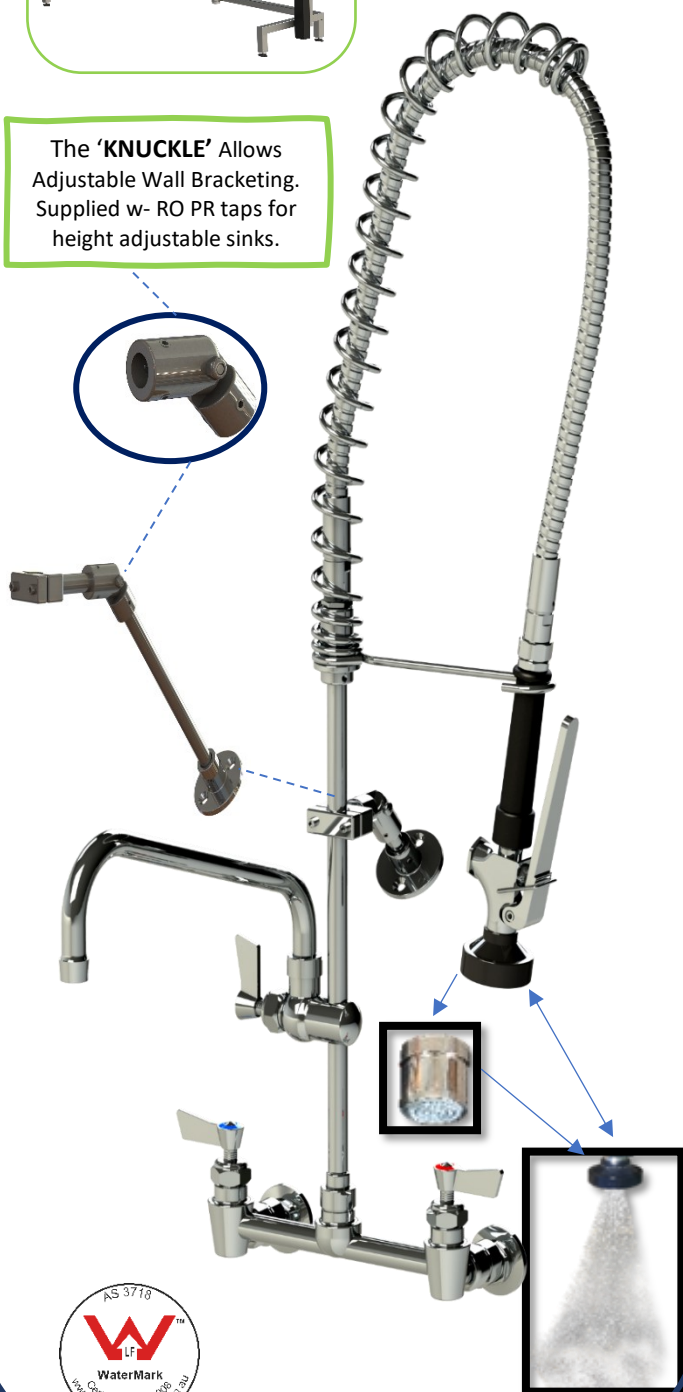

Key Features

- **Premium Material:** Constructed from polished 304 stainless steel (S/S).
- **Inner Tube of Pre-Rinse Hose:** Santoprene rubber with S/S Braid cover and another Protective outer S/S Spiral Sheath.
- **Watermarked PR HOSE:** Separately Tested & passed to AS4020 & AS3499.
- **Safety & Convenience:** Squeeze lever with lock-on and quick-release shut-off (OH&S feature).
- **Riser Sub-Assembly:** Made & tested in our Brisbane Factory.
- **Wall Bracket:** Was Designed & Made Specifically for Height Adjustable Sink Tables in mind.
- **Soft Spray Tip:** From End-User feed-back we Redesigned & made this current **Soft Spray Tip** specifically for minimizing the **Atomization of over spray** to the lowest amount possible.
- **Food Prep:** This Spray Tip can also be used in Food preparation areas to avoid bruising.
- **Interchangeable tips:** Other types of tips are available – see back page.

Warranty

- **Commercial Use:** 36 months

Technical: -

Australian Standards

Lead free

WELS Reg. No.

1sts Outlet

WELS Rated

Flow Rate

2nd Outlet

WELS Rated

Flow Rate

Tap Mounting Hole

Material

Finish

Working Press.

Max. Press. rate

Tap Operating Temp

: **Watermarked**
Lic. 23008

: **TM41650**

Spray Gun – Flat Fan Tip

: **6 Stars**

: **4.5 lpm**

: **Spout**

: **3 Stars**

: **9 lpm**

: **25mm**

: **304 S/S**

: **Polished S/S**

: **500kpa. (NPC)**

: **1500kpa.**

: **1 - 80° C.**


Global Tapware Pty Ltd

E – info.tech@globaltapware.com


P – 07 38 55 2350

P – 1300 85 25 15


W- GLOBALTAPWARE.COM.AU

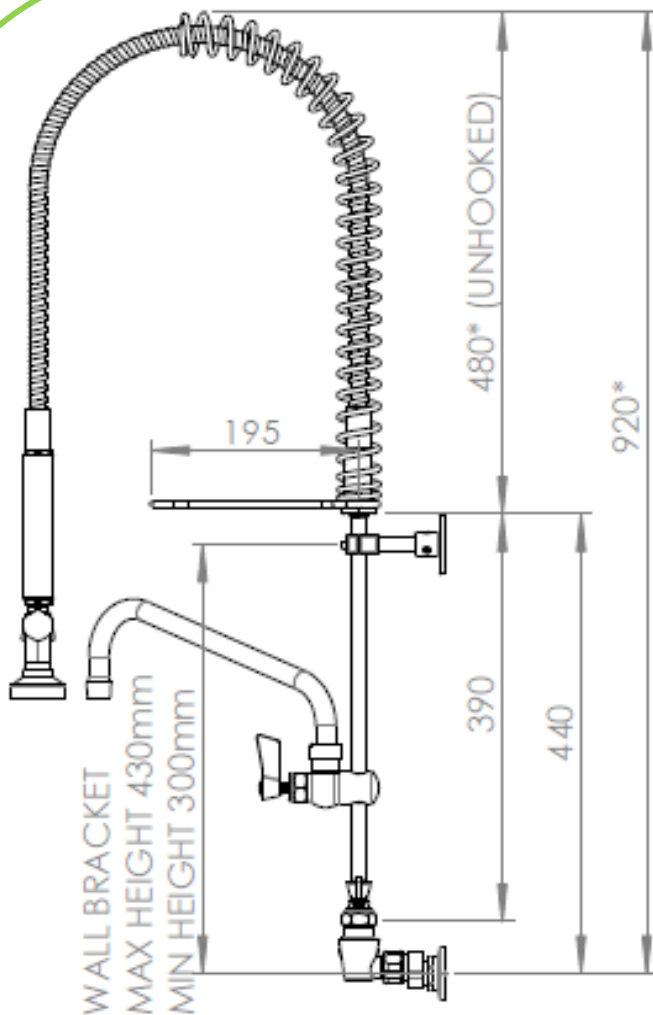

Product must be installed by registered Plumber in accordance with the PCA and AS/NZS3500.

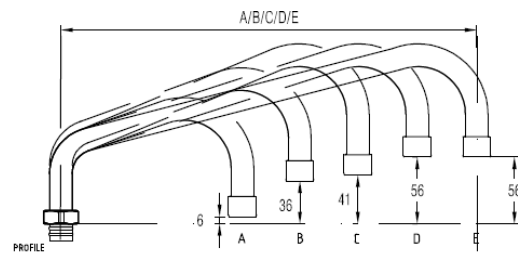


REF	LENGTH IN/MM	PART NO.
A	6" /179mm	GS3006
B	8" /227mm	GS3008
C	10" /276mm	GS3010
D	12" /326mm	GS3012
E	14" /376mm	GS3014

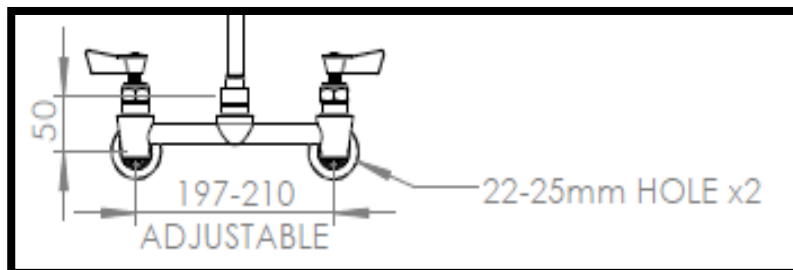

Other SPRAY GUN INTERCHANGABLE SPRAY TIPS

Spray Tip
Supplied Fitted:
 FLAT FAN

Other Spray Tips
Supplied:
 SHOWER



Height Adjusting Sink

Supplied with 12" / 300mm S/S Spout.
Other Spout Lengths available – see chart on page 10

NEW Height Adjustable Pre-Rinse for when shelves get in the way

SPRAY GUN INTERCHANGEABLE SPRAY TIPS

- Flat Fan / Chisel. (FITTED)
- Centre Shower
- RO Water TIP - Low Atomized Shower

WaterMark
AS3718
Certificate No. 23008
Global Tapware Pty Ltd

WARRANTY:
36 months from Install date.

WATER RATING
4.5 litres per minute (spray tip)
WaterMark No. 0368
Global Tapware

Tall
Pt. No. GF162512

Adjustable
Pt. No. GF162512-A

MIDI
Pt. No. GF162512-M

Café
Pt. No. GF162512-C

1. DROP N LOCK = fast assembly
2. Adjustable Wall Bracket.
3. Repair Kits AVAILABLE
4. S/S Super Tuff Armour-flex w- 1/2" fi Swivel ends
5. Australia's first Water Saving Spray Gun & still the MOST Reliable on Market.
6. Adjustable Height Spring Retainer. The First in the World. Designed & Made in Australia by GT.


NOTE: All Parts are Replaceable Nationally via Plumbing Stores

SINGLE OUTLET (No Tap) Feed: -- HOT or COLD or Mixed


Products must be installed by registered Plumber in accordance with the PCA and AS/NZS3500.

SPOUT CHART - Tall Model (applies to the other models w- suffix)		
PART No.	MODEL	Length
GF162506	6"	150mm
GF162508	8"	200mm
GF162510	10"	250mm
GF162512	12"	300mm
GF162514	14"	350mm
GF162516	16"	400mm


TALL

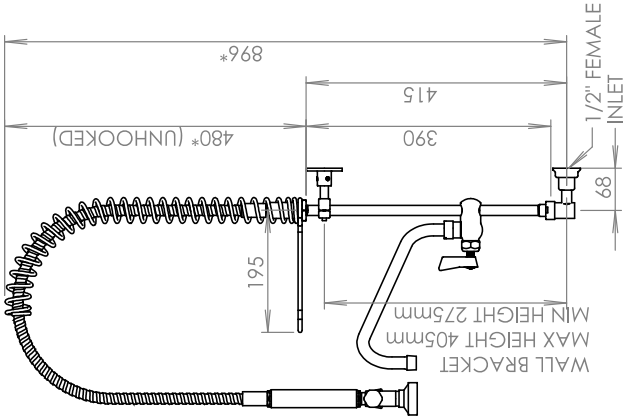


TALL - Adjustable

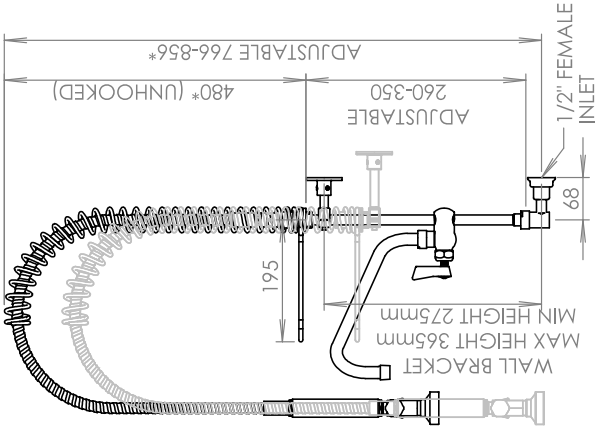


MIDI

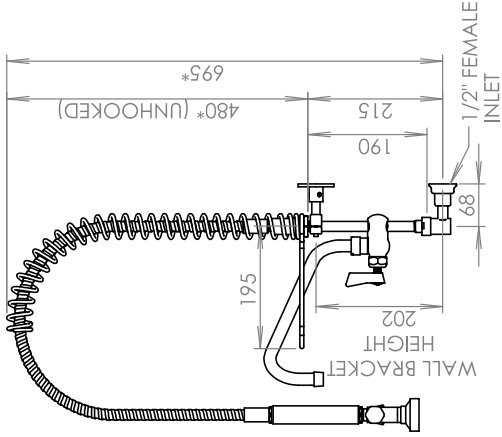


SHORT - Café

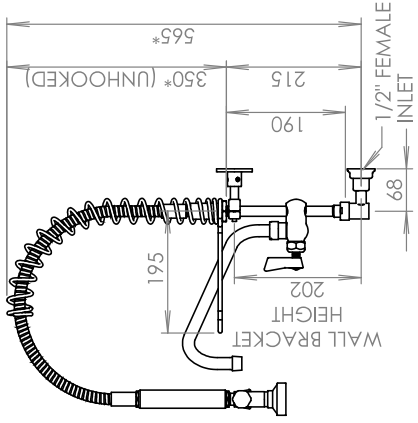


ISOMETRIC View

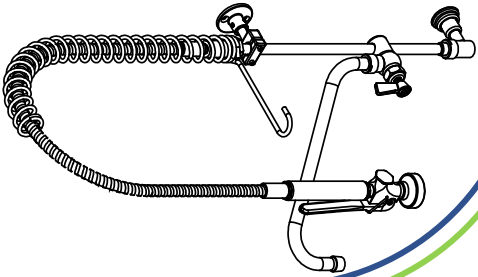

TOP View

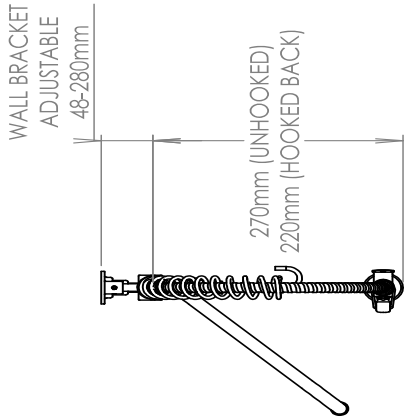

FRONT View

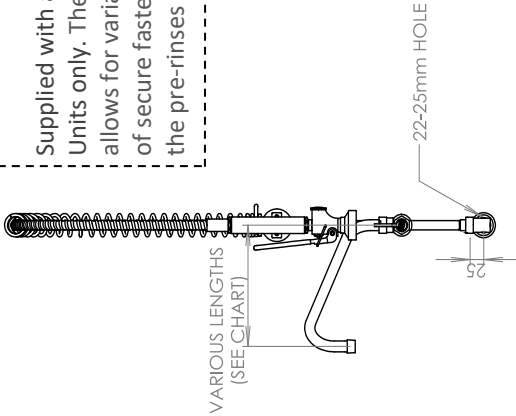

"KNUCKLE" - Sold separately. Pt. no. G83KL

Supplied with all "RO" Units only. The "Knuckle" allows for variable angles of secure fastening of the pre-rinses to wall.



Technical: -

Aust. Standards.
"LEAD FREE"

: Watermarked
Lic. 23008

WELS Reg. No.

1sts Outlet Spray Gun:

WELS Rated

Flow Rate

2nd Outlet - SPOUT

: 6 Stars

: 4.5 lpm

: 9 lpm

Mounting Hole

All Meta Material

Working Press.

Max. Press. Rate

Operating Temp

: 25mm

: 304 Polished S/S

: 500kpa. (NPC)

: 1500kpa.

: 1 - 80° C.



Manufacturers of Quality Commercial Tapware



WWW.GLOBALTAPWARE.COM.AU

P1 - 07 3855 2350

P2 - 1300 85 25 15

E - info.tech@globaltapware.com