

GLOBAL *FISHER* PRE-RINSES

- **WALL MOUNT** -

STANDARD

MODELS

BROCHURE BOOK models:

GF11, GF13, GF14, GF15, GF16

QR Code
insert



INDEX

GLOBAL FISHER brand

Technical Drawings for: **WALL Pre-Rinses STANDARD**

PAGE		PRODUCT CODE
		Single Wall Tap
4 - 5		GF112100 Tall
4 - 5		GF112100-A Adjustable
4 - 5		GF112100-M Midi
4 - 5		GF112100-C Short - Cafe
6 - 7		GF112100-SS RO TAP
		Wall Stops tap
8 - 9		GF132100 Tall
8 - 9		GF132100-A Adjustable
8 - 9		GF132100-M Midi
8 - 9		GF132100-C Short - Cafe
		Straight Adjustable Exposed Breach Wall Tap
10 - 11		GF142100AB Tall (New in 2025)
10 - 11		GF142100AB-A Adjustable “ “ “
10 - 11		GF142100AB-M Midi “ “ “
10 - 11		GF142100AB-C Short –Café “ “ “
		Elbow Adjustable Exposed Breach Wall Tap
12 - 13		GF152100AB Tall (New in 2025)
12 - 13		GF152100AB-A Adjustable “ “ “
12 - 13		GF152100AB-M Midi “ “ “
12 - 13		GF152100AB-C Short –Café “ “ “
		Adjustable Elbow Exposed Breach Wall Tap
14 - 15		GF152100 Tall
14 - 15		GF152100-A Adjustable
14 - 15		GF152100-M Midi
14 - 15		GF152100-C Short –Café
16 - 17		GF152100-SS RO TAP
		Elbow Outlet Only (No wall tap)
18 - 19		GF162100 Tall
18 - 19		GF162100-A Adjustable
18 - 19		GF162100-M Midi
18 - 19		GF162100-C Short –Café
		Hanging Wall Bracket Set Up – No Tap.
20 - 21		GTKFCWB-PR01

Tall

Adjustable

Midi

Cafe

***RO Units – See Separate brochure**

Flat Fan / Chisel. (FITTED)

Centre Shower

RO Water Tip - Low Atomized Shower

WaterMark
 Certificate No: 23008
 Global Tapware Pty Ltd

WARRANTY:
 36 months from Install date.

WATER RATING
 4.5 litres per minute (spray cup)
 AS/NZS 4020:2002
 WaterMark No. 01068
 Global Tapware



1. **DROP N LOCK** = fast assembly
2. **Adjustable Wall Bracket.**
3. **Repair Kits AVAILABLE**
4. **S/S Super Tuff Armour-flex w- 1/2" fi Swivel ends**
5. **Australia's first Water Saving Spray Gun & still the MOST Reliable on Market.**
6. **Adjustable Height Spring Retainer.** The First in the World. Designed & Made in Australia by GT.

NOTE: All Parts are Replaceable Nationally via Plumbing Stores


SINGLE WALL Tap Feed: – HOT or COLD or MIXED

TALL


TALL - Adjustable

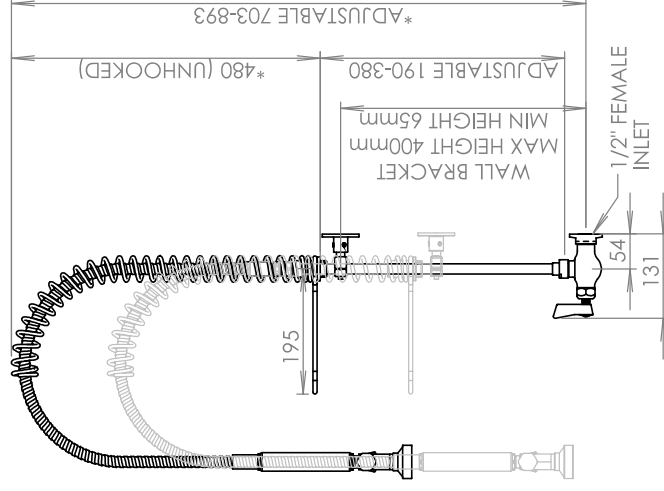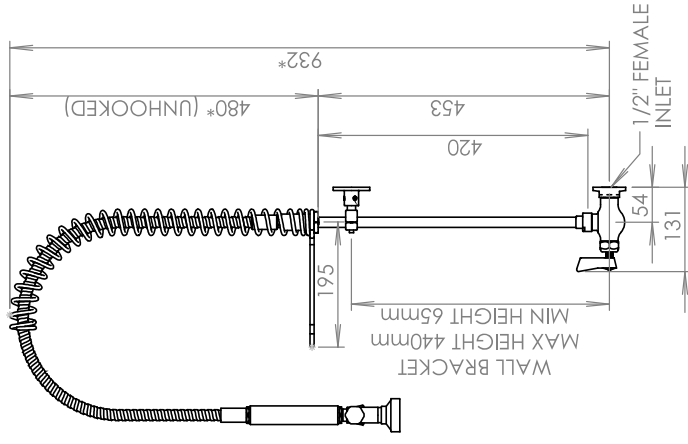

MIDI

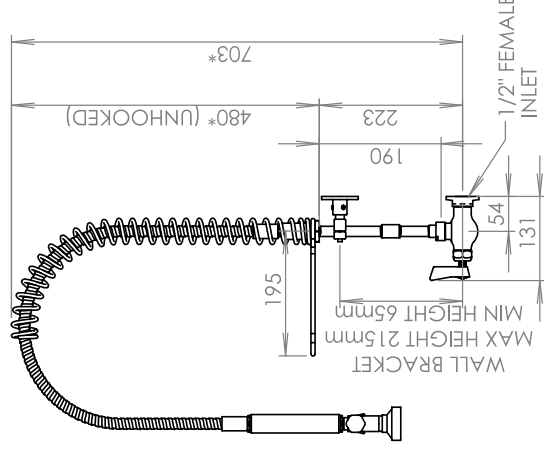


Café / SHORT

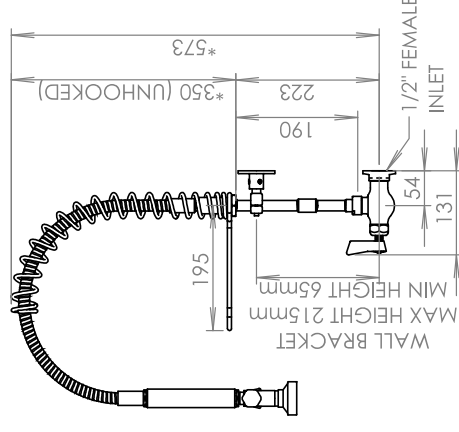


Product must be installed by registered Plumber in accordance with the PCA and AS/NZS3500.


ISOMETRIC View

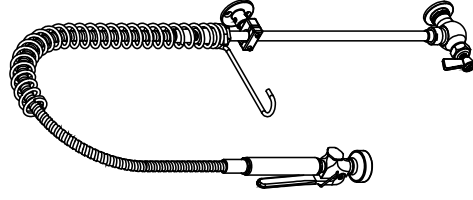

TOP View

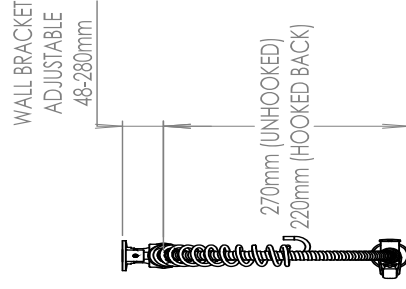

FRONT View

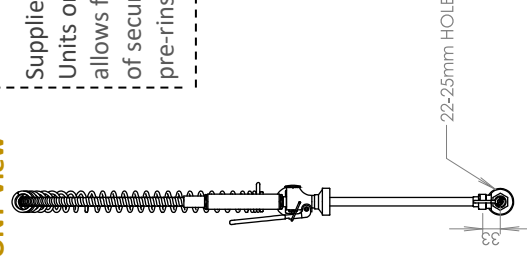

"KNUCKLE" - Sold separately. Pt. no. G83KL

Supplied with all 'RO' Units only. The "knuckle" allows for variable angles of secure fastening of the pre-rinses to wall.



Technical: -

Aust. Standards. "LEAD FREE"

: Watermarked Lic. 23008

WELS Reg. No.

1st Outlet Spray Gun:

WELS Rated

Flow Rate

: 6 Stars

: 4.5 lpm

: 25mm

: Polished 304 S/S

: 500kpa. (NPC)

: 1500kpa.

: 1 - 80° C.

Mounting Hole

All Metal Material

Working Press.

Max. Press. Rate

Operating Temp

'Global Fisher™' Single WALL Pre-Rinses - Standard For use with RO Water & FOOD Prep

Pt. No. – **GF112100-SS**

The '**KNUCKLE**' Allows Adjustable Wall Bracketing. Supplied w- RO PR taps for height adjustable sinks.



SHOWER
Spray Tip Supplied
Low ATOMIZATION

Key Features

- **Premium Material:** Constructed from polished 304 stainless steel (S/S).
- **Inner Tube of Pre-Rinse Hose:** Santoprene rubber with S/S Braid cover and another Protective outer S/S Spiral Sheath.
- **Watermarked PR HOSE:** Separately Tested & passed to AS4020 & AS3499.
- **Safety & Convenience:** Squeeze lever with lock-on and quick-release shut-off (OH&S feature).
- **Riser Sub-Assembly:** Made & tested in our Brisbane Factory.
- **Wall Bracket:** Was Designed & Made Specifically for Height Adjustable Sink Tables in mind.
- **Soft Spray Tip:** From End-User feed-back we Redesigned & made this current **Soft Spray Tip** specifically for minimizing the **Atomization of over spray** to the lowest amount possible.
- **Food Prep:** This Spray Tip can also be used in Food preparation areas to avoid bruising.
- **Interchangeable tips:** Other types of tips are available – see back page.

Warranty

- **Commercial Use:** 36 months

Technical: -

Australian Standards	: Watermarked
<u>"LEAD FREE"</u>	Lic. 23008
WELS Reg. No.	TM41499
1sts Outlet	Spray Gun – Flat Fan Tip
WELS Rated	: 6 Stars
Flow Rate	: 4.5 lpm
Tap Mounting Hole	: 25mm
Material	: 304 S/S
Tap Finish	: Polished S/S
Working Press.	: 500kpa. (NPC)
Max. Press. rate	: 1500kpa.
Tap Operating Temp	: 1 - 80° C.

Global Tapware Pty Ltd


E – info.tech@globaltapware.com

P – 07 38 55 2350

P – 1300 85 25 15

W- GLOBALTAPWARE.COM.AU

Product must be installed by registered Plumber in accordance with the PCA and AS/NZS3500.

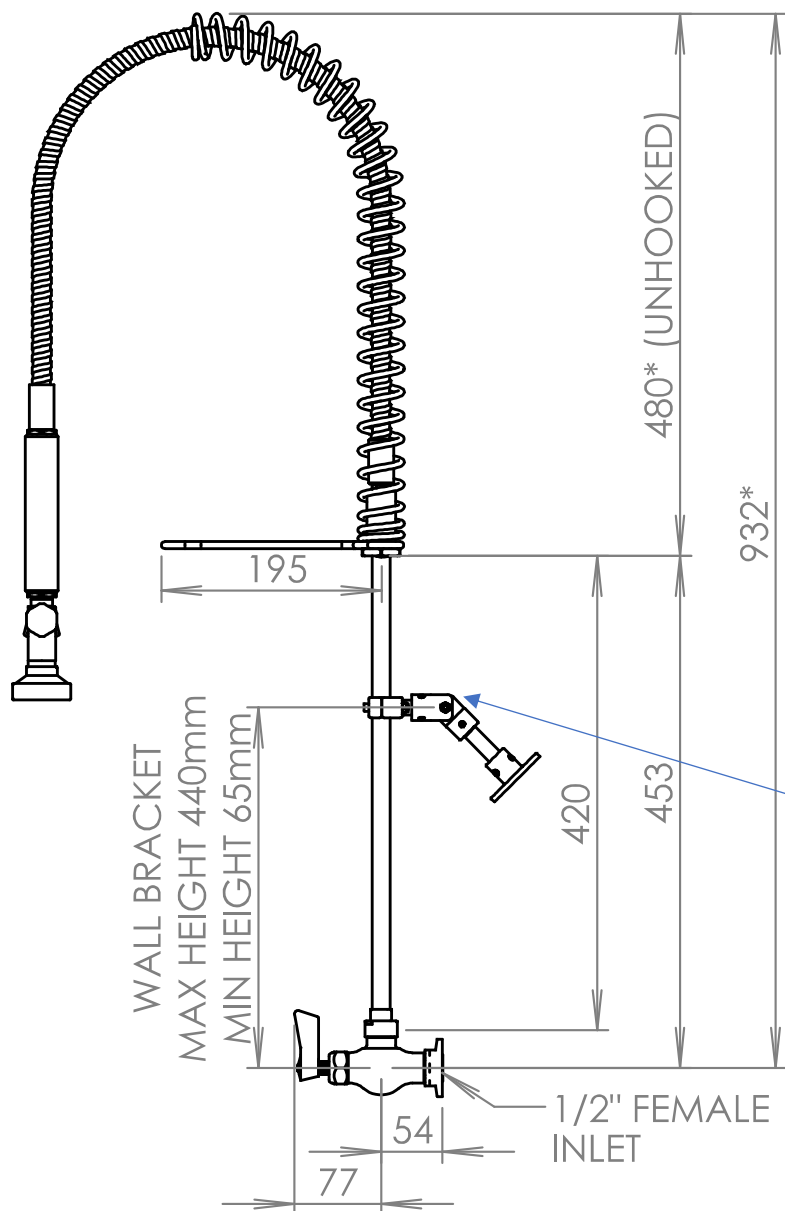

The **KNUCKLE**. Allows for a fully Adjustable Wall Bracket Mounting System



Pt. No. G83KL

Supplied only with these Pre-Rinses but sold separately for others.



Other SPRAY GUN INTERCHANGABLE SPRAY TIPS

Other Spray Tip
Supplied:
FLAT FAN



Other Spray Tip
Supplied:
SHOWER



Made from 304 **STAINLESS STEEL** = Lead Free (LF)

Tall

Adjustable

Midi


Cafe

1. DROP N LOCK = fast assembly
2. Adjustable Wall Bracket.
3. Repair Kits AVAILABLE
4. S/S Super Tuff Armour-flex w- 1/2" fi Swivel ends
5. Australia's first Water Saving Spray Gun & still the MOST Reliable on Market.
6. Adjustable Height Spring Retainer. The First in the World. Designed & Made in Australia by GT.


NOTE: All Parts are Replaceable Nationally via Plumbing Stores

Wall Stop Tap Feed: – HOT & COLD


TALL

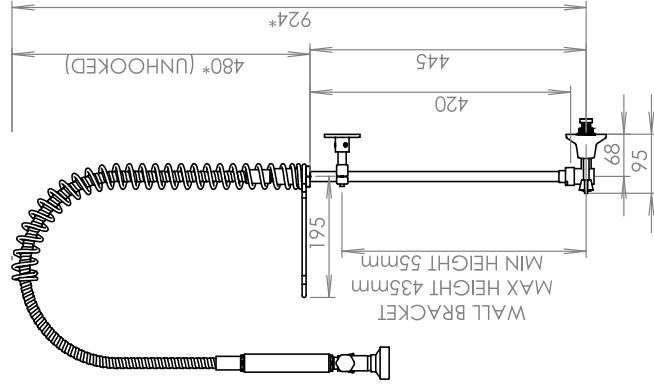


TALL - Adjustable

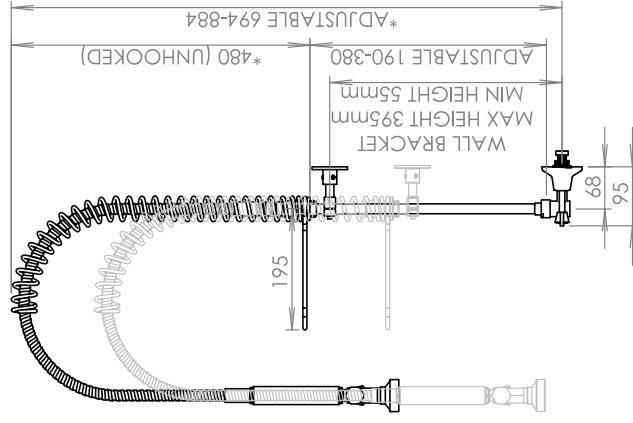

MIDI

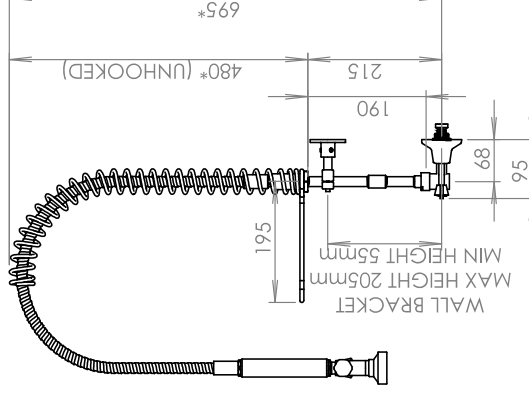


SHORT – Café

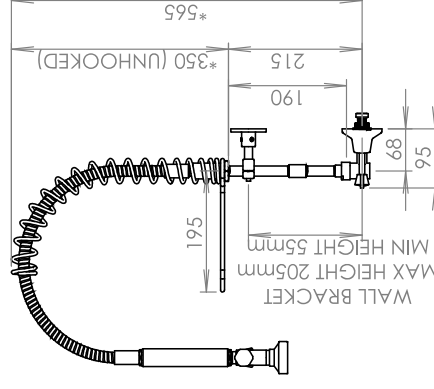


Product must be installed by registered Plumber in accordance with the PCA and AS/NZS3500.


ISOMETRIC View

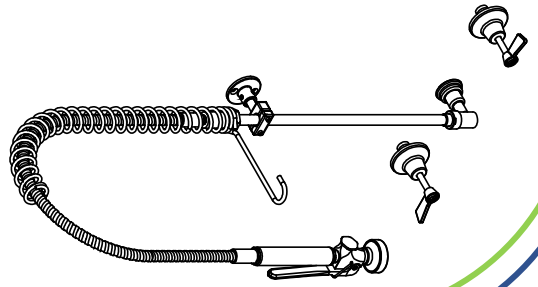

TOP View

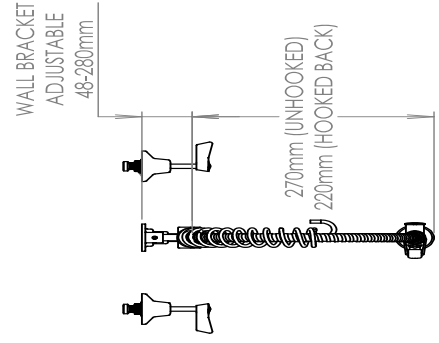

FRONT View

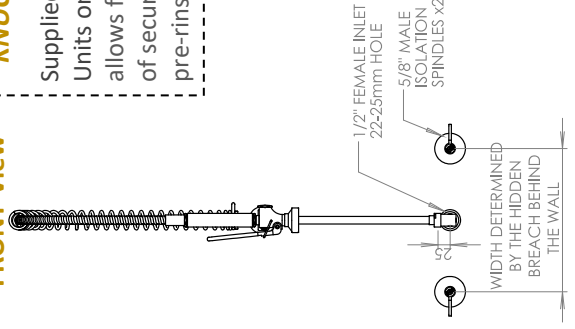

“KNUCKLE” - Sold separately Pt. no. G83KL

Supplied with all ‘RO’ Units only. The “Knuckle” allows for variable angles of secure fastening of the pre-rinses to wall.



Technical: -
Aust. Standards.
“LEAD FREE”

: Watermarked
Lic. 23008

: TM41499

: WELS Reg. No.

: 1sts Outlet Spray Gun:

: WELS Rated

: Flow Rate

: Mounting Hole

: All Metal Material

: Working Press.

: Max. Press. Rate

: Operating Temp

: 6 Stars

: 4.5 lpm

: 25mm

: Polished 304 S/S

: 500kpa. (NPC)

: 1500kpa.

: 1 - 80° C.



'Global Fisher™'

GLOBAL Exposed Adjustable Breach - STRAIGHT WALL Pre-Rinse - STANDARD

TAPWARE

Made from 304 STAINLESS STEEL = Lead Free (LF)

Global Tapware Pty Ltd
E – info.tech@globaltapware.com
P – 07 38 55 2350
P – 1300 85 25 15
W- GLOBALTAPWARE.COM.AU

Tall

Adjustable

Midi

Cafe

NEW Height Adjustable Pre-Rinse for when shelves get in the way

SPRAY GUN INTERCHANGABLE SPRAY TIPS

Flat Fan / Chisel. (FITTED)

Centre Shower

RO Water Tip - Low Atomized Shower

1

2

3

4

5

6

TALL

TALL - Adjustable

MIDI

Café

Pt. No. GF142100AB

Pt. No. GF142100AB-A

Pt. No. GF142100AB-M

Pt. No. GF142100AB-C

WARRANTY: 36 months from Install date.

AS3718 WaterMark Certificate No. 23008 Global Tapware Pty Ltd

WATER RATING 4.5 litres per minute (spray up)

1. DROP N LOCK = fast assembly

2. Adjustable Wall Bracket.

3. Repair Kits AVAILABLE

4. S/S Super Tuff Armour-flex w- 1/2" fi Swivel ends

5. Australia's first Water Saving Spray Gun & still the MOST Reliable on Market.



6. Adjustable Height Spring Retainer. The First in the World. Designed & Made in Australia by GT.

NOTE: All Parts are Replaceable Nationally via Plumbing Stores


Exposed Adjustable Breach Tap Feed: – HOT & COLD

TALL


TALL - Adjustable

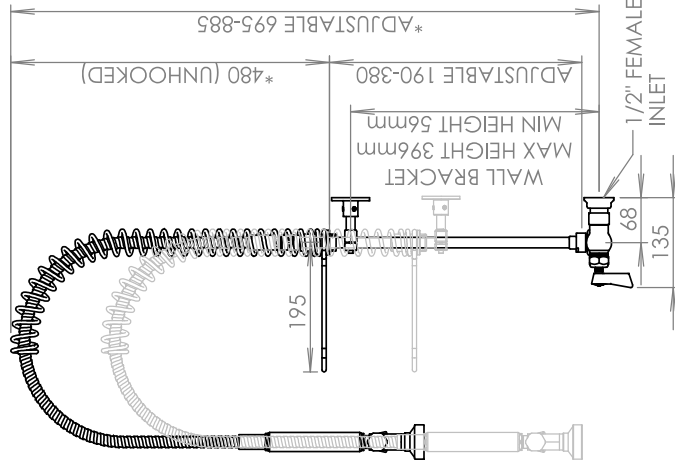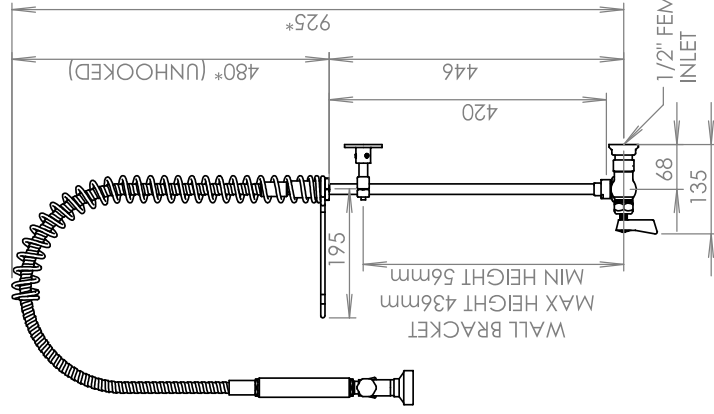

MIDI

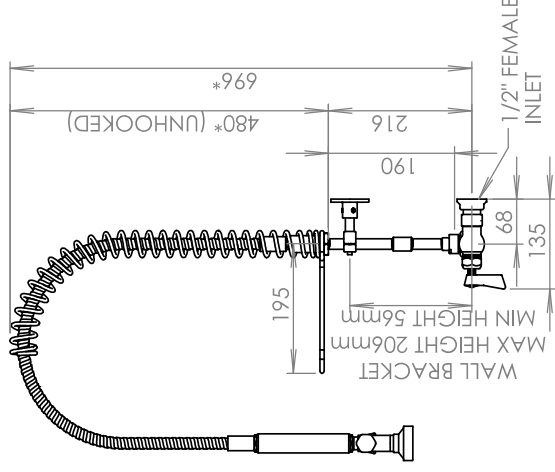


Café / SHORT

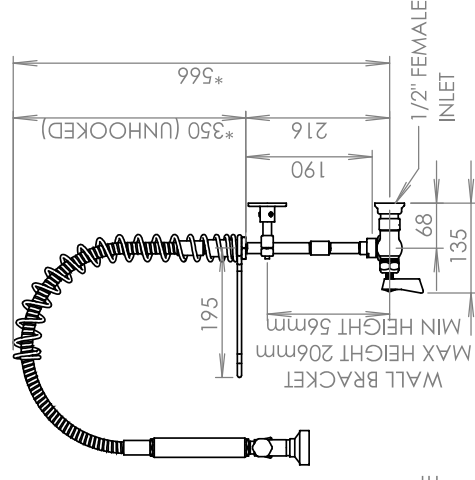


Product must be installed by registered Plumber in accordance with the PCA and AS/NZS3500.


ISOMETRIC View

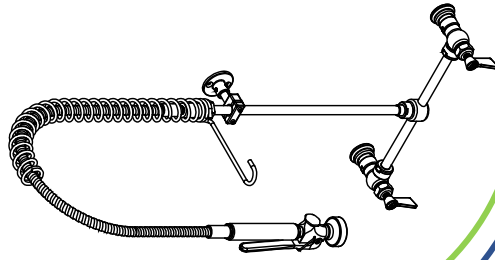

TOP View

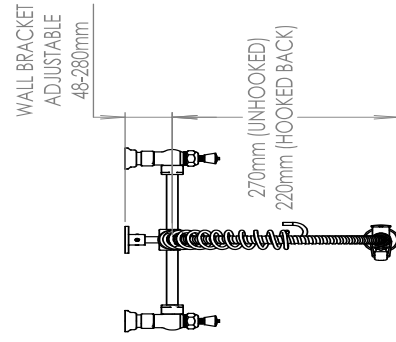

FRONT View

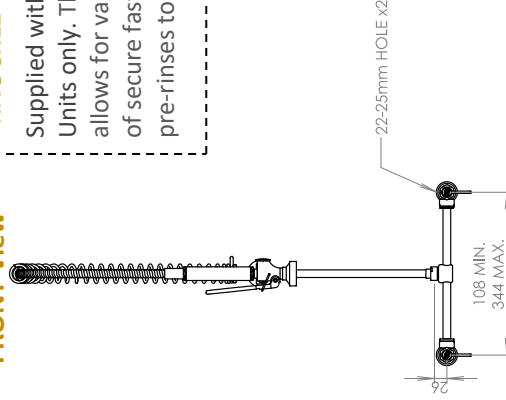

"KNUCKLE" - Sold separately. Pt. no. G83KL

Supplied with all 'RO' Units only. The "Knuckle" allows for variable angles of secure fastening of the pre-rinses to wall.



Technical: -

Aust. Standards.
"LEAD FREE"

: Watermarked
Lic. 23008

WELS Reg. No.
1st Outlet Spray Gun:
WELS Rated
Flow Rate

: T41500


: 6 Stars

: 4.5 lpm

Mounting Hole
All Metal Material
Working Press.
Max. Press. Rate
Operating Temp

: 25mm x 2
: Polished 304 S/S
: 500kpa. (NPC)
: 1500kpa.
: 1 - 80° C.


Made from 304 STAINLESS STEEL = Lead Free (LF)

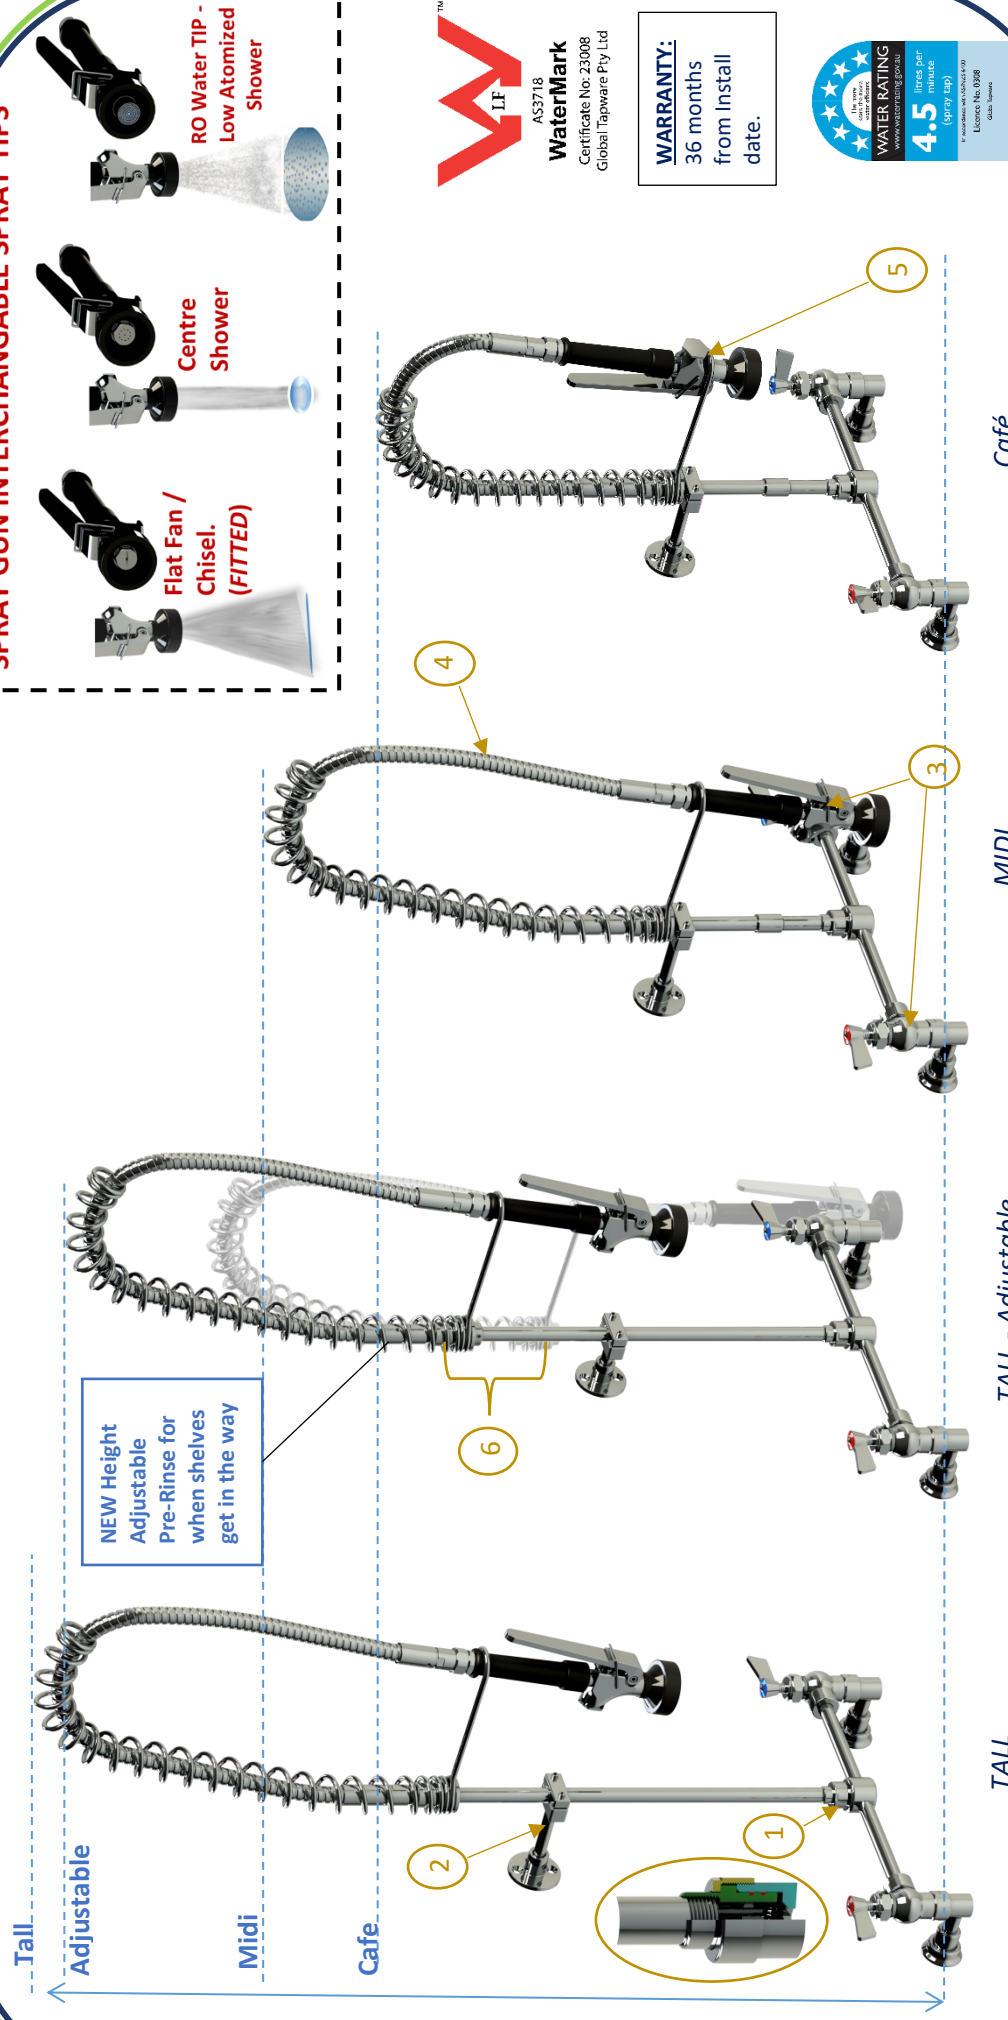


NOTE: All Parts are Replaceable Nationally via Plumbing Stores

Exposed Adjustable Breach Tap Feed: -- HOT & COLD


TALL

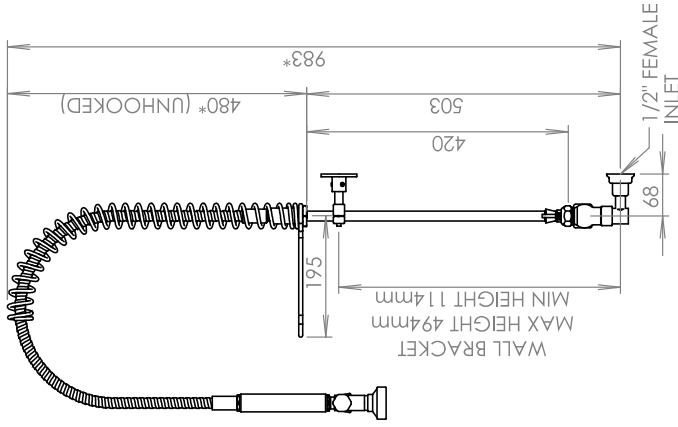


TALL - Adjustable

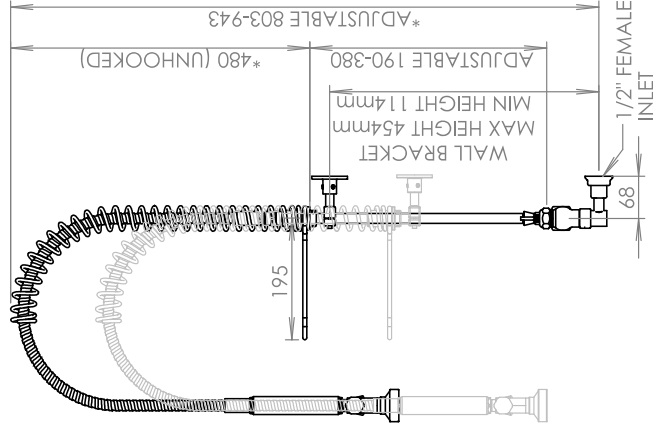

MIDI

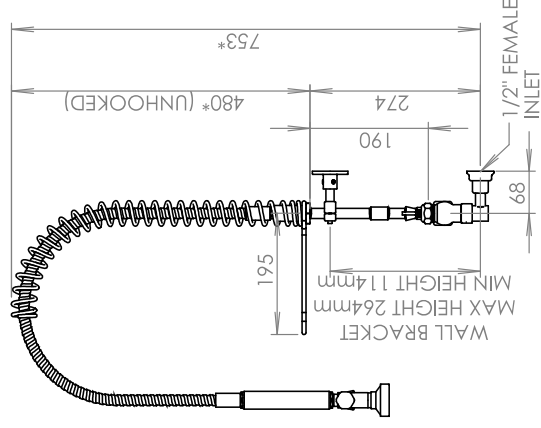


SHORT - Café

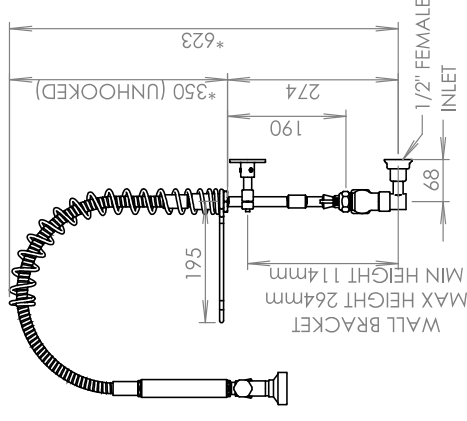


Product must be installed by registered Plumber in accordance with the PCA and AS/NZS3500.


ISOMETRIC View

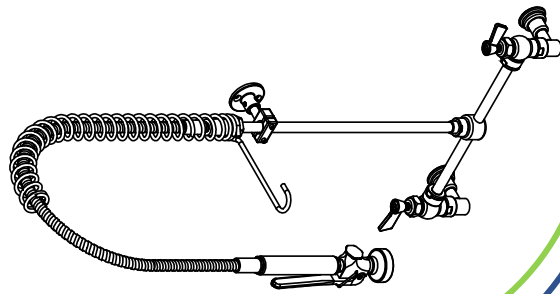

TOP View

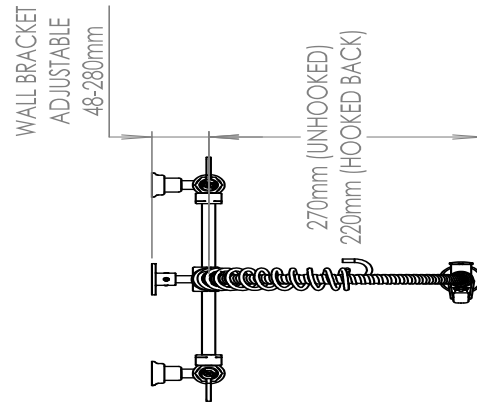

FRONT View

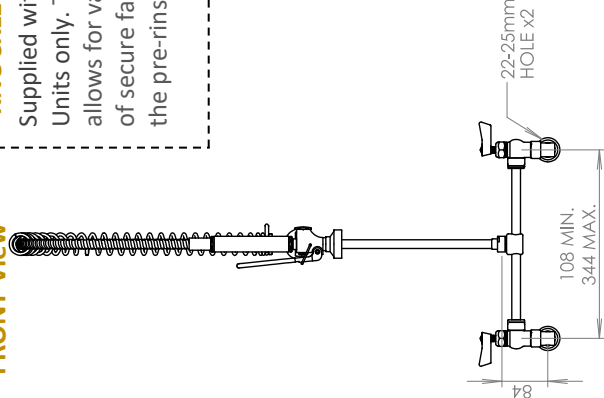

"KNUCKLE" - Sold separately. Pt. no. **G83KL**

Supplied with all 'RO' Units only. The "Knuckle" allows for variable angles of secure fastening of the pre-rinses to wall.



Technical: -

Aust. Standards.
"LEAD FREE"

: Watermarked
Lic. 23008

WELS Reg. No.
1sts Outlet Spray Gun:

WELS Rated
Flow Rate

: 6 Stars
: 4.5 lpm


Mounting Hole
All Metal Material
Working Press.
Max. Press. Rate
Operating Temp

: 25mm x 2
: Polished 304 S/S
: 500kpa. (NPC)
: 1500kpa.
: 1 - 80° C.

Made from 304 STAINLESS STEEL = Lead Free (LF)


*RO Units – See Separate brochure

Tall

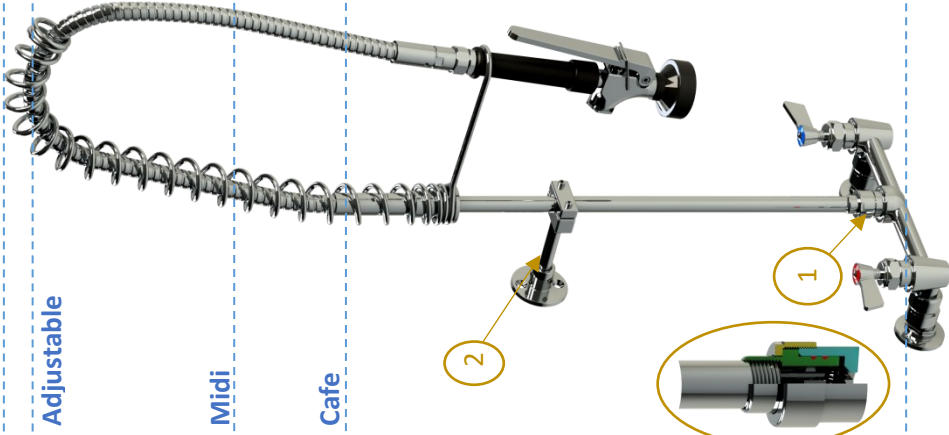


Pt. No. GF152100

TALL - Adjustable

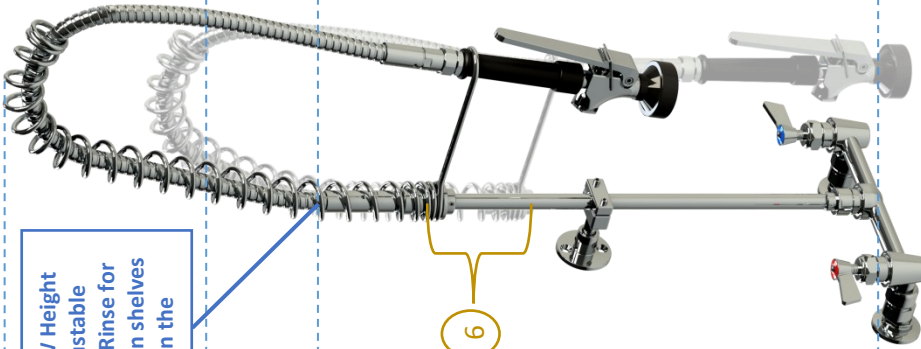


Pt. No. GF152100-A

MIDI

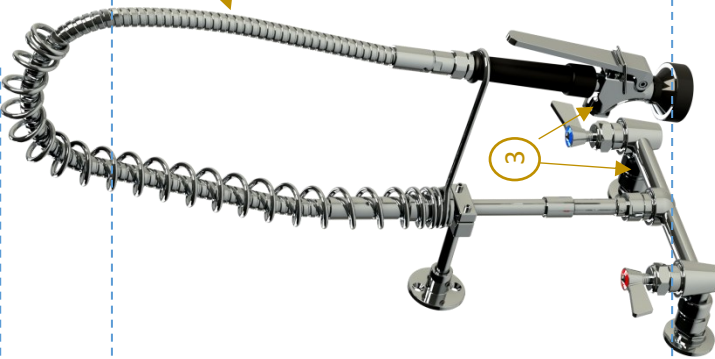

Pt. No. GF152100-M

Café

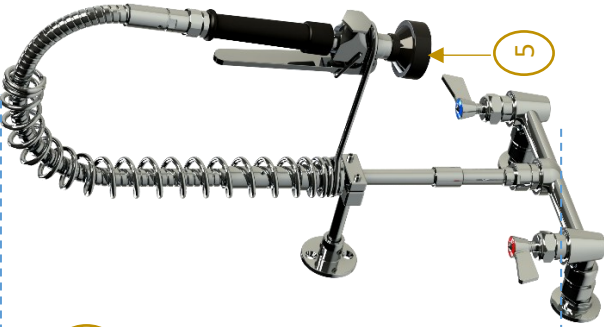

Pt. No. GF152100-C

SPRAY GUN INTERCHANGABLE SPRAY TIPS



Flat Fan / Chisel. (FITTED)



Centre Shower



RO Water TIP - Low Atomized Shower



WaterMark
AS3718
Certificate No: 23008
Global Tapware Pty Ltd

WARRANTY:
36 months from Install date.







1. DROP N LOCK = fast assembly
2. Adjustable Wall Bracket.
3. Repair Kits AVAILABLE
4. S/S Super Tuff Armour-flex w- 1/2" fi Swivel ends
5. Australia's first Water Saving Spray Gun & still the MOST Reliable on Market.
6. Adjustable Height Spring Retainer. The First in the World. Designed & Made in Australia by GT.

NOTE: All Parts are Replaceable Nationally via Plumbing Stores


Exposed Breach WALL Tap Feed: – HOT & COLD

TALL - Adjustable

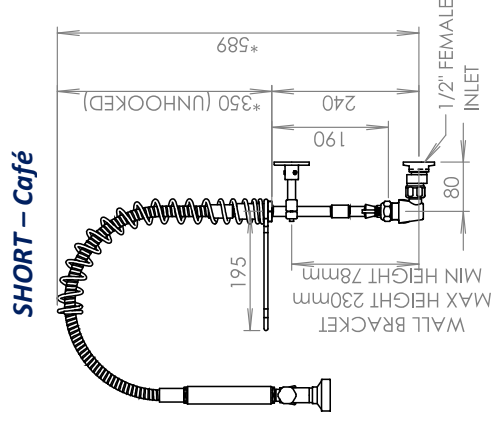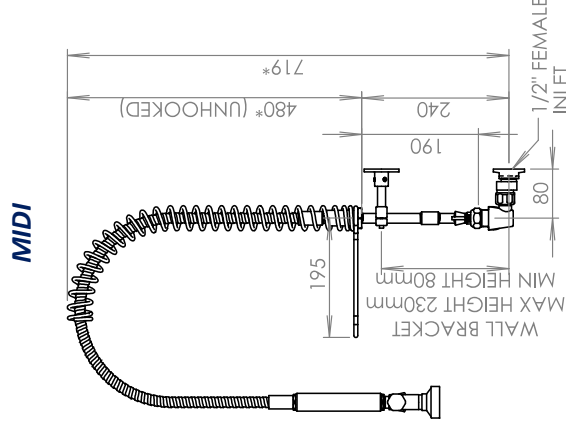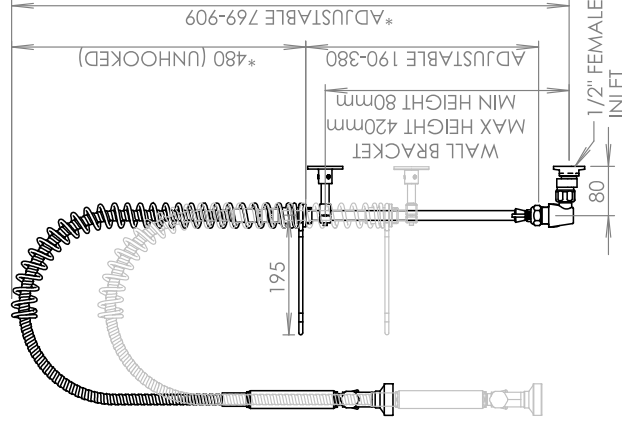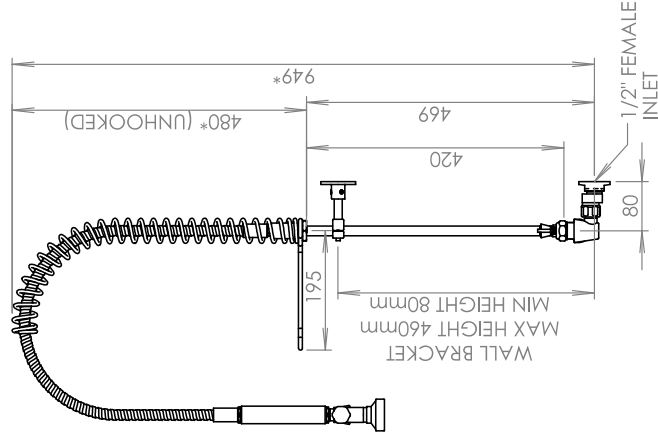


Product must be installed by registered Plumber in accordance with the PCA and AS/NZS3500.


ISOMETRIC View

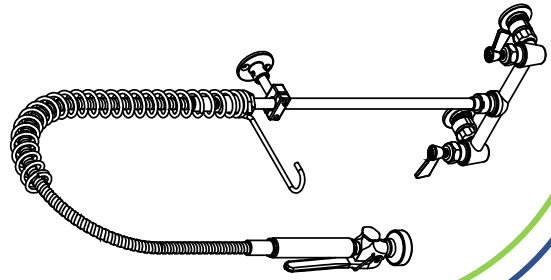

TOP View

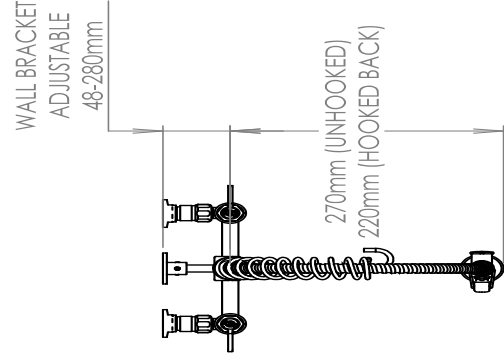

FRONT View

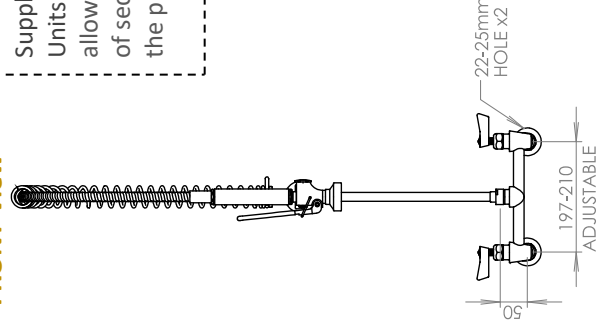

“KNUCKLE” -Sold separately. Pt. no. G83KL

Supplied with all ‘RO’ Units only. The “Knuckle” allows for variable angles of secure fastening of the pre-rinses to wall.



Technical: -

Aust. Standards.
“LEAD FREE”

: Watermarked
Lic. 23008

: TM41500

WELS Reg. No.
1sts Outlet Spray Gun:
WELS Rated
Flow Rate

: 6 Stars
: 4.5 lpm

Mounting Hole
All Metal Material
Working Press.
Max. Press. Rate
Operating Temp

: 25mm x 2
: Polished 304 S/S
: 500kpa. (NPC)
: 1500kpa.
: 1 - 80° C.

'Global Fisher™' Exp. Breach WALL Pre-Rinses - Standard

For use with RO Water & FOOD Prep

Pt. No. – **GF152100-SS**

The '**KNUCKLE**' Allows Adjustable Wall Bracketing. Supplied w- RO PR taps for height adjustable sinks.



Key Features

- **Premium Material:** Constructed from polished 304 stainless steel (S/S).
- **Inner Tube of Pre-Rinse Hose:** Santoprene rubber with S/S Braid cover and another Protective outer S/S Spiral Sheath.
- **Watermarked PR HOSE:** Separately Tested & passed to AS4020 & AS3499.
- **Safety & Convenience:** Squeeze lever with lock-on and quick-release shut-off (OH&S feature).
- **Riser Sub-Assembly:** Made & tested in our Brisbane Factory.
- **Wall Bracket:** Was Designed & Made Specifically for Height Adjustable Sink Tables in mind.
- **Soft Spray Tip:** From End-User feed-back we Redesigned & made this current **Soft Spray Tip** specifically for minimizing the **Atomization of over spray** to the lowest amount possible.
- **Food Prep:** This Spray Tip can also be used in Food preparation areas to avoid bruising.
- **Interchangeable tips:** Other types of tips are available – see back page.

Warranty

- **Commercial Use:** 36 months

Technical: -

Australian Standards	: Watermarked Lic. 23008
WELS Reg. No.	TM41500
1sts Outlet	Spray Gun – Flat Fan Tip
WELS Rated	: 6 Stars
Flow Rate	: 4.5 lpm
Tap Mounting Hole	: 25mm x 2
Material	: 304 S/S
Tap Finish	: Polished S/S
Working Press.	: 500kpa. (NPC)
Max. Press. rate	: 1500kpa.
Tap Operating Temp	: 1 - 80° C.

Global Tapware Pty Ltd

E – info.tech@globaltapware.com


P – 07 38 55 2350

P – 1300 85 25 15

W- GLOBALTAPWARE.COM.AU

Product must be installed by registered Plumber in accordance with the PCA and AS/NZS3500.

The **KNUCKLE**. Allows for a fully Adjustable Wall Bracket Mounting System

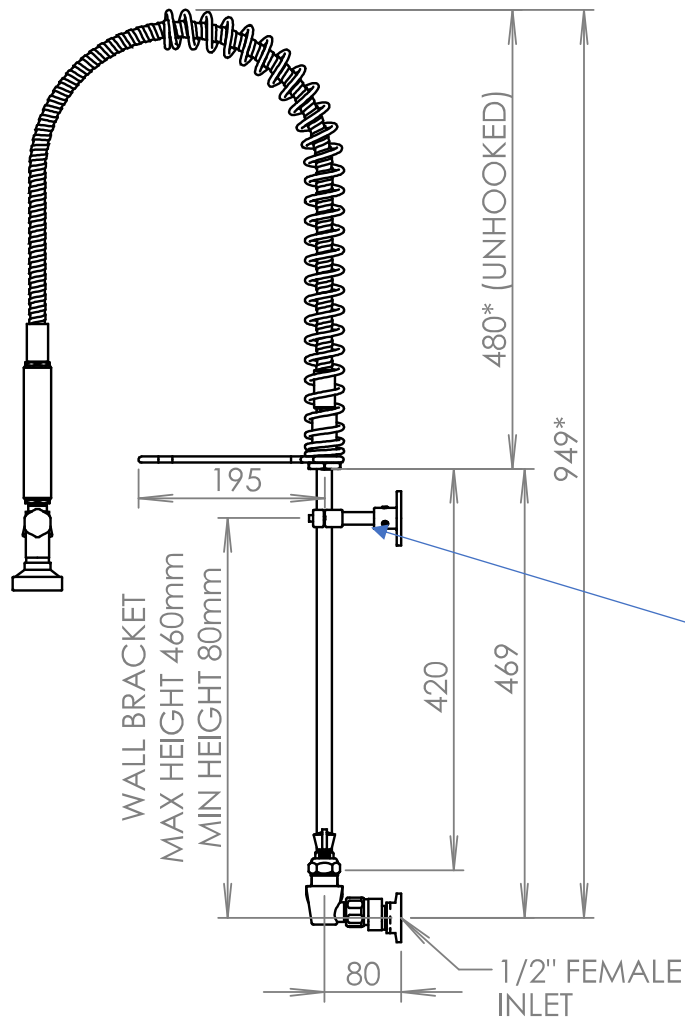

Pt. No. G83KL

Supplied only with these Pre-Rinses but sold separately for others.

Other SPRAY GUN INTERCHANGABLE SPRAY TIPS

Other Spray Tip
Supplied:
FLAT FAN



Other Spray Tip
Supplied:
SHOWER



Tall


Adjustable

Midi


Cafe

NEW Height
Adjustable
Pre-Rinse for
when shelves
get in the way

SPRAY GUN INTERCHANGABLE SPRAY TIPS

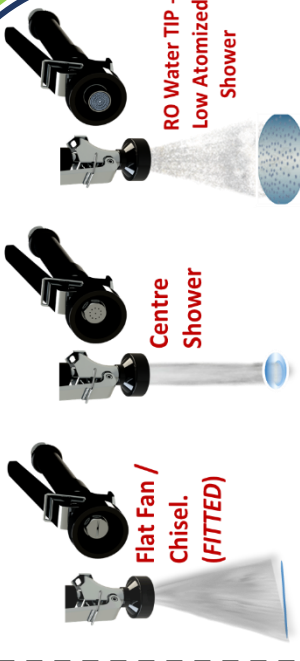

WARRANTY:
36 months
from Install
date.

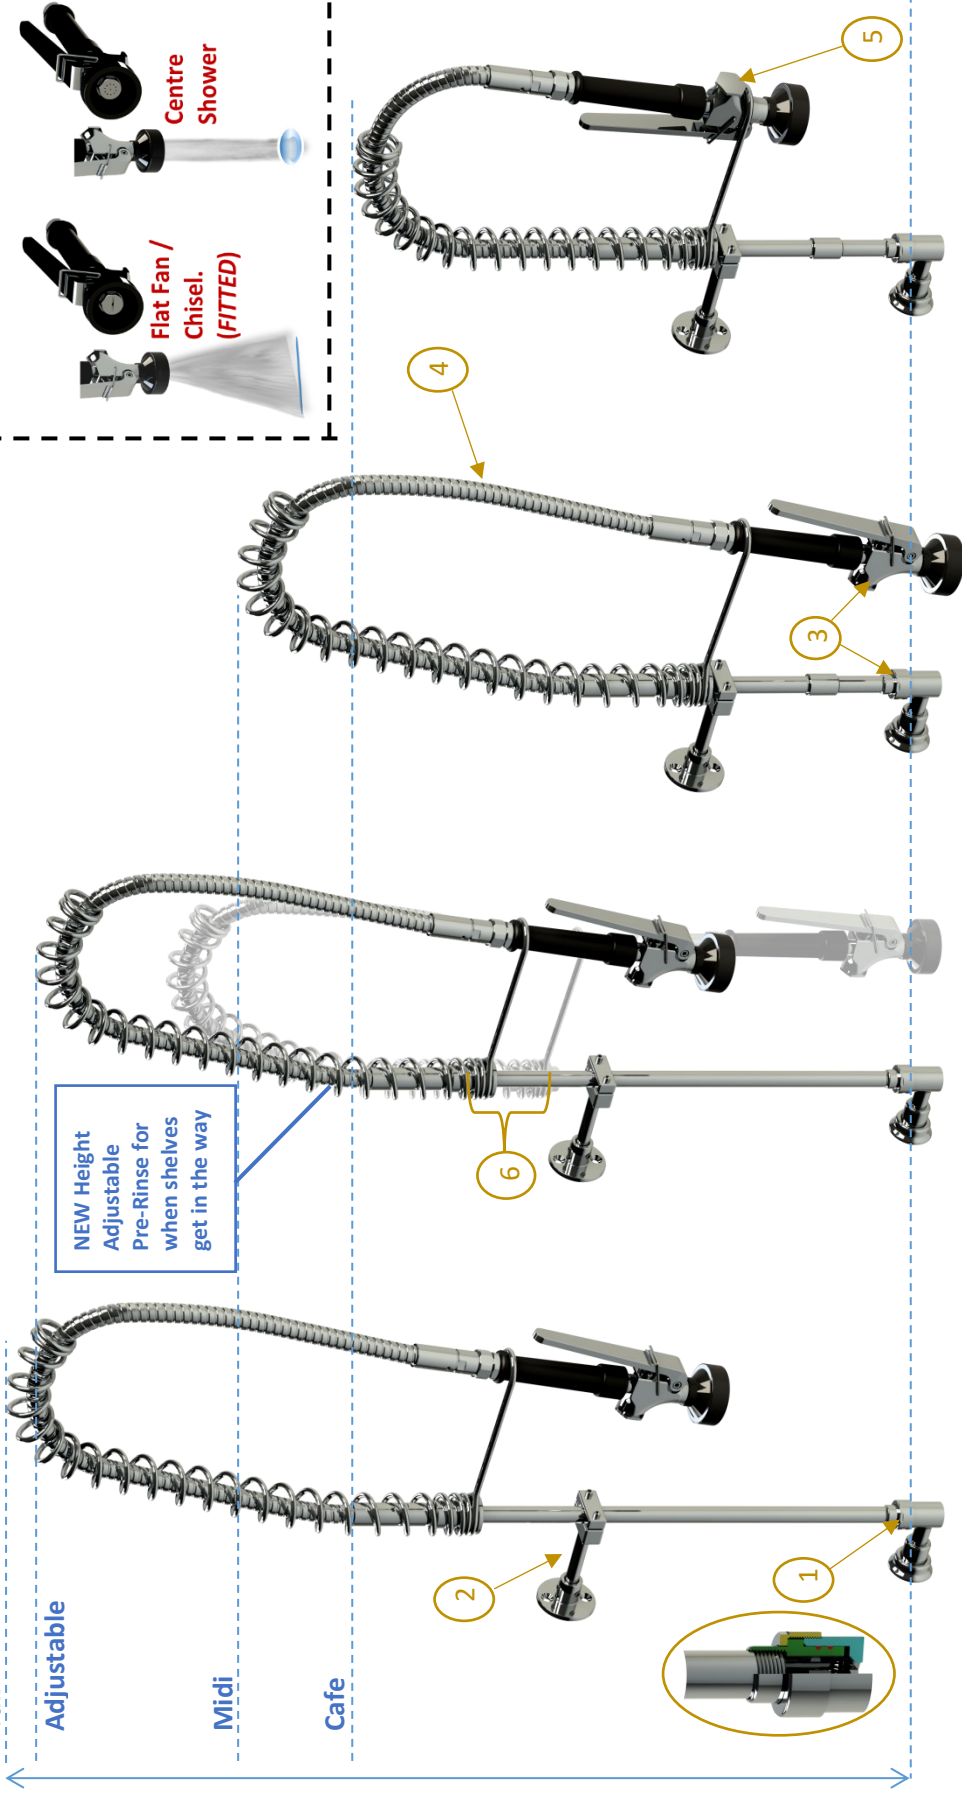

TALL

Pt. No. GF162100

TALL - Adjustable

Pt. No. GF162100-A

MIDI

Pt. No. GF162100-M

Café

Pt. No. GF162100-C

1. DROP N LOCK =
fast assembly

2. Adjustable
Wall Bracket.

3. Repair Kits
AVAILABLE

4. S/S Super Tuff Armour-flex
w- 1/2" fi Swivel ends

5. Australia's first Water Saving
Spray Gun & still the MOST
Reliable on Market.



6. Adjustable Height Spring
Retainer. The First in the World.
Designed & Made in Australia by GT.

NOTE: All Parts are Replaceable Nationally via Plumbing Stores


SINGLE Wall Elbow Only Feed: – HOT or COLD or MIXED

TALL


TALL - Adjustable

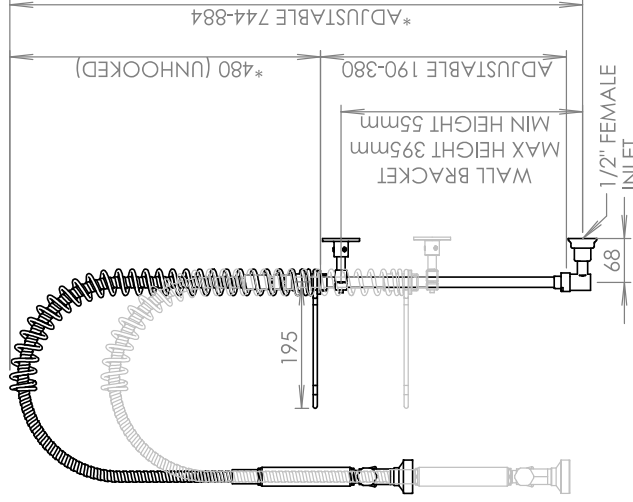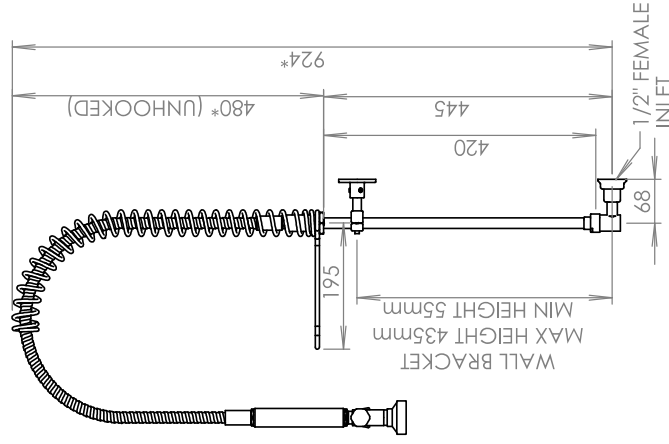

MIDI

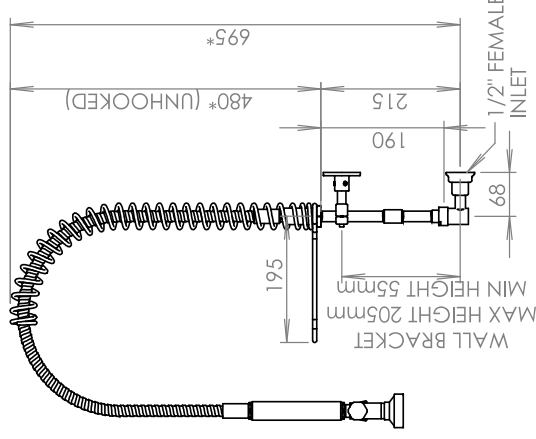


SHORT – Café

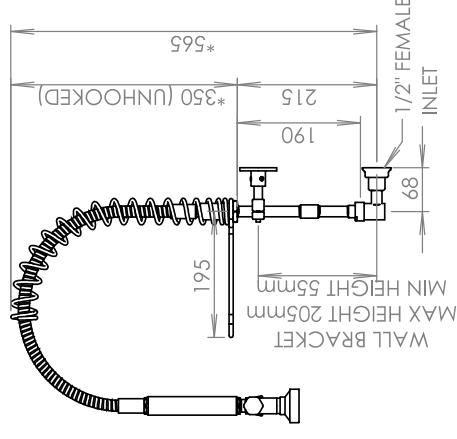


Product must be installed by registered Plumber in accordance with the PCA and AS/NZS3500.


ISOMETRIC View

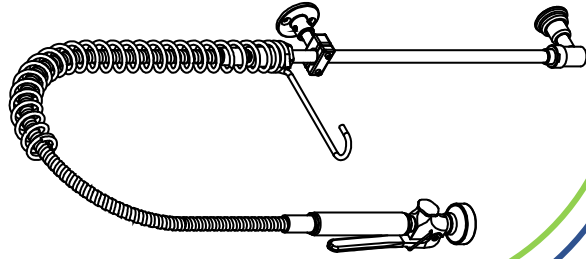

TOP View

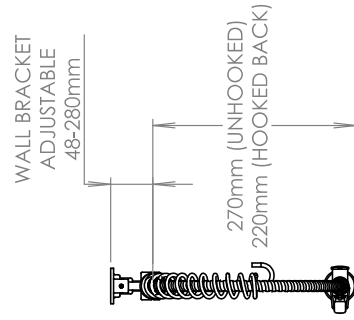

FRONT View

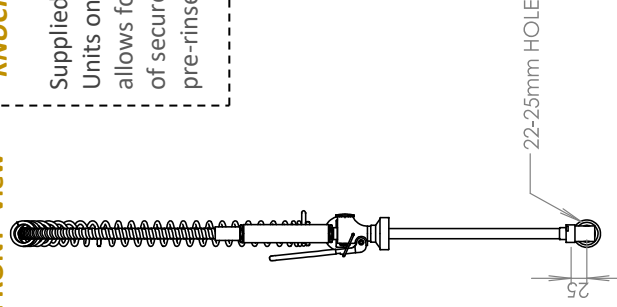

Supplied with all 'RO' Units only. The "Knuckle" allows for variable angles of secure fastening of the pre-rinses to wall.



Technical: -

Aust. Standards.
"LEAD FREE"

: Watermarked
Lic. 23008

WELS Reg. No.
1st Outlet Spray Gun:
WELS Rated
Flow Rate

: TM41501

: 6 Stars

: 4.5 lpm

Mounting Hole

All Metal Material

Working Press.

Max. Press. Rate

Operating Temp

: 25mm

: Polished 304 S/S


: 500kpa. (NPC)

: 1500kpa.

: 1 - 80° C.

Pt. No. **GTKFCWB-PR01**

RRP \$ _____ + GST

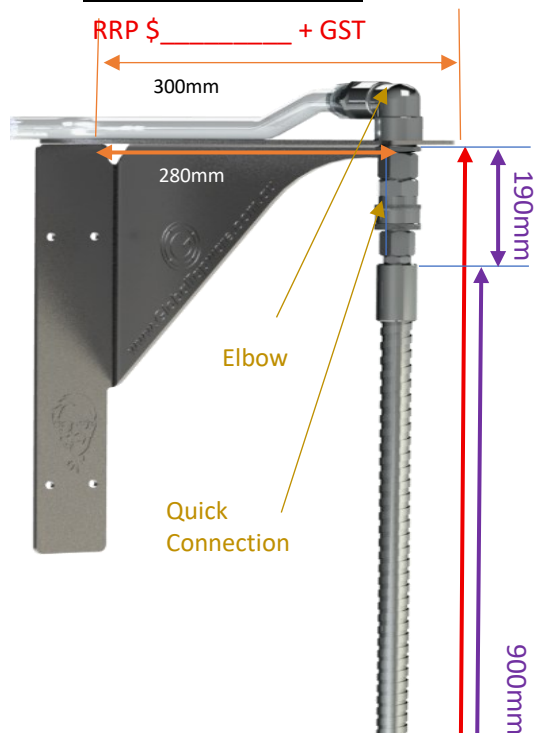

OPTIONAL Hook model...
See below Photo



Bolt on Extension
Piece sold



250m

S/S Spray Gun

Allow min. 35mm Air Gap

The Highest
Point on the
sink

** Measurements
can vary slightly

Features:

- Easy To Install
- Gun Holder / Cradle
- Quick Release Coupling on Hose.
- Super Flexible Hose.
- OH&S Friendly Spray Gun.
- Spare Parts Readily available throughout Australia from any Plumbing store.
- Plumber installs Water Connection to ½" Elbow
- All Parts are 304 S/S

WARRANTY:

- 36 Months for Commercial use

Technical: -

Australian Standards : **Watermarked**

WELS Reg. : **T40480**
WELS Rated : **6 Stars**
Flow Rate : **4.5 lpm**

Mounting : **Wall**
Material : **304 S/S**

Working Press. : **500kpa. (NPC)**
Max. Press. rate : **1500kpa.**
Operating Temp : **1 - 80° C.**

Global Tapware Pty Ltd
E – info.tech@globaltapware.com
P – 07 38 55 2350
P – 1300 85 25 15
W- **GLOBALTAPWARE.COM.AU**



GLOBAL FISHER
Pre-Rinse Set Up for all KFC Stores around Australia

******* Spare Parts List *******

Product Photo	Part No.	Description	Price excl. GST
	G2949HDL12M	S/S Global Fisher Spray Valve & Handle w- Triple Interchangeable spray Tips	\$_____ + GST
	G50BM-BK	Bumper – Black	\$_____ + GST
	G50BM-BLU	Bumper – Blue	\$_____ + GST
	G2949-B	Spray Valve only	\$_____ + GST
	G5208	Spray valve Handle	\$_____ + GST
	G50TST	Triple Spray Tip replacements + Male Core	\$_____ + GST
Opt 1 	Opt 1: GF2914-K	S/S Pre-Rinse Hose. - 900mm - ¼" npt male x ¾uns male	\$_____ + GST
	Opt 2: GF2918A-K	As Above + Handle + Adaptor	
 	GHWBK-KFC-HK + GHWB-EXT	S/S Hanging Bracket with gun holder + Extension Arm	\$_____ + GST
	GQR12COUP-AS-M-CP	Quik Release Coupling w- Auto Shut Off + ½" Male –Chrome.	\$_____ + GST
	GQR12PLUG-M-CP	Quik Release Plug – ½" Male CP	\$_____ + GST
	G531412SS	S/S ¼" x ½" Reducing Socket	\$_____ + GST



GLOBAL TAPWARE

Manufacturers of Quality Commercial Tapware



WWW.GLOBALTAPWARE.COM.AU

P1 - 07 3855 2350

P2 – 1300 85 25 15

E – info.tech@globaltapware.com