

GLOBAL STAINLESS

HOB - DECK MOUNT

ALL SPOUT MODELS



- BROCHURE BOOK -



Models: GS02 / 03 / 04 / 05 / 06 / 07



BROCHURES & Drawings for: *HOB TAPWARE*


PAGE		PRODUCT CODE
		Single Hob Tap
5 - 6		GS02G30--S STANDARD SPOUT
5 - 6		GS02G31--S GOOSENECK SPOUT
5 - 6		GS02G35--S DOUBLE SWIVEL SPOUT – Pot Filler
		DUAL Hob Tap
7 - 8		GS03G30--S STANDARD SPOUT
7 - 8		GS03G31--S GOOSENECK SPOUT
7 - 8		GS03G35--S DOUBLE SWIVEL SPOUT – Pot Filler
		FIXED Exposed Breach Hob Tap
9 - 10		GS04G30--ABS STANDARD SPOUT
9 - 10		GS04G31--ABS GOOSENECK SPOUT
9 - 10		GS04G35--ABS DOUBLE SWIVEL SPOUT – Pot Filler
		Adjustable Exposed Breach HOB Tap
to come		GS05G30-- ABS STANDARD SPOUT
		GS05G31-- ABS GOOSENECK SPOUT
		GS05G35-- ABS DOUBLE SWIVEL SPOUT – Pot Filler
		Outlet Only (No Tap)
		GS06G30--S STANDARD SPOUT
11 - 12		GS06G31--S GOOSENECK SPOUT
11 - 12		GS06G35--S DOUBLE SWIVEL SPOUT – Pot Filler
		Hidden Adjustable Breach HOB Tap
to Come		GS07G30--S STANDARD SPOUT
		GS07G31--S GOOSENECK SPOUT
		GS07G35--S DOUBLE SWIVEL SPOUT – Pot Filler
		Blanks
		Back cover



Manufacturers of Quality Commercial Tapware

FEATURES & BENEFITS

- All Metal Components in contact with water are in 304 Stainless Steel.
- Tough & Reliable construction.
- 36 Month Genuine Warranty.
- Product Brand Name & Manufacturer clearly laser etched / marked on our Tapware, where it can be seen [unlike most competitors].
- All Major Assembled parts are Pressure Tested in our Brisbane factory before being dispatched.
- All critical parts have Repair Kits or Replaceable parts, available from Plumbing retailers around Australia.
- We have recently (2024) designed a new Jumper valve for the Hot & Cold Spindles that can be easily converted from 1 full turn to $\frac{1}{2}$ turn to $\frac{1}{4}$ turn.
- The Dual Hob Tap body is designed to minimise interference with 'Dish Washer' Stacking insert Trays' by being cast with a slight forward curvature. The other benefit to this is that the handles Positions are not being restricted by a close splashback / wall.
- We have designed two (2) new in 2025 TAPWARE that have **ADJUSTABLE BREACHES** for both Hob & Wall Applications. These are designated by a “-AB” at end of product code 9 (this means Adjustable Breach). The other new design is ‘**Triple Soft Spray Spout**’ that is used for Food washing – meats, fish & Salad ingredients, etc – what ever you choose & that you do not want bruising or damage to occur. This is unique to Global Tapware – Shown Below. This is to be release in late 2025.

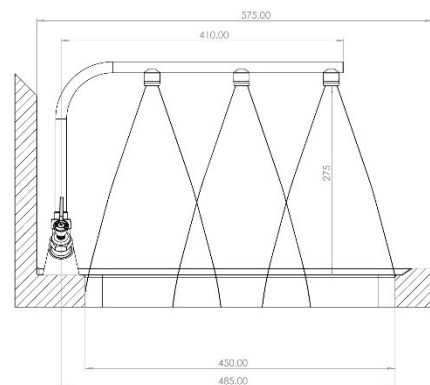



GLOBAL
TAPWARE

'Global STAINLESS' SINGLE HOB Tap – VARIOUS SPOUTS

All parts are **STAINLESS STEEL** = Lead Free

Global Tapware Pty Ltd
E – info.tech@globaltapware.com
P – 07 38 55 2350
P – 1300 85 25 15
W- GLOBALTAPWARE.COM.AU

Keep swivel spout away from direct heat.

End Tap




STANDARD SPOUTS	
Spout Length	Part Number
A 6" Long	GS02G3006S
B 8" Long	GS02G3008S
C 10" Long	GS02G3010S
D 12" Long	GS02G3012S
E 14" Long	GS02G3014S
F 16" Long	GS02G3016S

WELS Reg. T40511
3 Star / 9 lpm



GOOSENECK SPOUTS	
Spout Length	Part Number
A 9" Long	GS02G31-6-9S
B 8" Long	GS02G31-8-12S
C 9" Long	GS02G31-9-12S

WELS Reg. TM42773
4 Star / 7.5 lpm

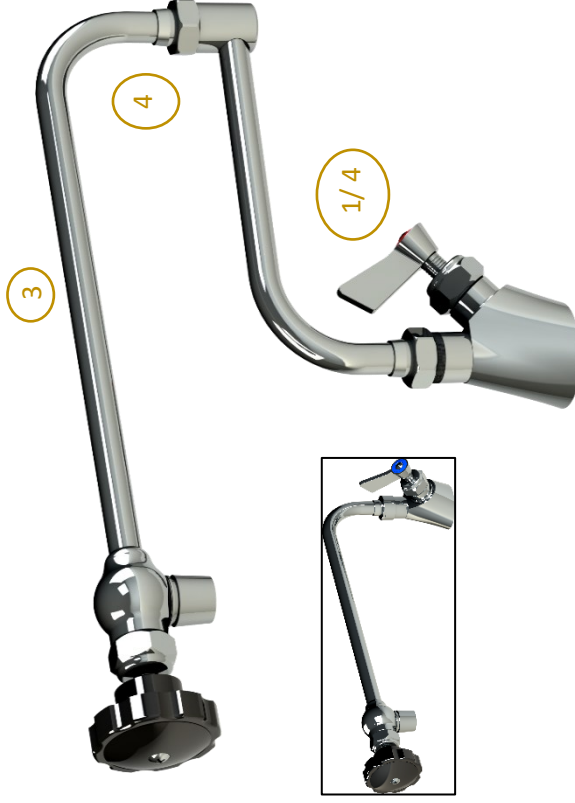

KETTLE / POT SPOUT	
Spout Length	Part Number
A 18" Double Swivel	GS02G3518S
B 24" Double Swivel	GS02G3524S
C 12" Single Swivel	GS02G3511S

WELS Reg. TM41021
3 Star / 9 lpm



NOTE: All Parts are Replaceable Nationally via Plumbing Stores

1. **DROP N LOCK** = Lock Nut + 2 O'Rings

3. Polished S/S Swivel SPOUTS


4. Replaceable O'Rings.

WARRANTY: 36 months from Install date.

**** Australia's first Commercial
Stainless-Steel Tap & still the
MOST Reliable on Market.**



Products must be installed by registered Plumber in accordance with the PCA and AS/NZS3500.

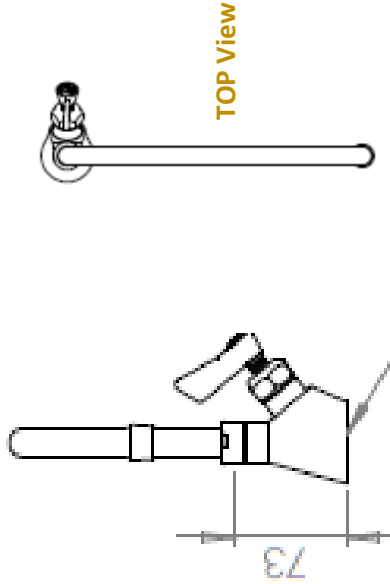


22-25mm Hole suit 1/2" male thread / lock nut

STANDARD SPOUT View

Ref.	ITEM
1	SS CAST BODY
2	POLISHED SS SPOUTS
3	1/2" MOUNTING KIT

SINGLE Tap Feed: – HOT or COLD or MIXED


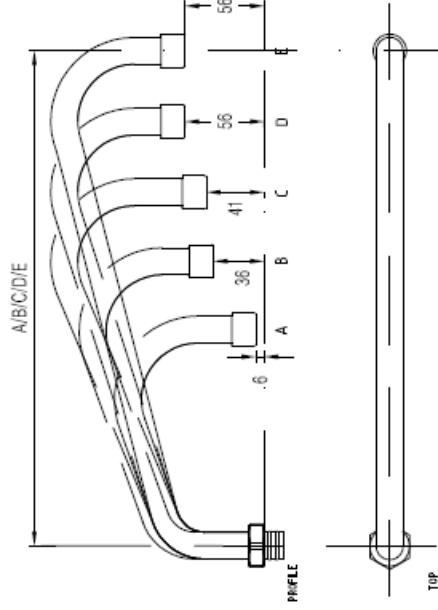


STANDARD SPOUTS	
Pt. No.	LENGTH
A	G3006S 6"/179
B	G3008S 8"/227
C	G3010S 10"/276
D	G3012S 12"/326
E	G3014S 14"/376
F	G3016S 16"/400




KETTLE / POT SPOUTS			
Part No.	A1	A2	1+2
G3524S			23"
G3518S			18"
G3511S	11"		
G3407S		7"	
G3412S		12"	

GOOSENECK SPOUTS				
Part No.	A	B	C	
G31-6-9S	165	108	240	
G31-8-12S	200	150	300	
G31-9-12S	230	135	300	

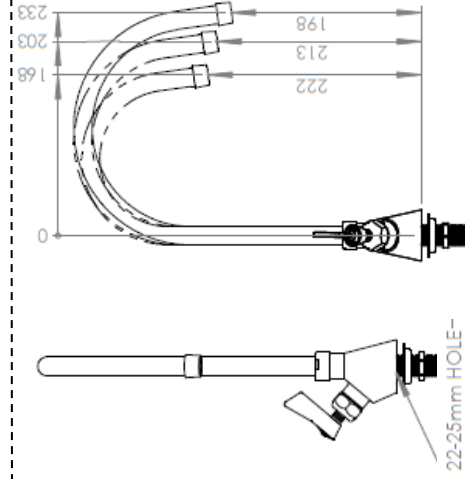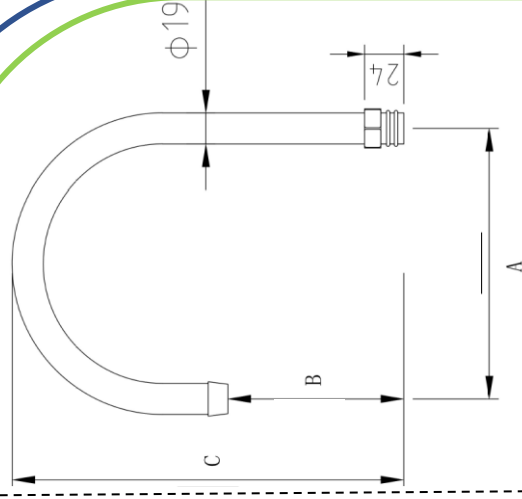

GOOSENECK SPOUT View

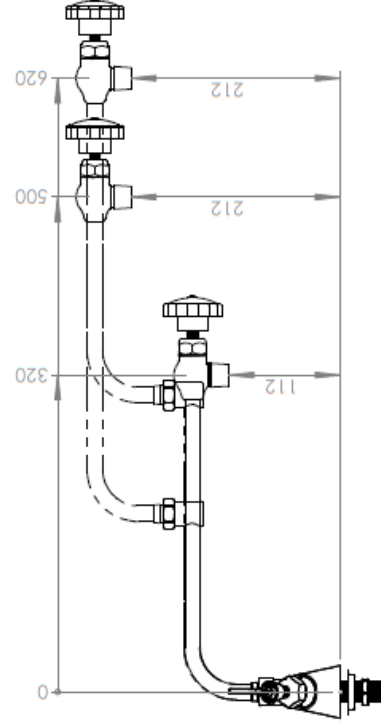

DOUBLE SWIVEL View

Technical: -

Aust. Standards.

:Watermarked
Lic. 23008

Mounting Hole

: 32-35mm

All Meta Material

: 304 Polished S/S

Working Press. :

500kpa. (NPC)

Max. Press. Rate : 1500kpa.

Operating Temp : 1 - 80° C.



GLOBAL
TAPWARE

'Global STAINLESS' SINGLE DUAL HOB Tap – VARIOUS SPOUTS

All parts are **STAINLESS STEEL** = Lead Free


Global Tapware Pty Ltd
E – info.tech@globaltapware.com
P – 07 38 55 2350
P – 1300 85 25 15
W- GLOBALTAPWARE.COM.AU

Products must be installed by
registered Plumber in accordance with the
PCA and AS/NZS3500.



STANDARD SPOUT:	
Spout Length	Part Number
A 6" Long	GS03G3006S
B 8" Long	GS03G3008S
C 10" Long	GS03G3010S
D 12" Long	GS03G3012S
E 14" Long	GS03G3014S
F 16" Long	GS03G3016S

WELS Reg. T40511
3 Star / 9 lpm

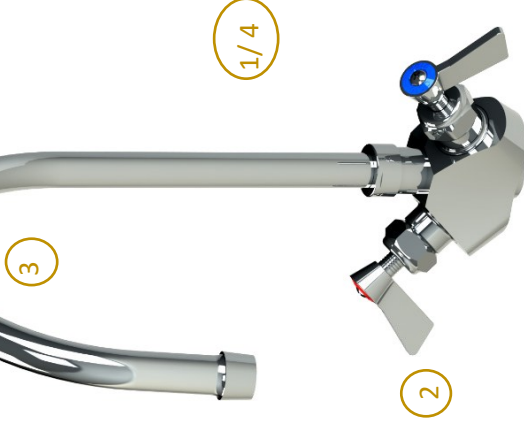

GOOSENECK SPOUTS:	
Spout Length	Part Number
A 6"x 9" Long	GS03G31-6-9S
B 8"x 12" Long	GS03G31-8-12S
C 9"x 12" Long	GS03G31-9-12S

WELS Reg. TM42773
4 Star / 7.5 lpm



KETTLE / POT SPOUT:	
Spout Length	Part Number
A 18" Double Swivel	GS03G3518S
B 18" Double Swivel	GS03G3524S
C 12" Single Swivel	GS03G3512S

WELS Reg. TM41021
3 Star / 9 lpm



NOTE: All Parts are Replaceable Nationally via Plumbing Stores


1. DROP N LOCK = Lock Nut + 2 O'Rings
2. Hot & / or Cold Repair Kits AVAILABLE
3. Polished S/S Swivel SPOUTS
4. Replaceable O'Rings.

WARRANTY: 36 months from Install date.


** Australia's first Commercial
Stainless-Steel Tap & still the
MOST Reliable on Market.



TOP View

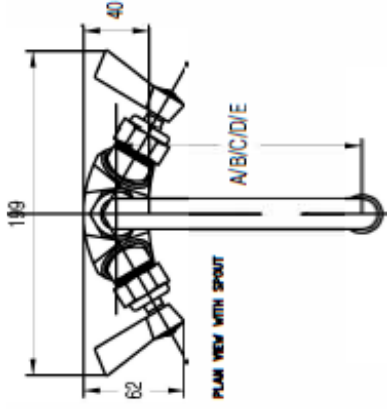


SINGLE DUAL HOB Tap Feed: – HOT & COLD

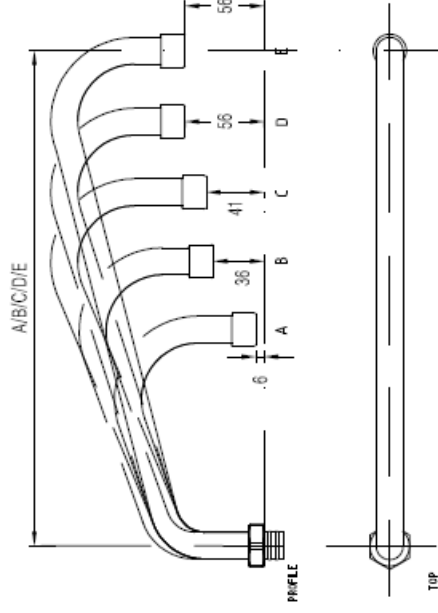

STANDARD SPOUTS		
Pt. No.	LENGTH	
A	G3006S	6"/179
B	G3008S	8"/227
C	G3010S	10"/276
D	G3012S	12"/326
E	G3014S	14"/376
F	G3016S	16"/400


Standard Spout Front View

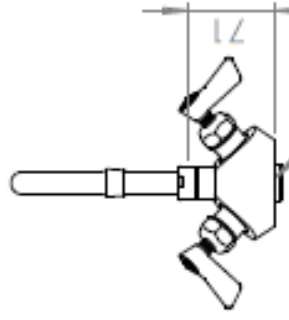


KETTLE / POT SPOUTS			
Part No.	A1	A2	1+2
G3524S			23"
G3518S			18"
G3511S	11"		
G3407S		7"	
G3412S		12"	




Ref.	ITEM
1	SS CAST BODY
2	POLISHED SS SPOUTS
3	2 X Inlet Hoses & S/S MOUNTING KIT

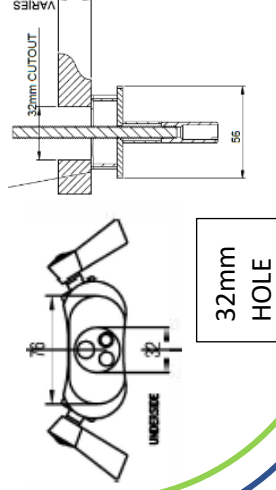


GOOSENECK SPOUT View

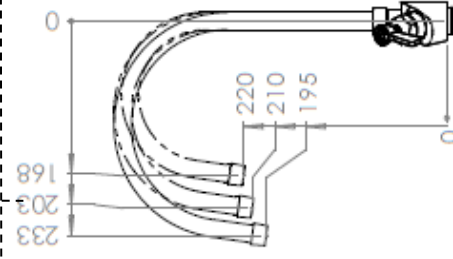

DOUBLE SWIVEL View

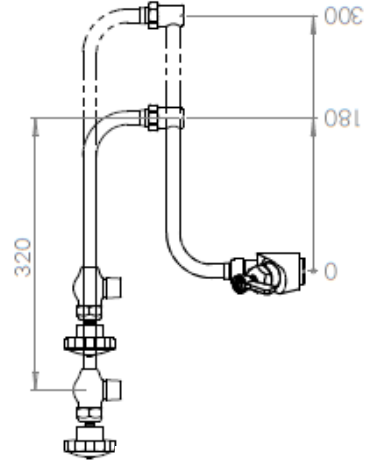

GOOSENECK SPOUTS			
Part No.	A	B	C
G31-6-9S	165	108	240
G31-8-12S	200	150	300
G31-9-12S	230	135	300

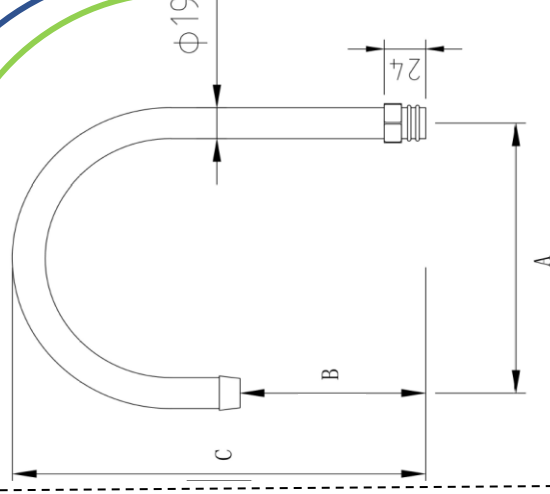

Technical: -

Aust. Standards.

:Watermarked
Lic. 23008

Mounting Hole

: 32-35mm

All Meta Material

: 304 Polished S/S

Working Press. :

500kpa. (NPC)

Max. Press. Rate :

1500kpa.

Operating Temp :

1 - 80° C.




GLOBAL TAPWARE

'Global STAINLESS' EXPOSED BREACH HOB Tap – VARIOUS SPOUTS

All parts are **STAINLESS STEEL** = Lead Free


Global Tapware Pty Ltd
E – info.tech@globaltapware.com
P – 07 38 55 2350
P – 1300 85 25 15
W- GLOBALTAPWARE.COM.AU

Products must be installed by
registered Plumber in accordance with the
PCA and AS/NZS3500.

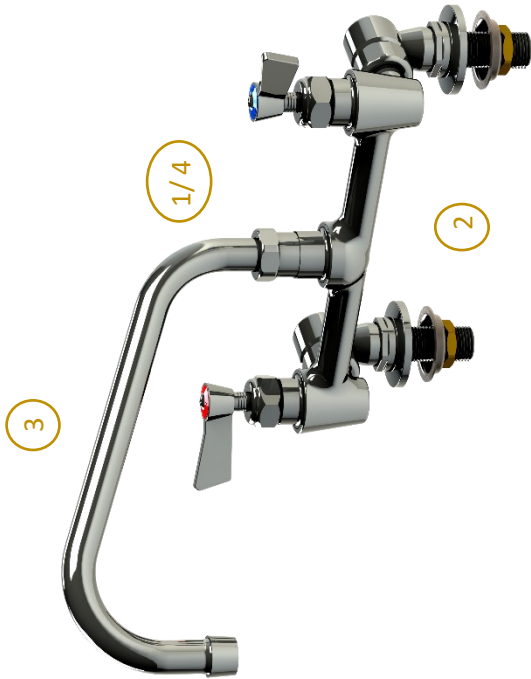

STANDARD SPOUT:	
Spout Length	Part Number
A 6" Long	GS04G3006S
B 8" Long	GS04G3008S
C 10" Long	GS04G3010S
D 12" Long	GS04G3012S
E 14" Long	GS04G3014S
F 16" Long	GS04G3016S

WELS Reg. T40511
3 Star / 9 lpm

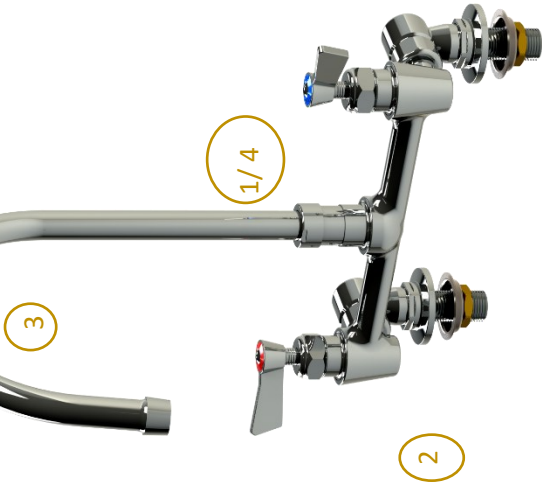

GOOSENECK SPOUTS:	
Spout Length	Part Number
A 6"x 9" Long	GS04G31-6-9S
B 8"x 12" Long	GS04G31-8-12S
C 9"x 12" Long	GS04G31-9-12S

WELS Reg. TM42773
4 Star / 7.5 lpm



Keep swivel spout away from direct heat.

KETTLE / POT SPOUT:	
Spout Length	Part Number
A 18" Double Swivel	GS04G3518S
B 18" Double Swivel	GS04G3524S
C 12" Single Swivel	GS04G3512S

WELS Reg. TM41021
3 Star / 9 lpm




- NOTE:** All Parts are Replaceable Nationally via Plumbing Stores
1. DROP N LOCK = Lock Nut + 2 O'Rings
 - 2 Hot & / or Cold Repair Kits AVAILABLE
 3. Polished S/S Swivel SPOUTS
 4. Replaceable O'Rings.


WARRANTY: 36 months from Install date.
**** Australia's first Commercial Stainless-Steel Tap & still the MOST Reliable on Market.**




TOP View

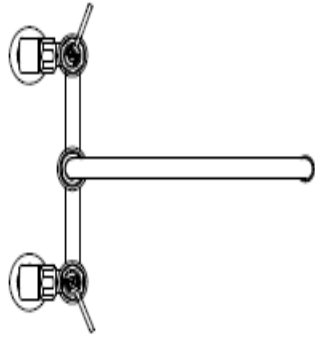

Standard Spout Front View

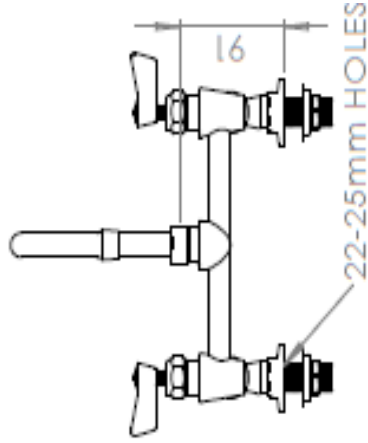

EXPOSED BREACH HOB Tap Feed: – HOT & COLD

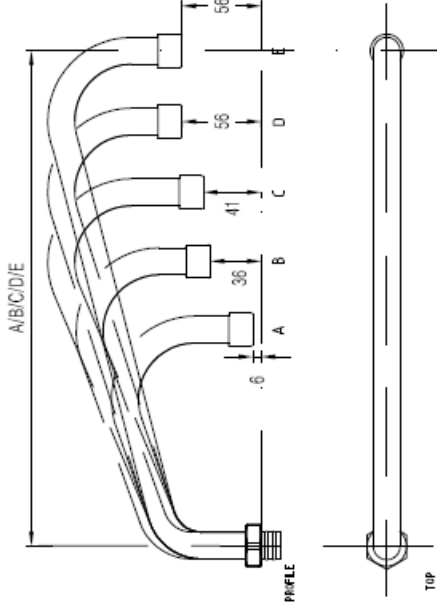


STANDARD SPOUTS		
Pt. No.	LENGTH	
A	G3006S	6"/179
B	G3008S	8"/227
C	G3010S	10"/276
D	G3012S	12"/326
E	G3014S	14"/376
F	G3016S	16"/400


KETTLE / POT SPOUTS			
Part No.	A1	A2	1+2
G3524S			23"
G3518S			18"
G3511S	11"		
G3407S		7"	
G3412S		12"	




GOOSENECK SPOUTS			
Part No.	A	B	C
G31-6-9S	165	108	240
G31-8-12S	200	150	300
G31-9-12S	230	135	300

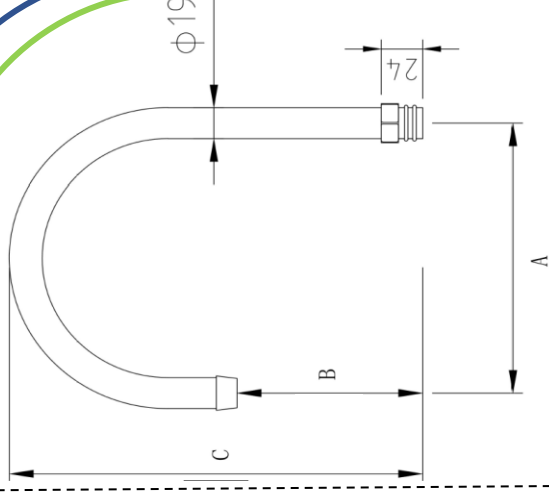

Ref.	ITEM
1	SS CAST BODY
2	POLISHED SS SPOUTS
3	2 X Inlet Hoses & S/S MOUNTING KIT

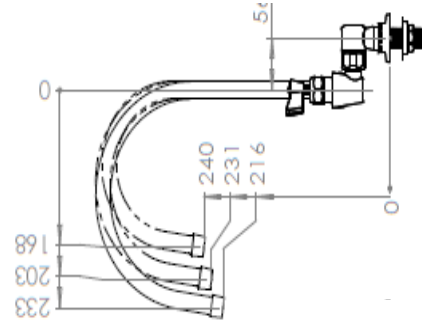

GOOSENECK SPOUT View

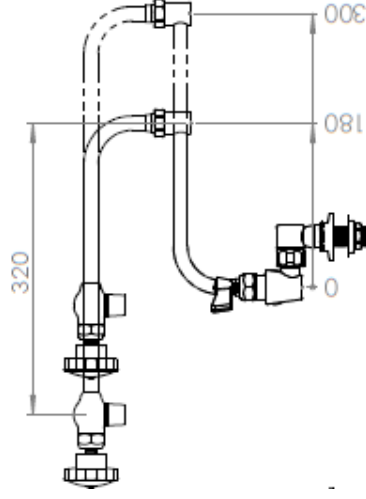

DOUBLE SWIVEL View

Technical: -

Aust. Standards.

Watermarked
Lic. 23008

Mounting Hole

: 32-35mm

All Meta Material

: 304 Polished S/S

Working Press. :

500kpa. (NPC)

Max. Press. Rate : 1500kpa.

Operating Temp : 1 - 80° C.





GLOBAL
TAPWARE


'Global Stainless™'

HOB / DECK OUTLET Only

w- STANDARD & GOOSENECK Swivel Spouts

A range of Standard & Gooseneck Spouts available:

A	B	C	D	E
6"	8"	10"	12"	14"

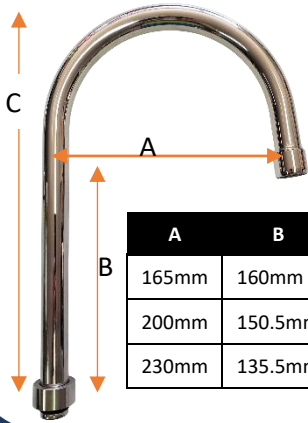

A	B	C	
165mm	160mm	240mm	AA
200mm	150.5mm	300mm	BB
230mm	135.5mm	300mm	CC



STANDARD Spout

A - Pt. No. **GS06G3006S**

B - Pt. No. **GS0263008S**

C - Pt. No. **GS06G3010S**

D - Pt. No. **GS06G3012S**

E - Pt. No. **GS06G3014S**



GOOSENECK Spout

AA - Pt. No. **GS06G31-6-9S**

BB - Pt. No. **GS06G31-8-12S**

CC - Pt. No. **GS06G31-9-12S**

Features:

- All metal Components in contact with water are 304 S/S.
- Suit Hot or Cold water.
- Spring Jumper Valve in Hob Tap.
- A Range of STANDARD Spout Sizes are available.
- A Range of GOOSENECK Spouts are available.
- Spout Service Kits available.
- Tap Repair Kits Available.
- **WATERMARKED & WELS** Registered.

WARRANTY:

- 36 Months for Commercial use.

Technical:-

Australian Standards : **Watermarked**

WELS Reg. : **TM41086**

WELS Rated : **3 Stars**

Flow Rate : **9 lpm**

Mounting Hole : **22 - 25mm**

Material : **304 Stainless**

Finish 1 : **Polished**

Working Press. : **500kpa. (NPC)**

Max. Press. rate : **1500kpa.**

Operating Temp : **1 - 80° C.**



Global Tapware Pty Ltd

E – sales.info@globaltapware.com

P – 07 38 55 2350

P – 1300 85 25 15

W- GLOBALTAPWARE.COM.AU




AS3718


WaterMark

Certificate No: 23008
Global Tapware Pty Ltd

Must be installed in accordance with the requirements of AS/NZS3500

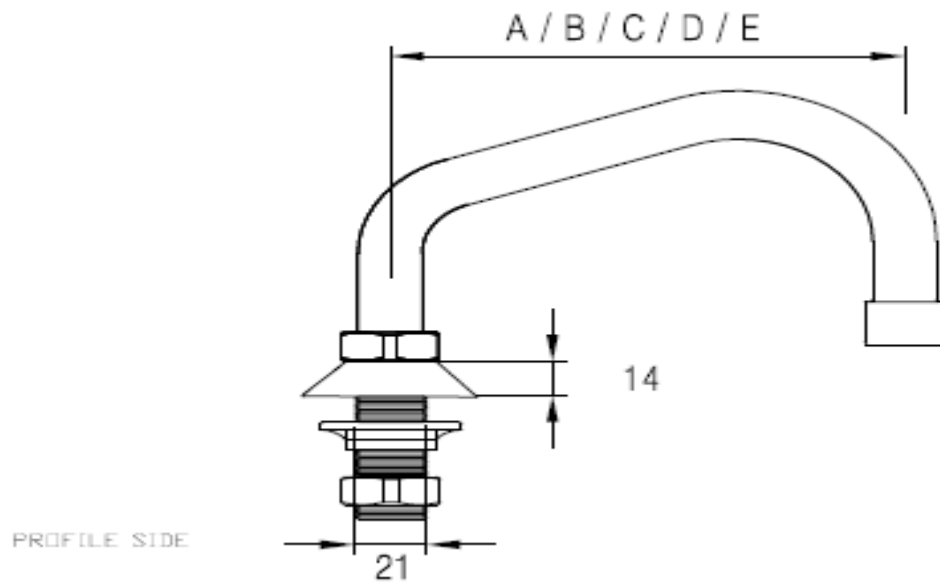

Spout Service Kit



Pt. No. **G-SKIT**



Manufacturers of Quality Commercial Tapware



WWW.GLOBALTAPWARE.COM.AU

P1 - 07 3855 2350

P2 – 1300 85 25 15

E – info.tech@globaltapware.com