



GLOBAL
TAPWARE

GLOBAL STAINLESS

WALL MOUNT

ALL SPOUT MODELS



- BROCHURE BOOK -



Models: GS11 / 13 / 14 / 15 / 16



BROCHURES & Drawings for: WALL TAPWARE


PAGE		PRODUCT CODE
		Single Wall Tap
5 - 6		GS11G30--S STANDARD SPOUT
7 - 8		GS11G31--S GOOSENECK SPOUT
9 - 14		GS11G35--S DOUBLE SWIVEL SPOUT – Pot Filler
		Wall Stops Tap
15 - 16		GS13G30--S STANDARD SPOUT
17 - 18		GS13G31--S GOOSENECK SPOUT
		GS13G35--S DOUBLE SWIVEL SPOUT – Pot Filler
		Straight Adjustable Exposed Breach Wall Tap
19 - 20		GS14G30--ABS STANDARD SPOUT
19 - 20		GS14G31--ABS GOOSENECK SPOUT
No Data		GS14G35--ABS DOUBLE SWIVEL SPOUT – Pot Filler
		Elbow Adjustable Exposed Breach Wall Tap
19 - 20		GS15G30-- ABS STANDARD SPOUT
19 - 20		GS15G31-- ABS GOOSENECK SPOUT
No Data		GS15G35-- ABS DOUBLE SWIVEL SPOUT – Pot Filler
		Adjustable Fixed Breach Wall Tap
21 - 22		GS15G30--S STANDARD SPOUT
23 - 24		GS15G31--S GOOSENECK SPOUT
25 - 26		GS15G35--S DOUBLE SWIVEL SPOUT – Pot Filler
27 - 28		GS15G3006S-CS 6" STANDARD SPOUT- Cleaners Sink
		Elbow Outlet Only (No Tap)
29 - 30		GS61G30--S STANDARD SPOUT
29 - 30		GS16G31--S GOOSENECK SPOUT
29 - 30		GS16G35--S DOUBLE SWIVEL SPOUT – Pot Filler
		Blanks
		Back cover



Manufacturers of Quality Commercial Tapware

FEATURES & BENEFITS

- All Metal Components in contact with water are in 304 Stainless Steel.
- Tough & Reliable construction.
- 36 Month Genuine Warranty.
- Product Brand Name & Manufacturer clearly laser etched / marked on our Tapware, where it can be seen [unlike most competitors].
- All Major Assembled parts are Pressure Tested in our Brisbane factory before being dispatched.
- All critical parts have Repair Kits or Replaceable parts, available from Plumbing retailers around Australia.
- We have recently (2024) designed a new Jumper valve for the Hot & Cold Spindles that can be easily converted from 1 full turn to $\frac{1}{2}$ turn to $\frac{1}{4}$ turn.
- The Dual Hob Tap body is designed to minimise interference with 'Dish Washer' Stacking insert Trays' by being cast with a slight forward curvature. The other benefit to this is that the handles Positions are not being restricted by a close splashback / wall.
- We have designed two (2) new in 2025 TAPWARE that have **ADJUSTABLE BREACHES** for both Hob & Wall Applications. These are designated by a “-AB” at end of product code 9 (this means Adjustable Breach). The other new design is ‘**Triple Soft Spray Spout**’ that is used for Food washing – meats, fish & Salad ingredients, etc – what ever you choose & that you do not want bruising or damage to occur. This is unique to Global Tapware – Shown Below. This is to be release in late 2025.

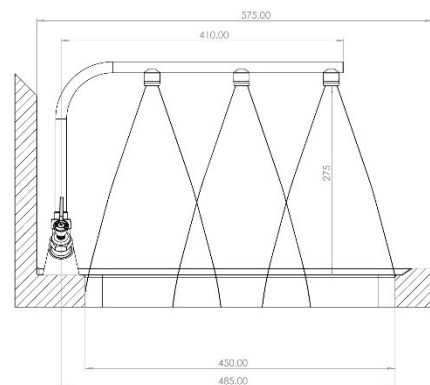

'Global Stainless™' SINGLE WALL TAP w- STANDARD Swivel Spout

Also Available with a
RANGE of SWIVEL Spouts:

A	B	C	D	E
6"	8"	10"	12"	14"



5 sizes of
Gooseneck Spouts
also Available



14" Spout Pt. No.: - **GS11G3014S**

12" Spout Pt. No.: - **GS11G3012S**

10" Spout Pt. No.: - **GS11G3010S**

8" Spout Pt. No.: - **GS11G3008S**

6" Spout Pt. No.: - **GS11G3006S**

Features:

- All metal Components in contact with water are 304 S/S.
- Suit Hot or Cold water.
- Spring Jumper Valve in Hob Tap.
- A Range of STANDARD Spout Sizes are available.
- A Range of GOOSENECK Spouts are available.
- Spout Service Kits available.
- Tap Repair Kits Available.
- **WATERMARKED & WELS** Registered.

WARRANTY:

- 36 Months for Commercial use.

Technical:-

Australian Standards : **Watermarked**

WELS Reg. : **TM41087**

WELS Rated : **3 Stars**

Flow Rate : **9 lpm**

Mounting Hole : **22 - 25mm**

Material : **304 Stainless**

Finish 1 : **Polished**

Working Press. : **500kpa. (NPC)**

Max. Press. rate : **1500kpa.**


Operating Temp : **1 - 80° C.**



Global Tapware Pty Ltd
E – info.tech@globaltapware.com
P – 07 38 55 2350
P – 1300 85 25 15
W- **GLOBALTAPWARE.COM.AU**



Product must be installed by registered Plumber in accordance with the PCA and AS/NZS3500.

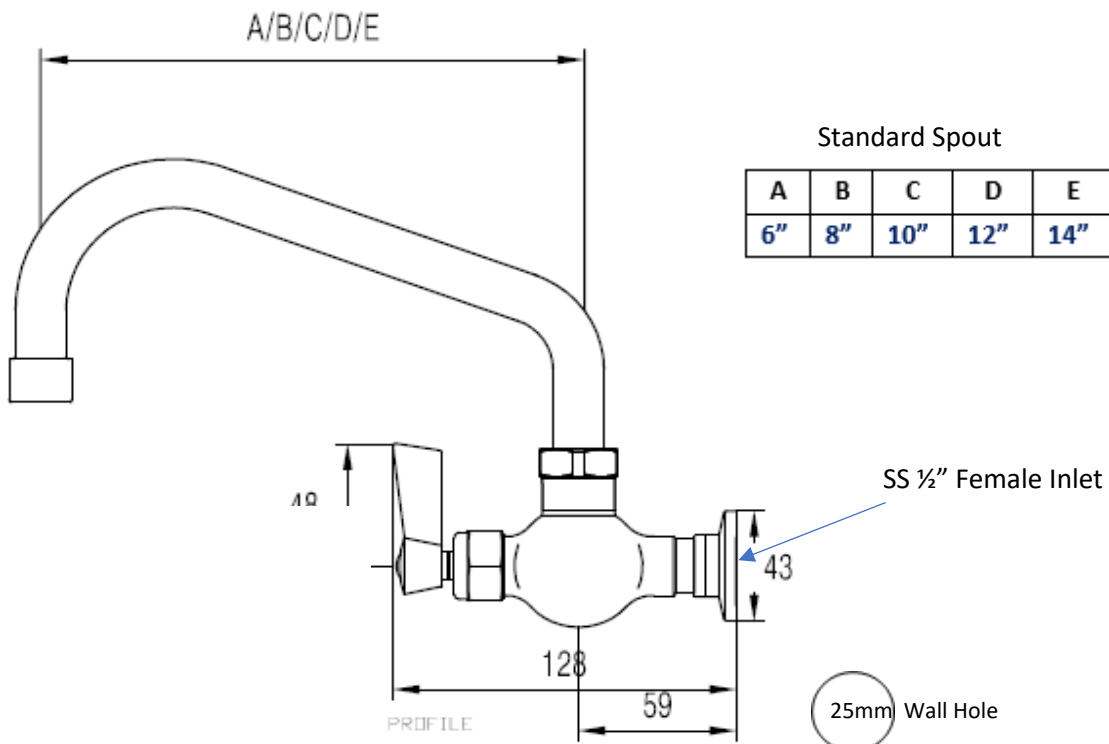

Only one size **Paddle Lever** is available - 100mm
All handles on these S/S Taps are a chrome plated cast alloy and may have issue if exposed to some aggressive environments. Replacements available



CROSS HANDLE is available - .
All handles on these S/S Taps are a chrome plated cast alloy and may have issue if exposed to some aggressive environments. Replacements available

Spout Service Kit



Pt. No. **G-SKIT**

SINGLE Wall Tap Service Kit



HOT Pt. No. **GS03RKH-SS**



Pt. No. **GS11G31-6-9S**



GS11G31-8-12S




GS11G31-9-12S

Features:

- Tap suits Hot, Cold or Tempered or R.O. Water
- DUAL FEED INLET
- Spring Jumper Valve Tap.
- Three Sizes Of Polished Stainless Steel Swivel GOOSENECK Spouts
- Height Extension Piece available
- Spout Service Kits available
- Tap Repair Kits Available

WARRANTY:

- 36 Months for Commercial use

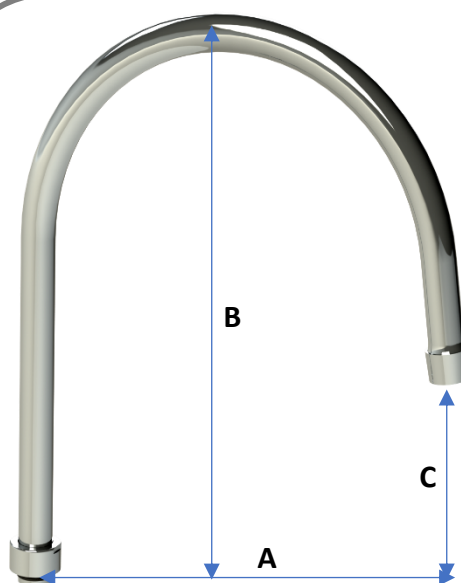

Pt. No.	A	B	C
G31-6-9S	165	240	160
G31-8-12S	200	240	150
G31-9-12S	230	300	135

'Global Stainless™' SINGLE WALL TAP w- Swivel GOOSENECK Spout

General :-

Australian Standards : **Watermarked**
Lic. No. 23008

SPOUTS :

WELS Reg. : TM41198
WELS Rated : 4 Stars
Flow Rate : 7.5 lpm
Material : 304 Stainless
Finish 1 : Polished

Tap Body :

Mounting Hole : 22 - 25mm
Material : 304 Stainless
Finish 1 : Polished

TECHNICAL :

Working Press. : 500kpa. (NPC)
Max. Press. rate : 1500kpa.
Operating Temp : 1 - 80° C.

Spout Height

Extension – Swivel



Pt. No. **GSPTEXT-SVSV-XXX**

Swivel Outlet

MADE To ORDER:

Various heights can be made – check with us if required.

Swivel Inlet

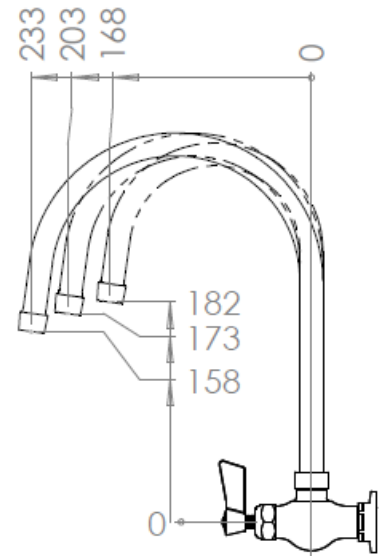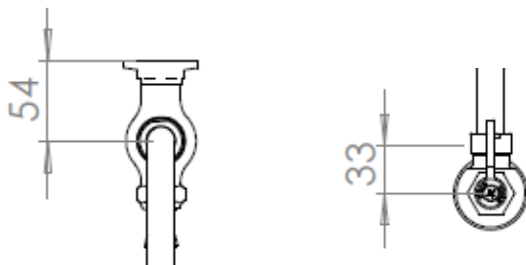

Spout Service Kit

Pt. No. **G-SPKIT**



TAP Service Kit

HOT SIDE SPINDLE SET
Pt. No. **GS03RKH-SS**



Product must be installed by registered Plumber in accordance with the PCA and AS/NZS3500.



GLOBAL
TAPWARE

'Global Stainless™' POT / Wok FILLER - SINGLE WALL TAP SINGLE 12" Swivel Spout w- END TAP



12" Single Spout Product Code :-
GS11G3512S

IMPORTANT:

- 1- Do not mount directly over a heat vent or live flame. Mount to the side if possible.
(Recommendation only - 300mm or **higher** away is best)
- 2- Keep Spout End Tap away from Ambient or Direct heat Source.

Features:

- All metal Components in contact with water are 304 S/S.
- Suits Hot or Cold water.
- 18" DOUBLE Swivel Arm fitted to Single Wall Tap body.
- Also Available in w- 18" & 24" Double Swivel End Tap Spout.
- SPOUTS Fitted w- High temperature (165°C) Silicone O'Rings to assist in lowering damage when install too close to heat source

SPARE PARTS

Part. No.s

- Spout O'Rings **Repair Kit:-** G-SPKIT
- Wall Tap **Repair Kit:-** GS03RKH-SS
- End Tap **Repair Kit:-** G25RK-SS

Technical:-

Australian Standards : **Watermarked**

WELS Reg. : TM41201
WELS Rated : 3 Stars
Flow Rate : 9 lpm

Mounting Hole : 22 - 25mm
Material : 304 Stainless
Finish 1 : Polished

Working Press. : 500kpa. (NPC)
Max. Press. rate : 1500kpa.
Operating Temp : 1 - 80° C.

WARRANTY:

36 Months for Commercial use.




Global Tapware Pty Ltd
E – info.tech@globaltapware.com
P – 07 38 55 2350
P – 1300 85 25 15


W- GLOBALTAPWARE.COM.AU




Product must be installed by registered Plumber in accordance with the PCA and AS/NZS3500.

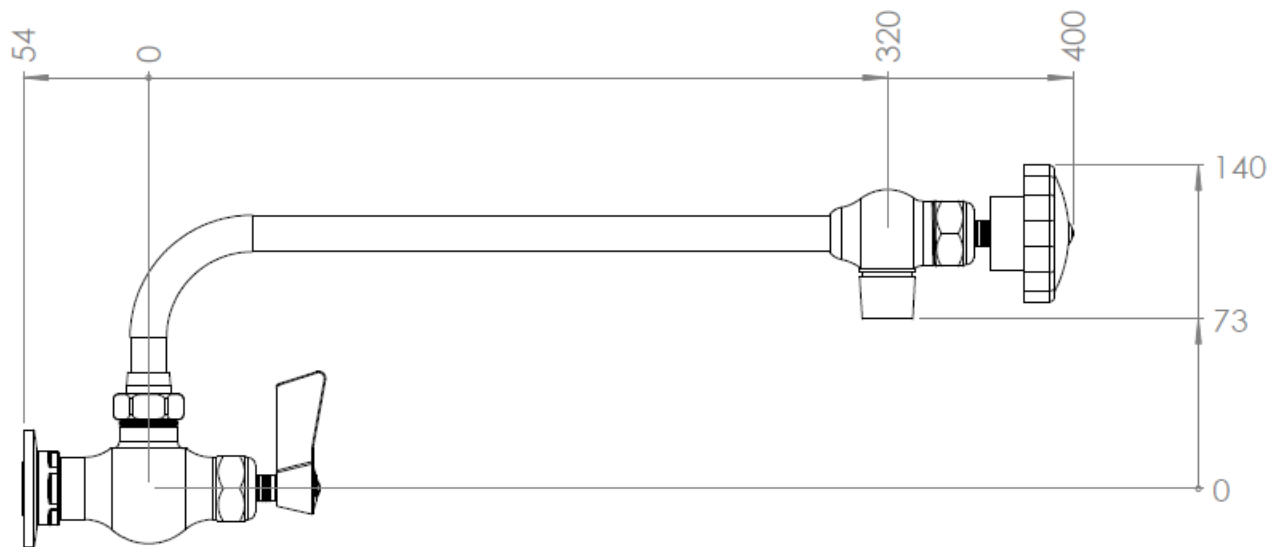

SIDE VIEW

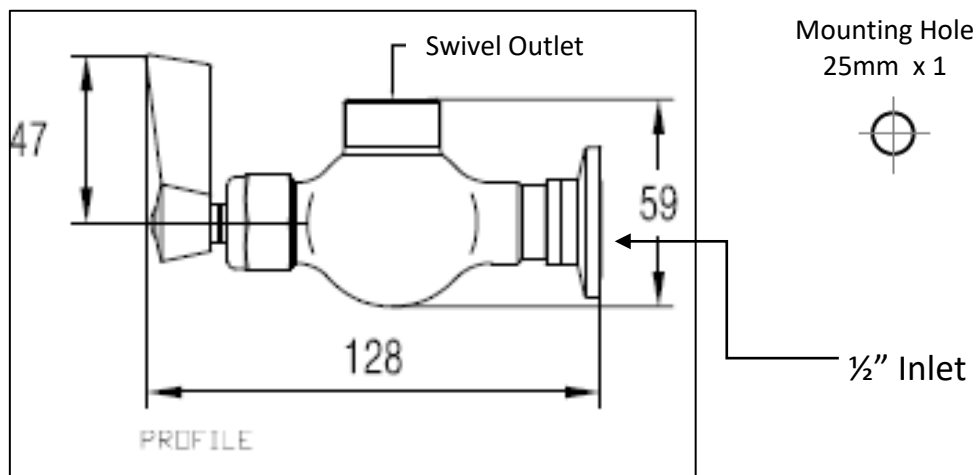

Spout Service Kit

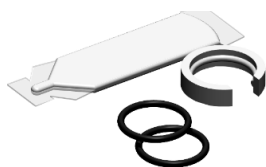

Pt. No. **G-SKIT**

Single Wall Tap Service Kit



Pt. No. **GS03RKH-SS**

Spout End Tap Service Kit



Pt. No. **G25RK-SS**



GLOBAL
TAPWARE

'Global Stainless™' POT / Wok FILLER - SINGLE WALL TAP DOUBLE 18" Swivel Spout w- END TAP



18" Double Spout Product Code

:- **GS11G3518S**

IMPORTANT:

- 1- Do not mount directly over a heat vent or live flame. Mount to the side if possible.
(Recommendation only - 300mm or higher away is best)
- 2- Keep Spout End Tap away from Ambient or Direct heat Source.

Features:

- All metal Components in contact with water are 304 S/S.
- Suits Hot or Cold water.
- 18" DOUBLE Swivel Arm fitted to Single Wall Tap body.
- Also Available in w- 12" Single & 24" Double Swivel w- End Tap Spout.
- SPOUTS Fitted w- High temperature (165°C) Silicone O'Rings to assist in lowering damage when install too close to heat source

SPARE PARTS

- Spout O'Rings **Repair Kit:-**
- Wall Tap **Repair Kit:-**
- End Tap **Repair Kit:-**

Part. No.s

G-SPKIT
GS03RKH-SS
G25RK-SS

Technical:-

Australian Standards : **Watermarked**

WELS Reg. : TM41201
WELS Rated : 3 Stars
Flow Rate : 9 lpm

Mounting Hole : 22 - 25mm
Material : 304 Stainless
Finish 1 : Polished

Working Press. : 500kpa. (NPC)
Max. Press. rate : 1500kpa.
Operating Temp : 1 - 80° C.

WARRANTY:

36 Months for Commercial use.




Global Tapware Pty Ltd
E – info.tech@globaltapware.com
P – 07 38 55 2350
P – 1300 85 25 15

W- GLOBALTAPWARE.COM.AU




Product must be installed by registered Plumber in accordance with the PCA and AS/NZS3500.

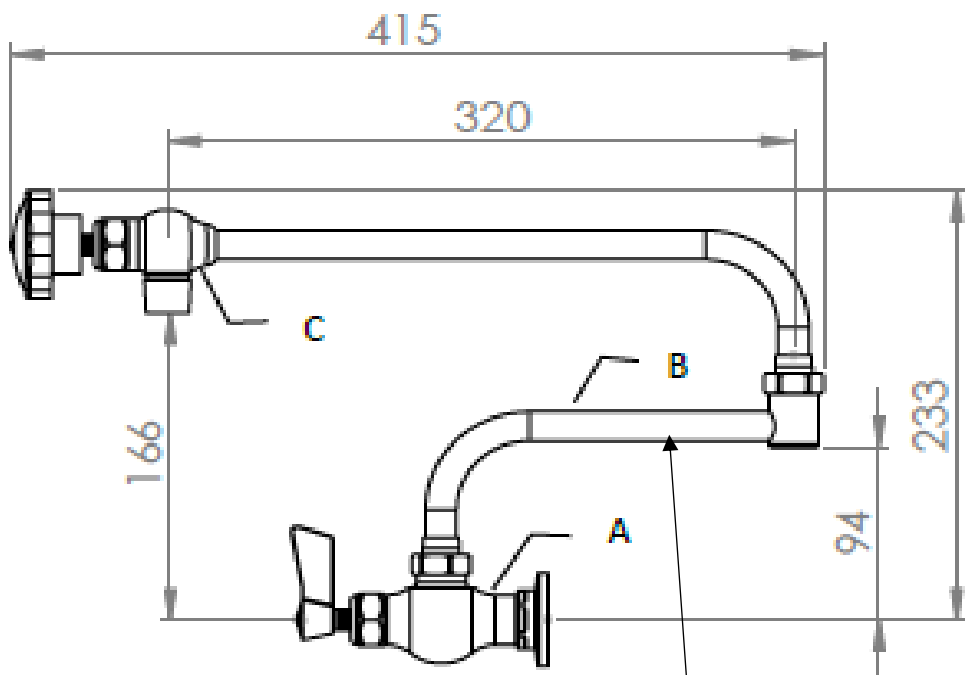

ITEM B:- available in 7" or 12"

ITEM :- C

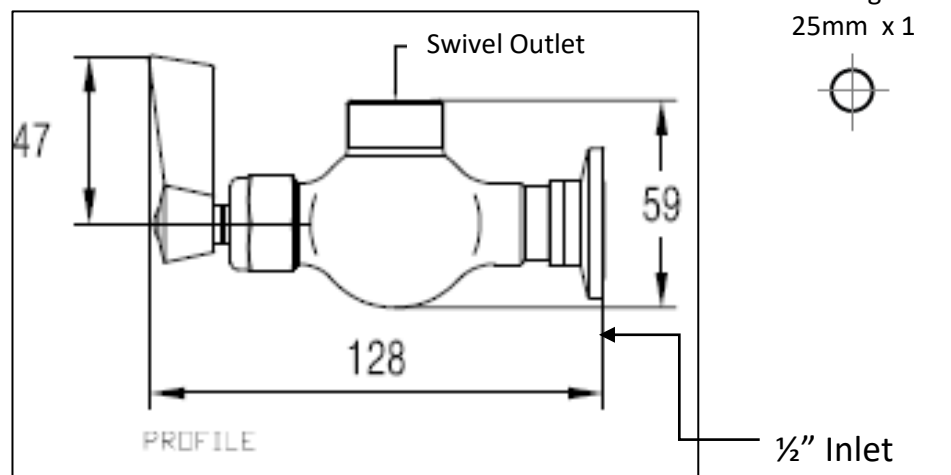

Spout Service Kit



Pt. No. **G-SKIT**

Single Wall Tap Service Kit



Pt. No. **GS03RKH-SS**

Spout End Tap Service Kit



Pt. No. **G25RK-SS**



GLOBAL
TAPWARE

'Global Stainless™' POT / Wok FILLER - SINGLE WALL TAP DOUBLE 24" Swivel Spout w- END TAP



24" Double Spout Product Code

:- **GS11G3524S**

IMPORTANT:

- 1- Do not mount directly over a heat vent or live flame. Mount to the side if possible.
(Recommendation only - 300mm or higher away is best)
- 2- Keep Spout End Tap away from Ambient or Direct heat Source.

Features:

- All metal Components in contact with water are 304 S/S.
- Suits Hot or Cold water.
- 18" DOUBLE Swivel Arm fitted to Single Wall Tap body.
- Also Available in w- 18" Double Swivel & 12" Single Swivel w- End Tap.
- SPOUTS Fitted w- High temperature (165°C) Silicone O'Rings to assist in lowering damage when install too close to heat source

SPARE PARTS

- Spout O'Rings **Repair Kit:-**
- Wall Tap **Repair Kit:-**
- End Tap **Repair Kit:-**

Part. No.s

G-SPKIT
GS03RKH-SS
G25RK-SS

Technical:-

Australian Standards : **Watermarked**

WELS Reg. : TM41201
WELS Rated : 3 Stars
Flow Rate : 9 lpm

Mounting Hole : 22 - 25mm
Material : 304 Stainless
Finish 1 : Polished

Working Press. : 500kpa. (NPC)
Max. Press. rate : 1500kpa.
Operating Temp : 1 - 80° C.

WARRANTY:

36 Months for Commercial use.




Global Tapware Pty Ltd
E – info.tech@globaltapware.com
P – 07 38 55 2350
P – 1300 85 25 15


W- GLOBALTAPWARE.COM.AU



Product must be installed by registered Plumber in accordance with the PCA and AS/NZS3500.

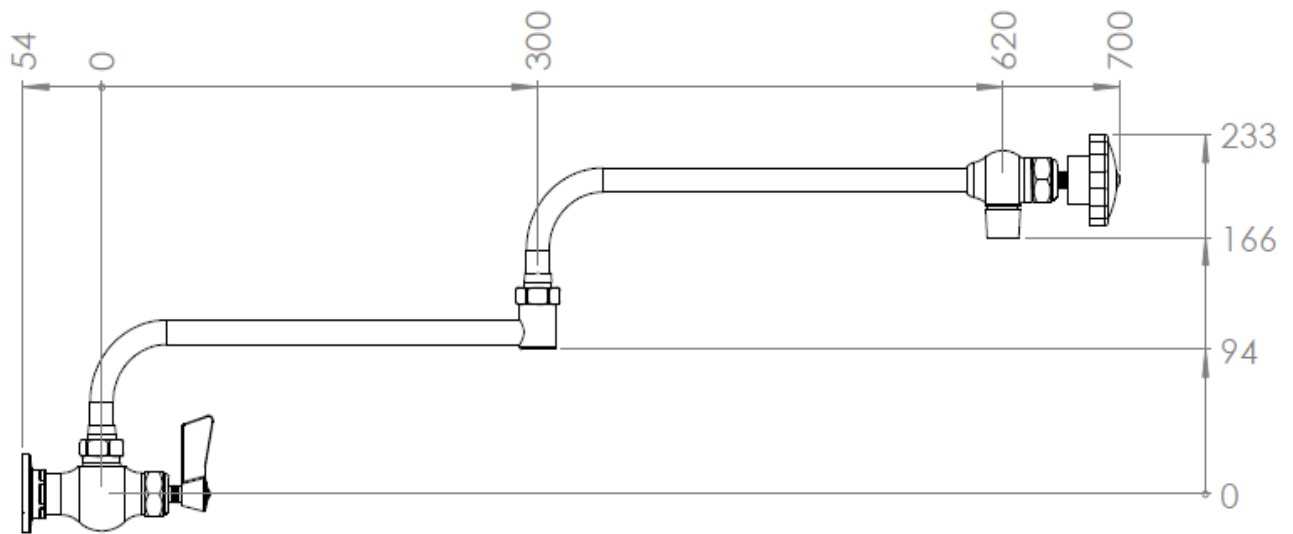

SIDE VIEW

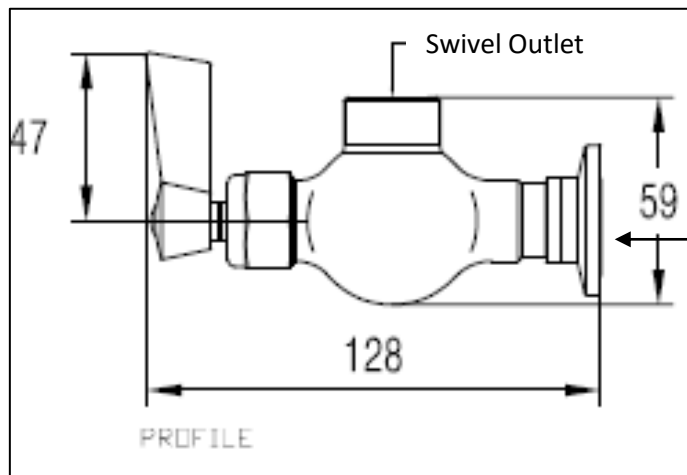

Swivel Outlet


Mounting Hole
25mm x 1



1/2" Inlet

PROFILE

Spout Service Kit



Pt. No. **G-SKIT**

Single Wall Tap Service Kit



Pt. No. **GS03RKH-SS**

Spout End Tap Service Kit



Pt. No. **G25RK-SS**

Various Sized STANDARD SPOUTS available

A	B	C	D	E	F
6"	8"	10"	12"	14"	16"



Gooseneck Spouts
also Available



6" Spout Pt. No.: **GS13G3006S**

8" Spout Pt. No.: **GS13G3008S**

10" Spout Pt. No.: **GS13G3010S**

12" Spout Pt. No.: **GS13G3012S**

14" Spout Pt. No.: **GS13G3014S**

16" Spout Pt. No.: **GS13G3016S**

Features:

- All metal Components in contact with water are 304 S/S.
- Suit Hot & Cold water.
- Jumper Valve Spindles.
- A Range of STANDARD Spout Sizes are available.
- A Range of GOOSENECK Spouts are available.
- Spout Service Kits available.
- Tap Repair Kits Available.
- **WATERMARKED & WELS** Registered.

WARRANTY:

- 36 Months for Commercial use.

Technical:-

Australian Standards : **Watermarked**

WELS Reg. : **T40512**
WELS Rated : **3 Stars**
Flow Rate : **9 lpm**

Mounting Hole 1 : **22 - 25mm x 1**
Material : **304 Stainless**
Finish 1 : **Polished**
Mounting Hole 2 : **32mm x 2**
Material : **304 Stainless**
Finish 1 : **Polished**

Working Press. : **500kpa. (NPC)**
Max. Press. rate : **1500kpa.**




Global Tapware Pty Ltd
E – info.tech@globaltapware.com
P – 07 38 55 2350
P – 1300 85 25 15
W- **GLOBALTAPWARE.COM.AU**



Product must be installed by registered Plumber in accordance with the PCA and AS/NZS3500.

Standard Spout

A	B	C	D	E
6"	8"	10"	12"	14"

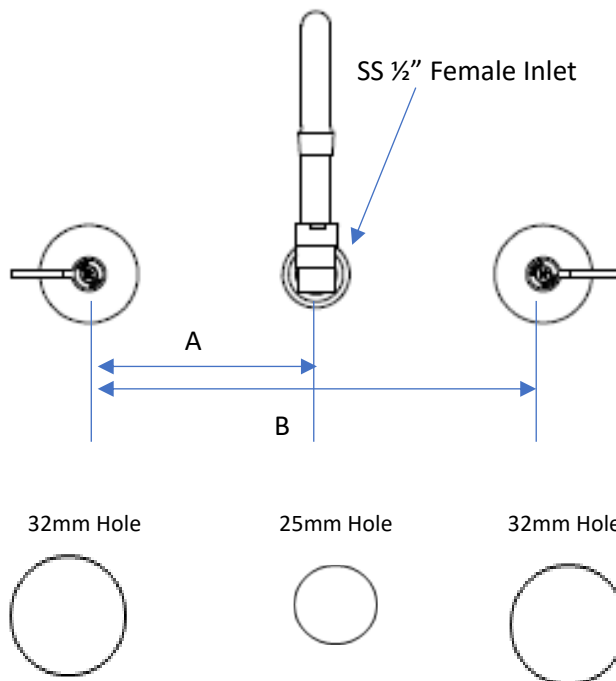

(A) & (B) Distances apart;
These are determined by
the Hidden Breach.



Only one size **Paddle Lever** is available - 100mm
All handles on these S/S Taps are a chrome plated
cast alloy and may have issue if exposed to some
aggressive environments. Replacements available



CROSS HANDLE is available - .
All handles on these S/S Taps are a chrome plated
cast alloy and may have issue if exposed to some
aggressive environments. Replacements available

Spout Service Kit



Pt. No. **G-SKIT**

Wall Stops Tap Service Kit



Pt. No. **TBA**

'Global Stainless™' WALL STOPS TAP w- GOOSENECK Swivel Spout



**Various Sized Gooseneck
SPOUTS available**

A	B	C	D	E	F
6"	8"	10"	12"	14"	16"



**Standard Spouts
also Available**



6" X 9" Spout Pt. No.: **GS13G31-6-9S**
8" X 12" Spout Pt. No.: **GS13G31-8-12S**
9" X 12" Spout Pt. No.: **GS13G31-9-12S**

Features:

- All metal Components in contact with water are 304 S/S.
- Suit Hot & Cold water.
- Jumper Valve Spindles.
- A Range of STANDARD Spout Sizes are available.
- A Range of GOOSENECK Spouts are available.
- Spout Service Kits available.
- Tap Repair Kits Available.
- **WATERMARKED & WELS Registered.**

WARRANTY:

- 36 Months for Commercial use.

Technical:-

Australian Standards : **Watermarked**

WELS Reg. : **TM43310**
WELS Rated : **3 Stars**
Flow Rate : **9 lpm**

Mounting Hole 1 : **22 - 25mm x 1**
Material : **304 Stainless**
Finish 1 : **Polished**
Mounting Hole 2 : **32mm x 2**
Material : **304 Stainless**
Finish 1 : **Polished**

Working Press. : **500kpa. (NPC)**
Max. Press. rate : **1500kpa.**





Global Tapware Pty Ltd
E – info.info@globaltapware.com
P – 07 38 55 2350
P – 1300 85 25 15
W- **GLOBALTAPWARE.COM.AU**



Product must be installed by registered Plumber in accordance with the PCA and AS/NZS3500.

(A) & (B) Distances apart:
These are determined by the Hidden Breach.

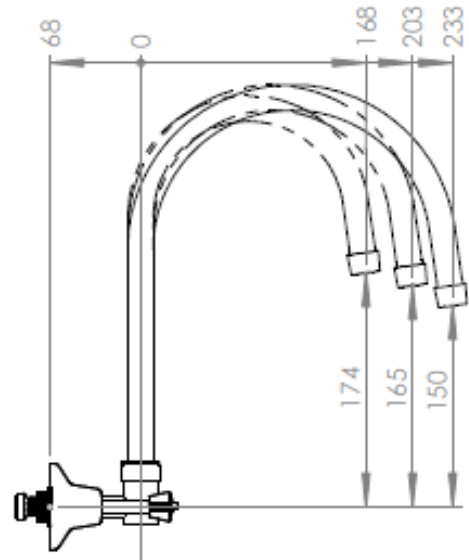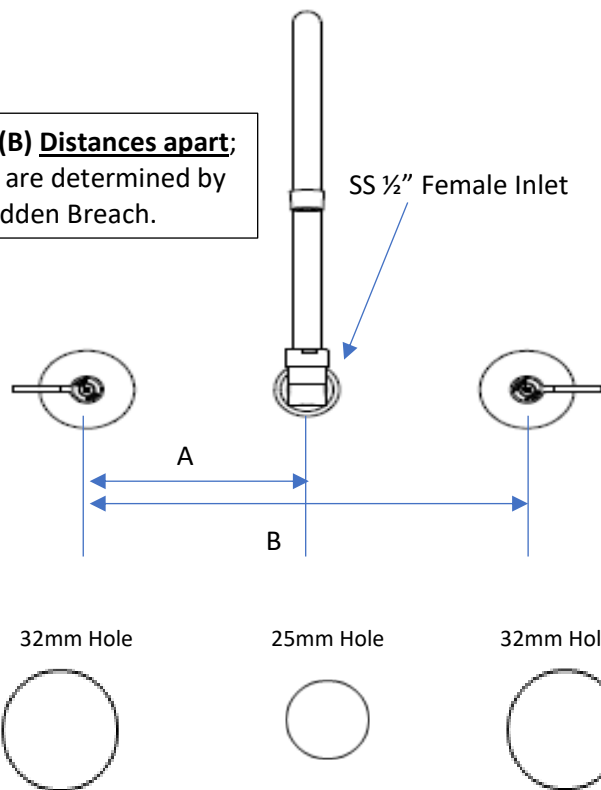

Only one size **Paddle Lever** is available - 100mm
All handles on these S/S Taps are a chrome plated cast alloy and may have issue if exposed to some aggressive environments. Replacements available



CROSS HANDLE is available - .
All handles on these S/S Taps are a chrome plated cast alloy and may have issue if exposed to some aggressive environments. Replacements available

Spout Service Kit



Pt. No. **G-SKIT**

Wall Stops Tap Service Kit



Pt. No. **TBA**



GLOBAL
TAPWARE

'Global Stainless™' Wall Tap – Adjustable Breach FOR COMMERCIAL INSTALLATIONS

STRAIGHT MOUNT

Pt. No. GS14AB-G3012S



ELBOW MOUNT

Pt. No. GS15AB-G3012S



WELS reg. TM40512, 9 LPM, 3 Star

TECHNICAL:


- Made from 304 Stainless Steel.
- Union Mounting, for ease of Installation.
- ½ or convert to ¼ turn Handles available.
- Adjustable Breach TEE [110 – 280mm]
- Outlet - suit various Spout Models & Pre-Rinse Sub-Assemblies.
- Inlet – ½" Female x ¾" Unions in either Elbow or Straight configurations.
- TEE Pipe uses Rubber Cone Compression Olives & ¾" Nuts.
- Suitable for Hot & Cold Water as per Aust. Standards.
- Spare parts are readily available and listed with Australia's largest Plumbing Retailer:
 - ✓ Hot Spindle:
Pt. No. GS03RKH-SS
 - ✓ Cold Spindle:
Pt. No. GS03RKC-SS

WARRANTY:

36 Months for
Commercial use.

Change last 3 Digits of Pt. No. for the spout you want.

	A	B	C	D	E	F
Pt. No.	6"	8"	10"	12"	14"	16"
Change -----	06S	08S	10S	12S	14S	16S

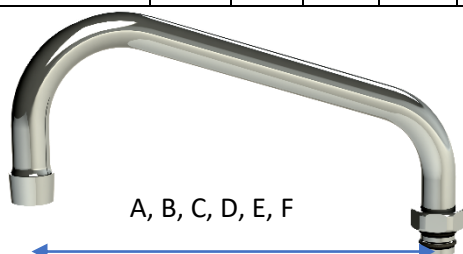

Global Tapware Pty Ltd

E – info.tech@globaltapware.com

P – 07 38 55 2350


P – 1300 85 25 15

W – GLOBALTAPWARE.COM.AU




GLOBAL
TAPWARE


STRAIGHT MOUNT

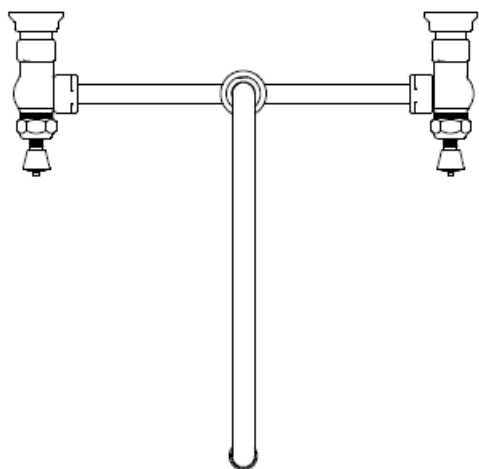


TOP VIEW



SIDE VIEW

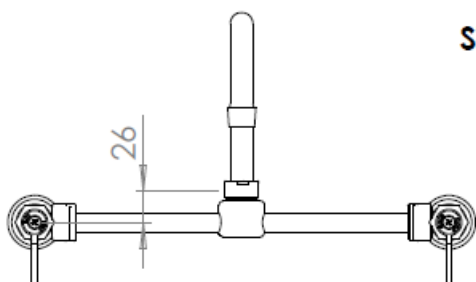


FRONT VIEW

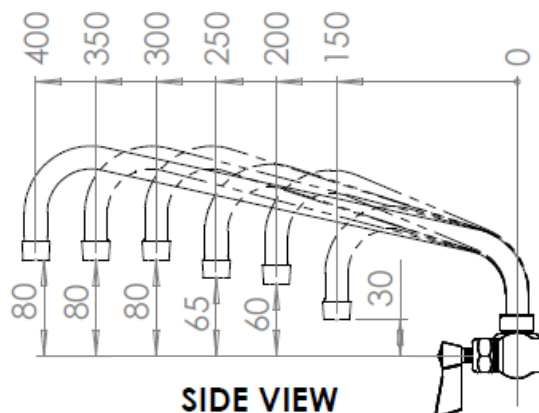


SIDE VIEW
STANDARD SPOUT

STANDARD SPOUT CHART		
PART No.	MODEL	LENGTH
GS14AB-G3006S	6"	150mm
GS14AB-G3008S	8"	200mm
GS14AB-G3010S	10"	250mm
GS14AB-G3012S	12"	300mm
GS14AB-G3014S	14"	350mm
GS14AB-G3016S	16"	400mm


ELBOW MOUNT

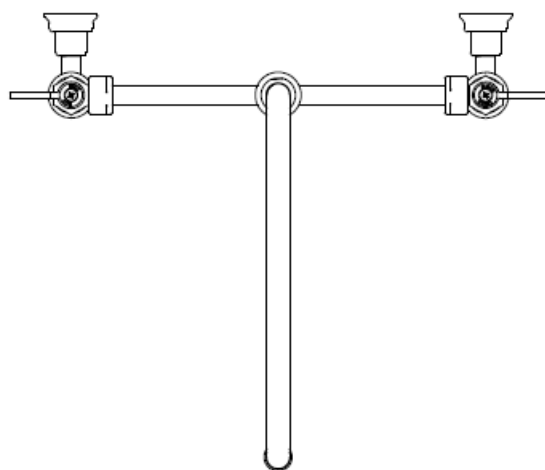


TOP VIEW



SIDE VIEW

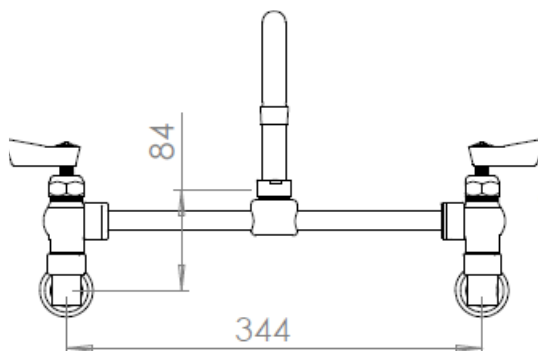

FRONT VIEW

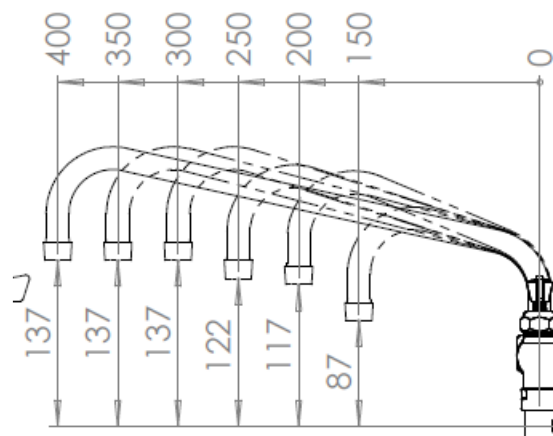

SIDE VIEW
STANDARD SPOUT

STANDARD SPOUT CHART		
PART No.	MODEL	LENGTH
GS15AB-G3006S	6"	150mm
GS15BG3008SA8	8"	200mm
GS15BG3010SA8	10"	250mm
GS15BG3012SA8	12"	300mm
GS15BG3014SA8	14"	350mm
GS15BG3016SA8	16"	400mm

'Global Stainless™' EXPOSED BREACH WALL TAP w- STANDARD Swivel Spout

Also Available with a
RANGE of SWIVEL Spouts:

A	B	C	D	E
6"	8"	10"	12"	14"



3 sizes of
Gooseneck Spouts
also Available

14" Spout Pt. No.:- **GS15G3014S**

12" Spout Pt. No. :- **GS15G3012S**

10" Spout Pt. No. :- **GS15G3010S**

8" Spout Pt. No. :- **GS15G3008S**

6" Spout Pt. No. :- **GS15G3006S**



Features:

- All metal Components in contact with water are 304 S/S.
- Suit Hot or Cold water.
- Spring Jumper Valve in Hob Tap.
- A Range of STANDARD Spout Sizes are available.
- A Range of GOOSENECK Spouts are available.
- Spout Service Kits available.
- Tap Repair Kits Available.
- **WATERMARKED & WELS** Registered.

WARRANTY:

- 36 Months for Commercial use.

Technical:-

Australian Standards : **Watermarked**

WELS Reg. : **TM40511**

WELS Rated : **3 Stars**

Flow Rate : **9 lpm**

Mounting Hole : **22 - 25mm**

Material : **304 Stainless**

Finish 1 : **Polished**

Working Press. : **500kpa. (NPC)**

Max. Press. rate : **1500kpa.**

Operating Temp : **1 - 80° C.**



Global Tapware Pty Ltd

E – info.tech@globaltapware.com

P – 07 38 55 2350

P – 1300 85 25 15


W- **GLOBALTAPWARE.COM.AU**




Product must be installed by registered Plumber in accordance with the PCA and AS/NZS3500.

Standard Spout

A	B	C	D	E
6"	8"	10"	12"	14"

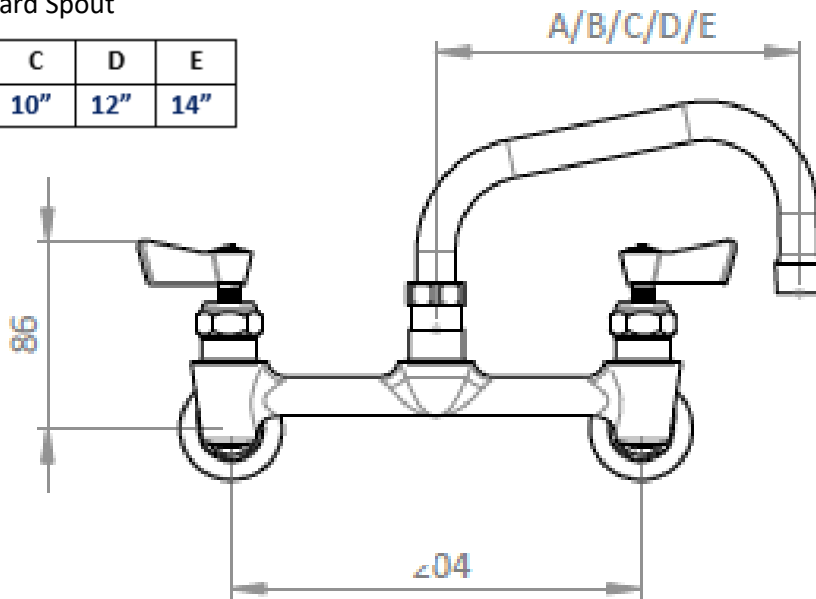

25mm Wall Hole x 2

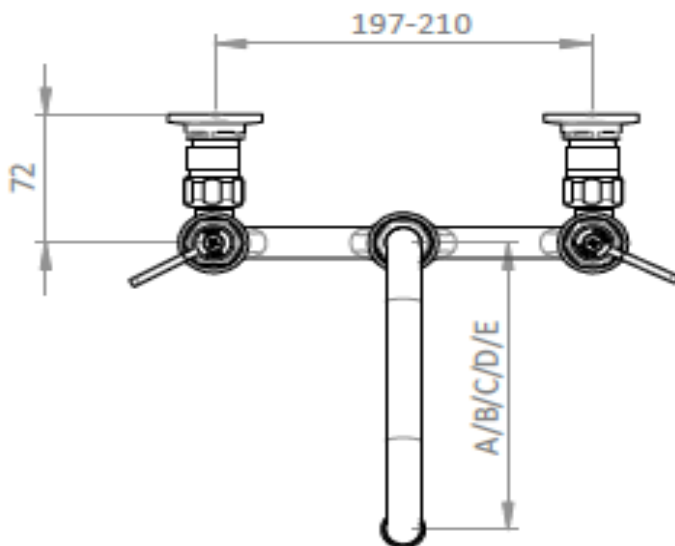

Re **CROSS HANDLE** & Only one size **Paddle Lever** are available -
All handles on these S/S Taps are a chrome plated cast alloy and may have issue if exposed to some aggressive environments. Replacements available

Spout Service Kit



Exposed Breach Tap Service Kits



HOT Pt. No. **GS03RKH-SS**



COLD Pt. No. **GS03RKC-SS**



Pt. Nr. **GS15G31-6-9S**

GS15G31-8-12S


GS15G31-9-12S

Features:

- Tap suits Hot, Cold or Tempered or R.O. Water
- DUAL FEED INLET
- Spring Jumper Valve Tap.
- Three Sizes Of Polished Stainless Steel Swivel GOOSENECK Spouts
- Height Extension Piece available
- Spout Service Kits available
- Tap Repair Kits Available

WARRANTY:

- 36 Months for Commercial use

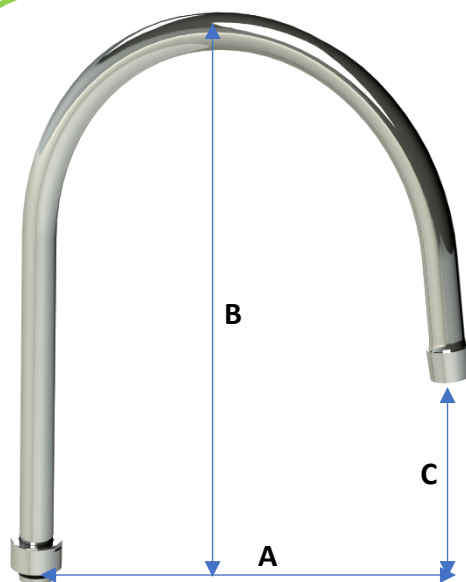

Pt. No.	A	B	C
G31-6-9S	165	240	160
G31-8-12S	200	240	150
G31-9-12S	230	300	135



GLOBAL
TAPWARE

'Global Stainless'TM

EXPOSED BREACH WALL TAP

w- Swivel GOOSENECK Spout

General :-

Australian Standards : **Watermarked**
Lic. No. **23008**

SPOUTS :

WELS Reg. : **TM41198**
WELS Rated : **4 Stars**
Flow Rate : **7.5 lpm**
Material : **304 Stainless**
Finish 1 : **Polished**

Tap Body :

Mounting Hole : **22 - 25mm**
Material : **304 Stainless**
Finish 1 : **Polished**

TECHNICAL :

Working Press. : **500kpa. (NPC)**
Max. Press. rate : **1500kpa.**
Operating Temp : **1 - 80° C.**

Spout Height

Extension – Swivel

Pt. No. **GSPTXT-SVSV-XXX**


Swivel Outlet

Various heights
can be made –
check with us if
required.

Swivel Inlet




½" Inlet x 2

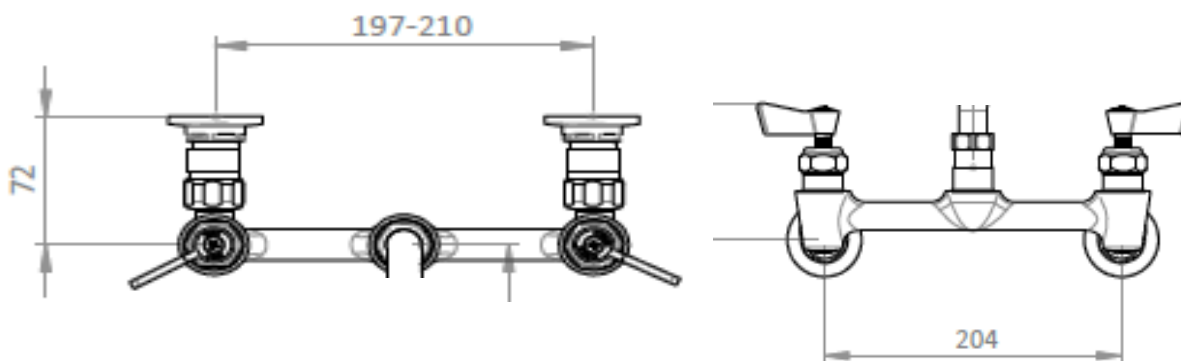

Spout Service Kit


Pt. No. **G-SKIT**



TAP Service Kit

COLD SIDE Pt. No. **GS03RKC-SS**

HOT SIDE Pt. No. **GS03RKH-SS**

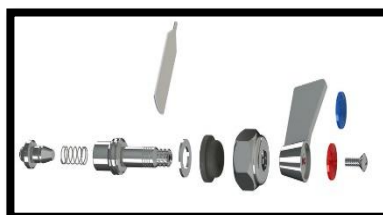

Product must be installed by registered
Plumber in accordance with the PCA and
AS/NZS3500.

'Global Stainless™' EXPOSED BREACH WALL TAP w- DOUBLE Swivel Spout w- END TAP

Also Available as a
SINGLE Swivel Spout
w- End Tap



12" Product Code :- **GS15G3512S**



18" Product Code :- **GS15G3518S**

24" Product Code :- **GS15G3524S**

Features:

- All metal Components in contact with water are 304 S/S.
- Suit Hot or Cold water.
- Spring Jumper Valve in Hob Tap.
- Fixed Jumper On End Tap.
- Either 7" or 12" Double Swivel Arm fitted to Tap body.
- Available in w- 12", 18", 24" Swivel End Tap Spout.
- Spout Service Kits available.
- Tap Repair Kits Available.

WARRANTY:

- 36 Months for Commercial use.

Technical:-

Australian Standards : **Watermarked**

WELS Reg. : **TM41201**

WELS Rated : **3 Stars**

Flow Rate : **9 lpm**

Mounting Hole : **22 - 25mm**

Material : **304 Stainless**

Finish 1 : **Polished**

Working Press. : **500kpa. (NPC)**

Max. Press. rate : **1500kpa.**

Operating Temp : **1 - 80° C.**





Global Tapware Pty Ltd
E – sales.info@globaltapware.com
P – 07 38 55 2350
P – 1300 85 25 15

W- **GLOBALTAPWARE.COM.AU**



Product must be installed by registered Plumber in accordance with the PCA and AS/NZS3500.

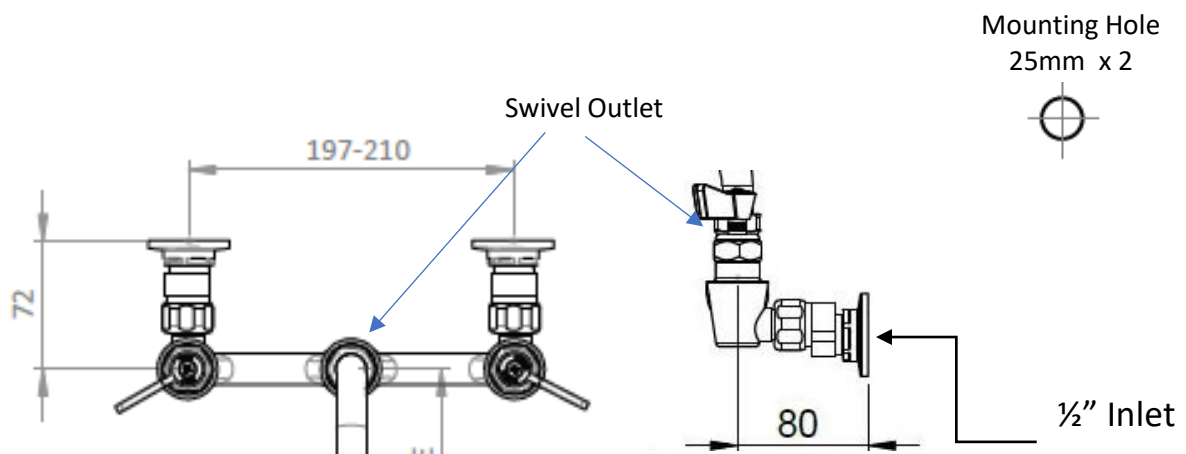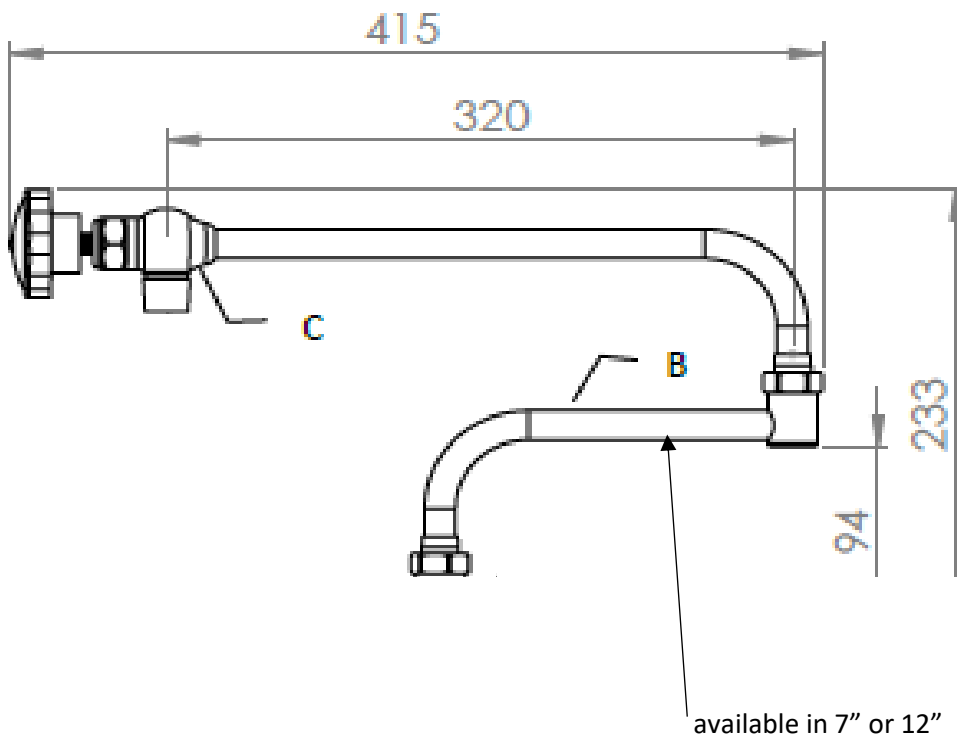

Spout Service Kit



Pt. No. G-SKIT

Single Wall Tap Service Kit



HOT Pt. No. GS03RKH-SS
COLD Pt. No. GS03RKC-SS

Spout End Tap Service Kit



Pt. No. G25RK-SS

'Global Stainless'™ CLEANERS SINK WALL TAP w- Cable Support Anchor to Wall

6" SPOUT

Pt. No.- **GS15G3006-CS**



8" SPOUT

Pt. No.- **GS15G3008-CS**



Features:

- Suit Hot or Cold water
- Spring Jumper Valves.
- 6", 8" Swivel Spout.
- Fitted with a S/S Clamp / Hook on Spout + S/S PVC coated Cable, Crimped onto special Support Bracket by installer.
- Cables allows Spout to Swivel & Support a bucket.
- Repair Kits Available

WARRANTY:

- 36 Months for Commercial use

Technical:-

Australian Standards : **Watermarked**

WELS Reg. : **TM41201**

WELS Rated : **3 Stars**

Flow Rate : **9 lpm**

Mounting Hole : **22 - 25mm**

Breach Adjustment : **197 - 210mm**

Material : **304 Stainless**

Finish 1 : **Polished**

Working Press. : **500kpa. (NPC)**

Max. Press. rate : **1500kpa.**

Operating Temp : **1 - 80° C.**



Global Tapware Pty Ltd

E – sales.info@globaltapware.com

P – 07 38 55 2350

P – 1300 85 25 15

W- **GLOBALTAPWARE.COM.AU**




Product must be installed by registered Plumber in accordance with the PCA and AS/NZS3500.

NOTE:- Determining the spout length.

The spout aerator should reach approx. centre of Cleaners Sink e.g. - if using a standard 450mm sink then allow 80 for tap offset + 150mm (6") for spout, giving a reach total of 230mm = near to centre of bowl.


6" SPOUT

Pt. No.- **GS15G3006-CS**

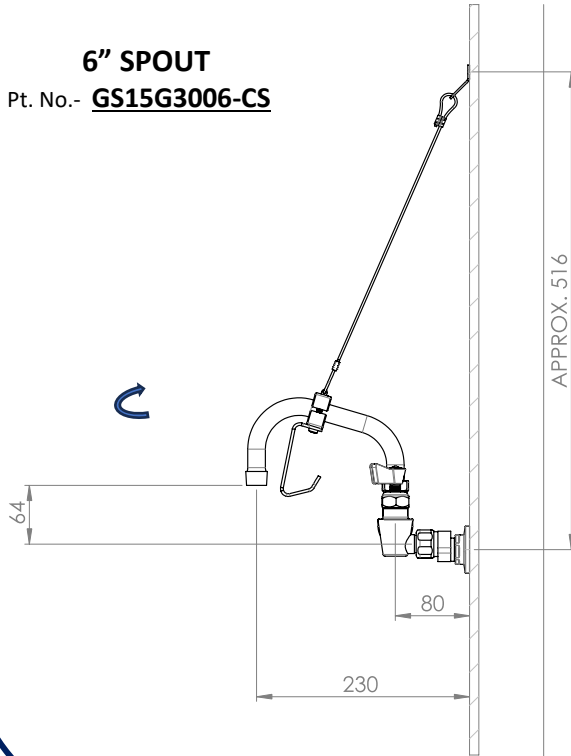

8" SPOUT

Pt. No.- **GS15G3008-CS**

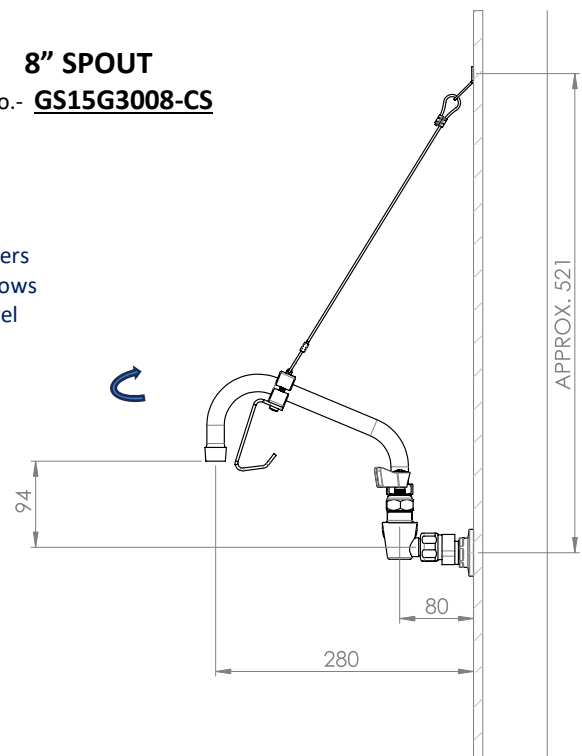

The Cable Offers
Support & Allows
Spout to Swivel

FEATURES :-

- 1 – Bucket Hook & Cable Brackets are made from 304 S/S.
- 2 – The Cable is S/S with a PVC Coating for Hygiene.
- 3 – The Wall Cable Bracket must be mounted to a stud or some other form to support weight. (This is the responsibility of Installer. If no support, then DO NOT fit and remove from spout.)
- 4 – Height positioning of the Wall Bracket is left to the installer to determine. Above is a guide.
- 5 – The two spout sizes are the best for filling bucket in the right position. Not Short / Not Long.
- 6 – All spouts are made from S/S tube and come with a highly polished finish. Other longer spouts are available if required.
- 7 – All Global Stainless Taps are made from 304 Stainless with a Highly Polished finish.
- 8 – Installation is responsibility of installer and is not included in our warranty.

ITEM A :- Spout Service Kit

Pt. No – **G-SKIT**



ITEM B :- Tap SBA Repair Kits



COLD SPINDLES

Pt. No. **GS03RKC-SS**

HOT SPINDLES

Pt. No. **GS03RKH-SS**

A range of Standard & Gooseneck Spouts available:

A	B	C	D	E
6"	8"	10"	12"	14"



3 sizes of Gooseneck Spouts also Available



14" Spout Pt. No. :- **GS16G3014S**
 12" Spout Pt. No. :- **GS16G3012S**
 10" Spout Pt. No. :- **GS16G3010S**
 8" Spout Pt. No. :- **GS16G3008S**
 6" Spout Pt. No. :- **GS16G3006S**

Features:

- All metal Components in contact with water are 304 S/S.
- Suit Hot or Cold water.
- Spring Jumper Valve in Hob Tap.
- A Range of STANDARD Spout Sizes are available.
- A Range of GOOSENECK Spouts are available.
- Spout Service Kits available.
- Tap Repair Kits Available.
- **WATERMARKED & WELS** Registered.

WARRANTY:

- 36 Months for Commercial use.

Technical:-

Australian Standards : **Watermarked**

WELS Reg. : **TM41087**
WELS Rated : **3 Stars**
Flow Rate : **9 lpm**

Mounting Hole : **22 - 25mm**
Material : **304 Stainless**
Finish 1 : **Polished**

Working Press. : **500kpa. (NPC)**
Max. Press. rate : **1500kpa.**
Operating Temp : **1 - 80° C.**



Global Tapware Pty Ltd

E – info.info@globaltapware.com


P – 07 38 55 2350

P – 1300 85 25 15

W- GLOBALTAPWARE.COM.AU



Product must be installed by registered
Plumber in accordance with the PCA and
AS/NZS3500.

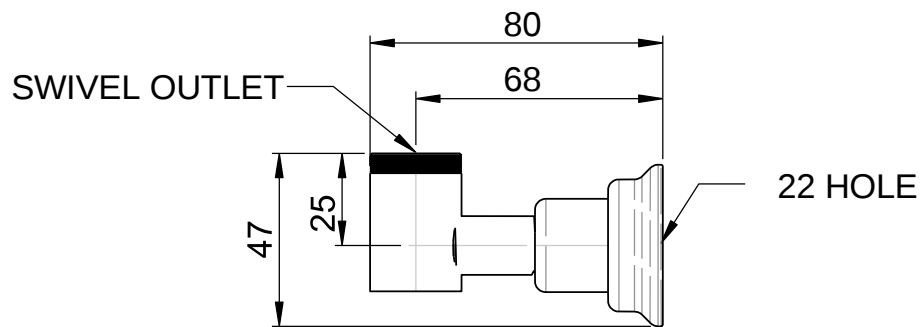

Spout Service Kit



Pt. No. **G-SKIT**



GLOBAL TAPWARE

Manufacturers of Quality Commercial Tapware



WWW.GLOBALTAPWARE.COM.AU

P1 - 07 3855 2350

P2 – 1300 85 25 15

E – info.tech@globaltapware.com