



GLOBAL
TAPWARE



Introducing the NEWEST & MOST INNOVATIVE Concept to date in **'KNEE BASINS'** – NOW MADE IN **'COLOUR'**

- ✓ Choice of Three [3] Colours. First Time ever on market.
- ✓ All supplied under a Highly Polished Bowl –
 - ✓ A – STAINLESS-STEEL Panels. (in No. 4 finish)
 - ✓ B – Semi Gloss BLACK Side Panels w- S/S Front Panel.
 - ✓ C – Semi Gloss WHITE Side Panels w- S/S Front Panel.
 - ✓ D – All WHITE Panels.
 - ✓ E – All BLACK Panels
 - ✓ F – S/S Splashback Panel (Can be available in Colour)

- ✓ Rounded Corner Bowls = OHS Safer

A



B



C



- ✓ OHS Safe with Larger Spouts
- ✓ To get whole of arm under.

- ✓ A Better Push Valve.
- ✓ A Simple ON / OFF action.
- ✓ NO Timer Available Yet

- ✓ Designed for Minimal Maintenance
- ✓ Innovative Push / Access Panel. Easier to gain access to Valves & Hoses for maintenance.


- ✓ A Better Design to fix to wall . A system we design in our earlier model is carried over here for just a one man install = cost savings.

Images are Renderings & may vary slightly from actual product.

- ✓ **2-part Gooseneck Spouts** – w- Grub Screw Lock.
At 222mm Tall & 170mm reach it Bigger than others on the market Allowing for full Arm emersion.



❖ Designed for a 1 man Install, using the 'EASY Fit Kit'.

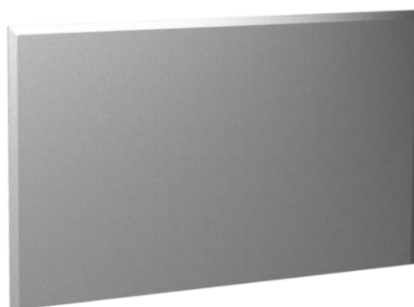

S/S Splash Back Panel
In No. 4 Finish
* Colour (P.O.A.)
w- 3 Edge Breaks
520mm (W) x 300mm (H)

Images are Design Renderings & may vary slightly from actual product.

FEATURES:

- All Polished Stainless-Steel Bowl w- **Round Corners**
- Body Frame w- **Colour Options:- (1) No. 4 Stainless. (2) Powder Coated White (3) Powder Coated Black. (4) Mixed**
- Quick & Easy to fit Kit for **one Man install**.
- Supplied with **40mm Plug & Waste**. – Watermark
- Supplied with **Tempering Valve (TV)** – Watermark
- Can be supplied with Thermostatic Mixing Valve (TMV) instead of the Tempering Valve (TV). Will cost more.
- Supplied with **Push On / Off Valve** – Watermark - New concept in Push On Valve for Knee Basins.
- Supplied with **170 mm Gooseneck Spout** – Watermark / WELS rated 3 Star & 7 lpm & WELS Reg. T39425
- 12month warranty on parts.
- **SPLASH-BACK** sold Separately & can be done in Colours **Black** Or **White**. – Enquire with us about Coloured Prices.

PACKING Dimensions & Weight - 55cm x 45 cm x 35 cm Brown Box / 10 kg (Rounded Up) without Splashback.

PRODUCT	Part No.s	RRP (w-TV)	To Replace w- TMV add \$ to Price & code from 'TV' to 'TMV'	
A) STAINLESS - All Panels	Pt. No. GI-KOB01TV	RRP \$ _____ + GST	Add \$ _____ + GST	
B) S/S Push Panel & WHITE Sides	Pt. No. GI-KOB01TV-WS	RRP \$ _____ + GST	Add \$ _____ + GST	
C) S/S Push Panel & BLACK Sides	Pt. No. GI-KOB01TV-BS	RRP \$ _____ + GST	Add \$ _____ + GST	
D) All WHITE Panels	Pt. No. GI-KOB01TV-W	RRP \$ _____ + GST	Add \$ _____ + GST	
E) All BLACK Panels	Pt. No. GI-KOB01TV-B	RRP \$ _____ + GST	Add \$ _____ + GST	
F1) Splash Back - S/S No.4	Pt. No. GI-KB-SB-300SS	RRP \$ _____ + GST	Add \$ _____ + GST	
F2) Splash Back- Coloured White	Pt. No. GI-KB-SB-300W	RRP \$ ____ P.O.A. ____ + GST	Min. Batch Qty = 5	




GLOBAL
TAPWARE

GLOBAL  iNOX

hand2free 


BY GLOBAL TAPWARE PTY LTD

SIDE VIEW

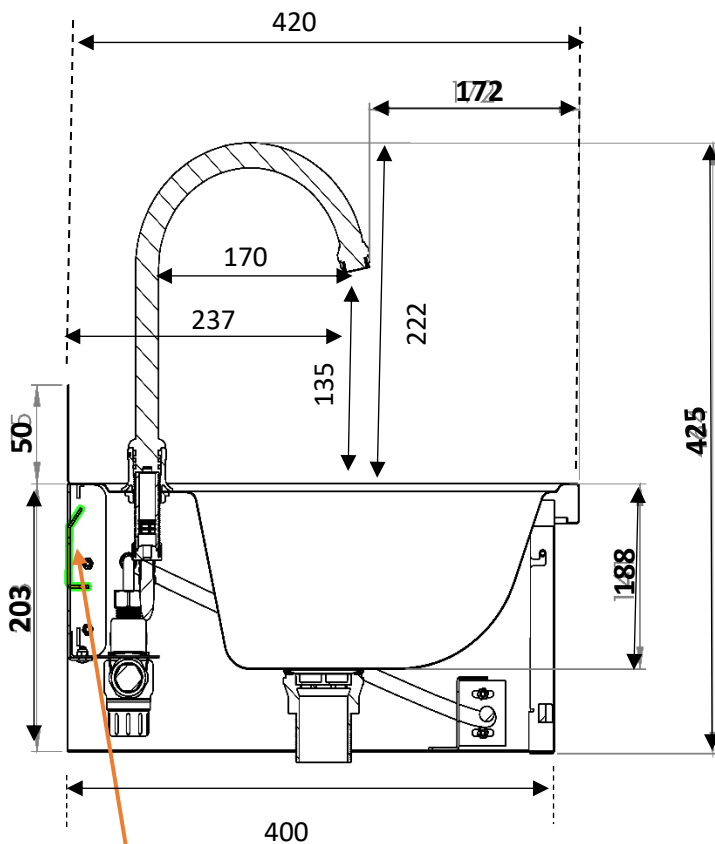


The "Easy Fit Kit"
Wall Bracket System

BACK VIEW

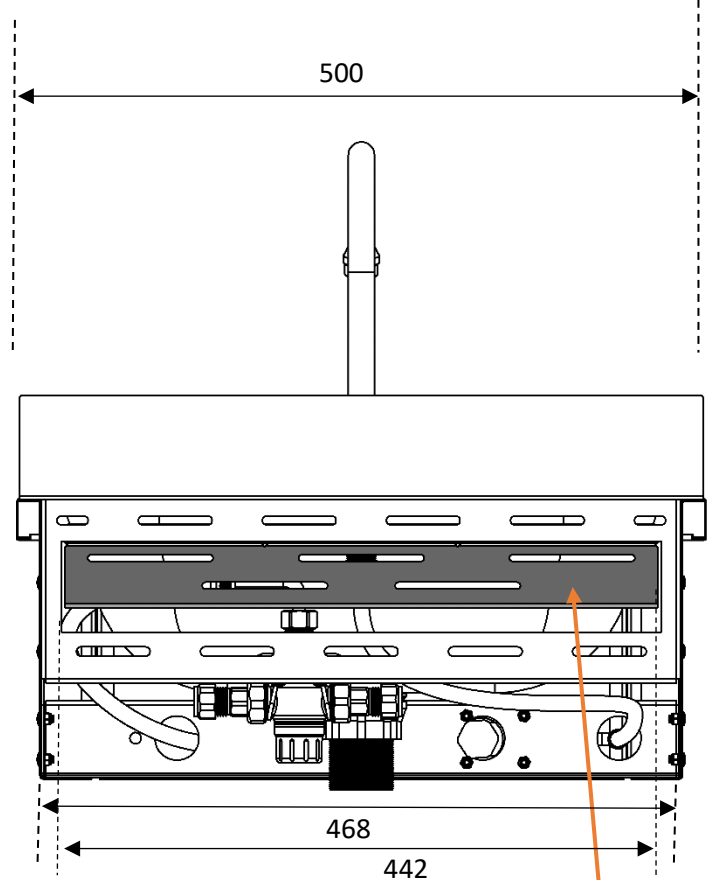

The "Easy Fit Kit"
Wall Bracket System

UNDERNEATH VIEW

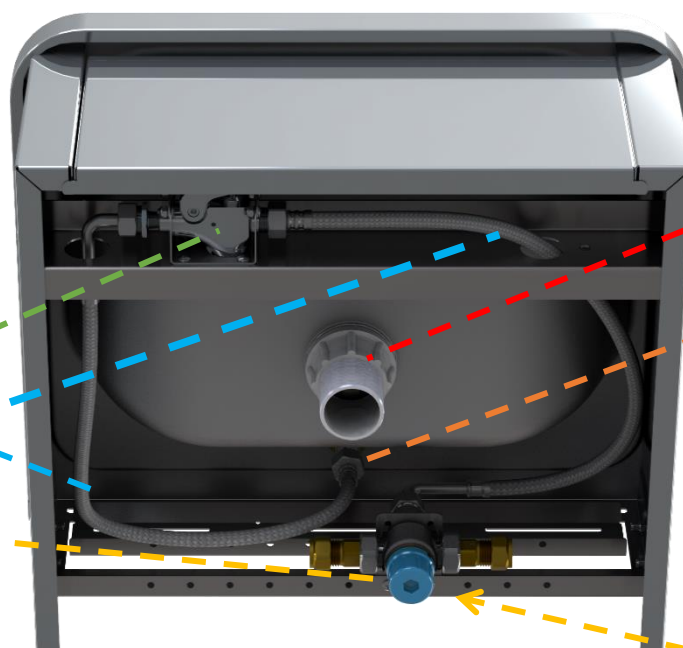

SUPPLIED & FITTED :-

Final testing to be done on site.

1 – Push ON / OFF Valve.

2 – Flexible Hoses x 2

3 – Tempering Valve.
Mix to be set on site

SUPPLIED but not FITTED:

4 - 40mm Plug & Waste

SUPPLIED Partly FITTED:

5 - Large Gooseneck Spout

Some Assembly required on top

NOTE :- Tempering Valve can be swapped out for a Thermostatic Mixing Valve






GLOBAL
TAPWARE

GLOBAL iNOX

hand2free


BY GLOBAL TAPWARE PTY LTD

INSTALLATION INSTRUCTIONS

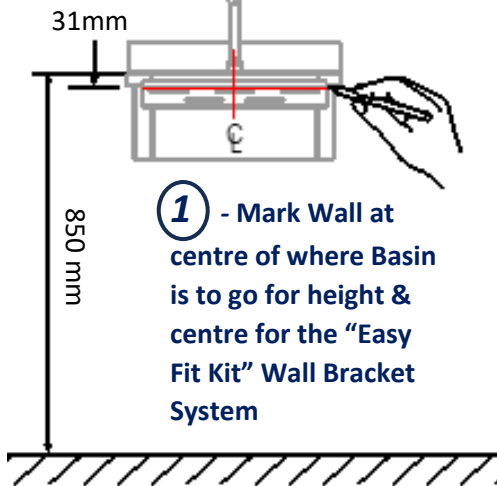


- 1** - Mark Wall at centre of where Basin is to go for height & centre for the "Easy Fit Kit" Wall Bracket System

- 1 - The Standard Height to top of basin is 850mm. Make a mark 31mm down from 850.
2 - Using a level, mark 280 either side of the centre mark.
3 - Locate Studs or solid fastening point. Draw Line down the wall when found. If no solid points found, then use High Quality Anchors that are suitable.
4 - Using the slots on the bracket mark your anchoring points

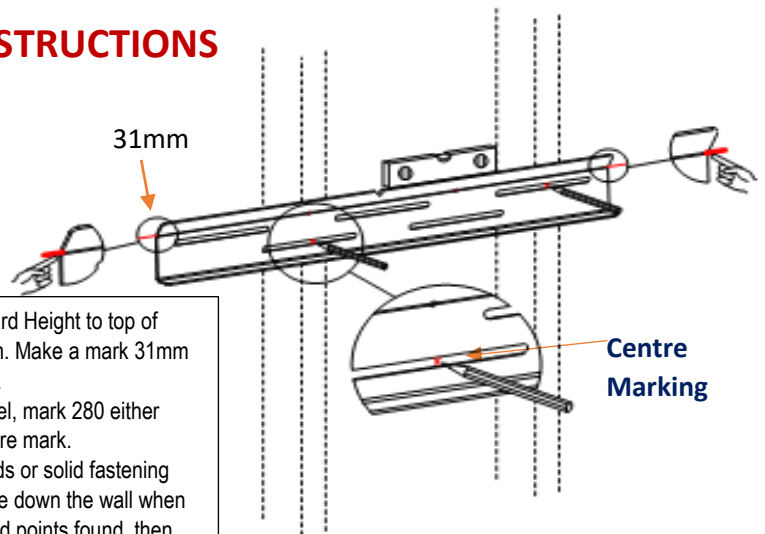


Centre Marking

- 2** - Use Level for Marking out using "Easy Fit Kit". Use Quality Fastening method & screws. Best into solid wall or plate / noggin.

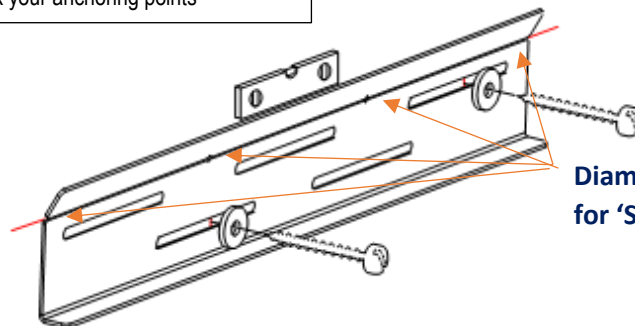


Diamond Cut Outs for 'Sight Lines'

- 3** - PLACE BASIN ONTO WALL BRACKET.

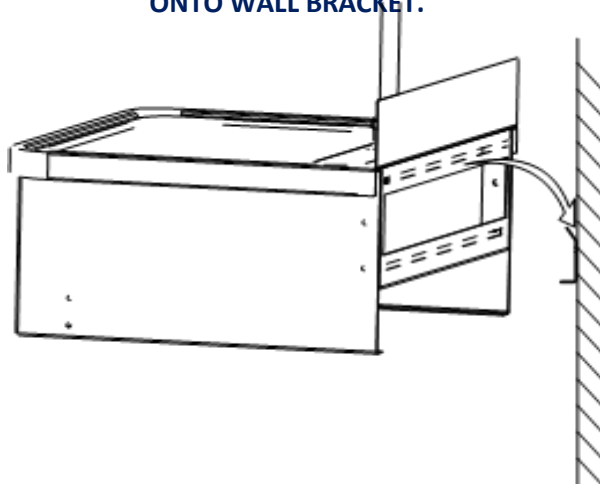

- 4** - We Recommend a SECOND FASTENING of BASIN TO WALL.

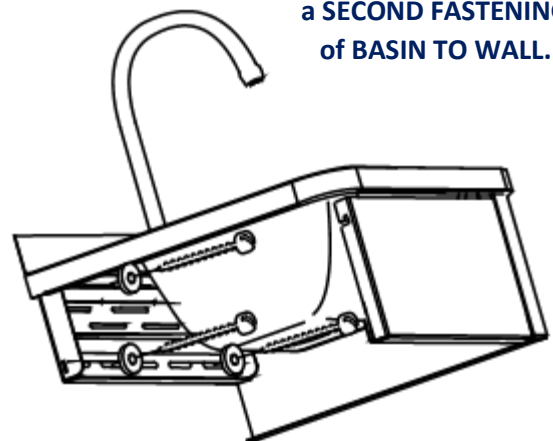

- 5 - FINISH OFF:** (A) Install **Plug & Waste**. (B) Connect Water Up To **Tempering Valve (TV)**. (C) Insert Spout Into HOUSING & **Tighten GRUB SCREW** up hard to restrict Spout Movement, ** Remove Aerator before flushing line. (4a) Fill Out **TV Label** and place on the inside Wall Panel, near the TV. (4b) Fill In **Install Details Sticker** & Stick it inside of the Front push Panel, off to one side.