‘Global STAINLESS’
SINGLE DUAL HOB Tap – VARIOUS SPOUTS

All parts are *STAINLESS STEEL* = Lead Free

Global Tapware Pty Ltd
E – info.tech@globaltapware.com
P – 07 38 55 2350
P – 1300 85 25 15
W- GLOBALTAPWARE.COM.AU

Products must be installed by registered Plumber in accordance with the PCA and AS/NZS3500.



STANDARD SPOUT:		
	Spout Length	**Part Number**
A	6” Long	**GS03G3006S**
B	8” Long	**GS03G3008S**
C	10” Long	**GS03G3010S**
D	12” Long	**GS03G3012S**
E	14” Long	**GS03G3014S**
F	16” Long	**GS03G3016S**

WELS Reg. T40511
3 Star / 9 lpm



GOOSENECK SPOUTS:		
	Spout Length	**Part Number**
A	6”x 9” Long	**GS03G31-6-9S**
B	8”x 12” Long	**GS03G31-8-12S**
C	9”x 12” Long	**GS03G31-9-12S**

WELS Reg. TM42773
4 Star / 7.5 lpm

Keep swivel spout away from direct heat.

End Tap



KETTLE / POT SPOUT:		
	Spout Length	**Part Number**
A	18” Double Swivel	**GS03G3518S**
B	18” Double Swivel	**GS03G3524S**
C	12” Single Swivel	**GS03G3512S**

WELS Reg. TM41021
3 Star / 9 lpm

NOTE: All Parts are Replaceable Nationally via Plumbing Stores

1. **DROP N LOCK** = Lock Nut + 2 O’Rings
2. **Hot & / or Cold Repair Kits AVAILABLE**
3. **Polished S/S Swivel SPOUTS**
4. ***Replaceable O’Rings.***


WARRANTY: 36 months from Install date.

** **Australia’s first Commercial Stainless-Steel Tap & still the MOST Reliable on Market.**


AS3718 WaterMark Certificate No: 23008 Global Tapware Pty Ltd


SINGLE DUAL HOB Tap Feed: – HOT & COLD

TOP View

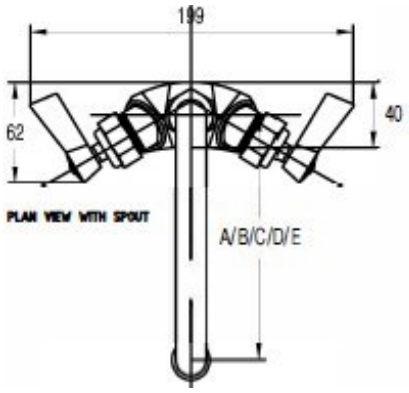


Standard Spout Front View




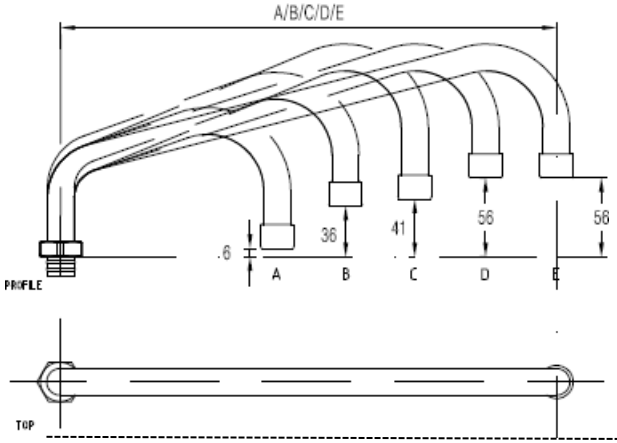

STANDARD SPOUTS		
	Pt. No.	LENGTH
A	G3006S	6”/179
B	G3008S	8”/227
C	G3010S	10”/276
D	G3012S	12”/326
E	G3014S	14”/376
F	G3016S	16”/400

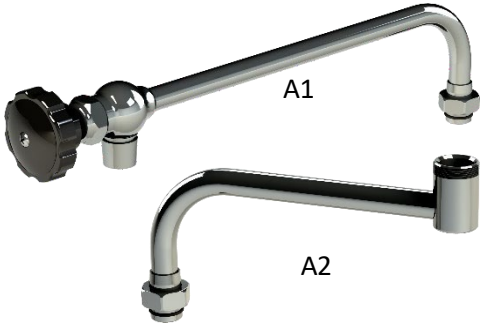


KETTLE / POT SPOUTS			
Part No.	A1	A2	1+2
G3524S			23”
G3518S			18”
G3511S	11”		
G3407S		7”	
G3412S		12”	

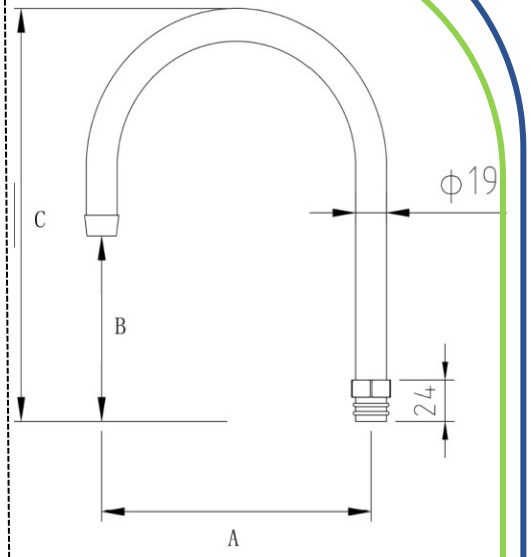


GOOSENECK SPOUTS			
Part No.	A	B	C
G31-6-9S	165	108	240
G31-8-12S	200	150	300
G31-9-12S	230	135	300


Ref.	ITEM
1	SS CAST BODY
2	POLISHED SS SPOUTS
3	2 X Inlet Hoses & S/S MOUNTING KIT

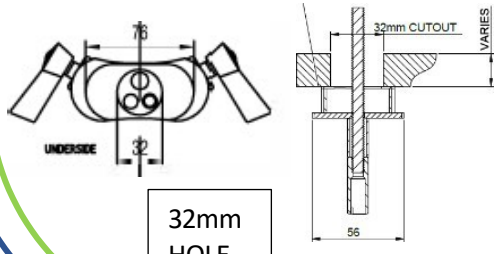

32mm HOLE

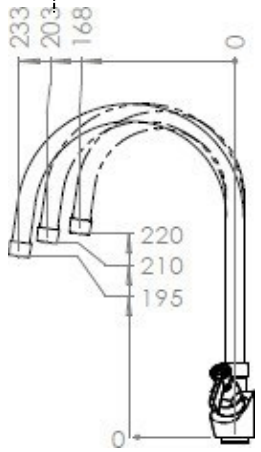

GOOSENECK SPOUT View

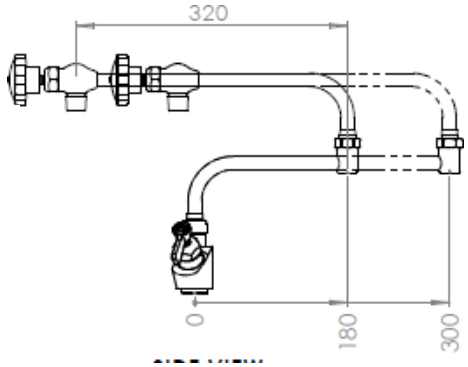

DOUBLE SWIVEL Vie

Technical: -

AS3718 WaterMark Certificate No: 23008 Global Tapware Pty Ltd

Aust. Standards. :Watermarked Lic. 23008

Mounting Hole : 32-35mm
All Meta Material : 304 Polished S/S
Working Press. : 500kpa. (NPC)
Max. Press. Rate : 1500kpa.
Operating Temp : 1 - 80^0 C.