‘Global STAINLESS’

HIDDEN Adj. BREACH HOB Tap – VARIOUS SPOUTS

Full 304 *STAINLESS STEEL* = Lead Free (LF)

Global Tapware Pty Ltd
E – info.tech@globaltapware.com
P – 07 38 55 2350
P – 1300 85 25 15
W- GLOBALTAPWARE.COM.AU

Products must be installed by registered Plumber in accordance with the PCA and AS/NZS3500.



STANDARD SPOUT:		
	Spout Length	**Part Number**
A	6” Long	**GS07G3006S**
B	8” Long	**GS07G3008S**
C	10” Long	**GS07G3010S**
D	12” Long	**GS07G3012S**
E	14” Long	**GS07G3014S**
F	16” Long	**GS07G3016S**

WELS Reg. T40510
3 Star / 9 lpm




GOOSENECK SPOUTS:		
	Spout Length	**Part Number**
A	6”x 9” Long	**GS07G31-6-9S**
B	8”x 12” Long	**GS07G31-8-12S**
C	9”x 12” Long	**GS07G31-9-12S**
	A x C	

WELS Reg. T40510
4 Star / 7.5 lpm

Keep swivel spout away from direct heat.

End Tap

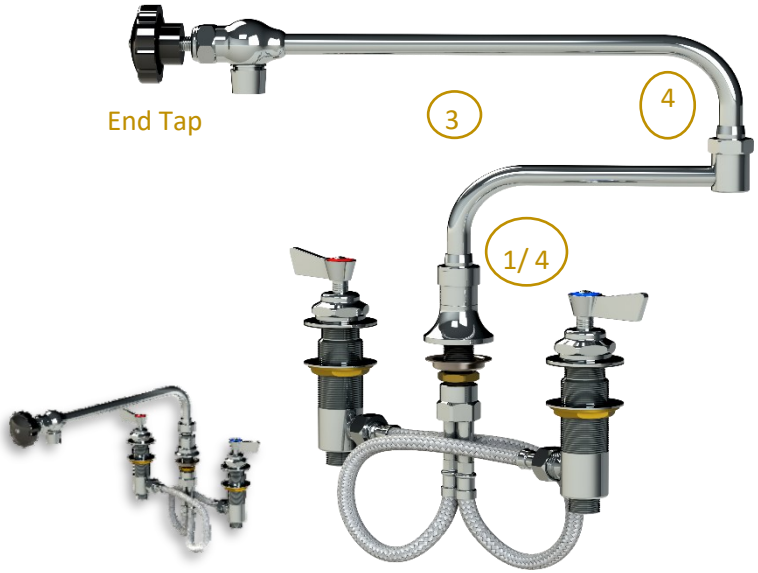

KETTLE / POT SPOUT:		
	Spout Length	**Part Number**
A	18” Double Swivel	**GS07G3518S**
B	24” Double Swivel	**GS07G3524S**
C	12” Single Swivel	**GS07G3512S**

WELS Reg. T40510
3 Star / 9 lpm

NOTE: All Parts are Replaceable Nationally via Plumbing Stores


1. **DROP N LOCK** = Lock Nut + 2 O’Rings
2. **Hot & / or Cold Repair Kits AVAILABLE**
3. **Polished S/S Swivel SPOUTS**
4. ***Replaceable O’Rings.***

WARRANTY: 36 months from Install date.


** **Australia’s first Commercial Stainless-Steel Tap & still the MOST Reliable on Market.**

AS3718 WaterMark Certificate No: 23008 Global Tapware Pty Ltd


TOP View

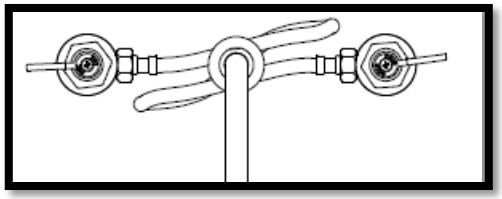


Tap Feed: – HOT & COLD

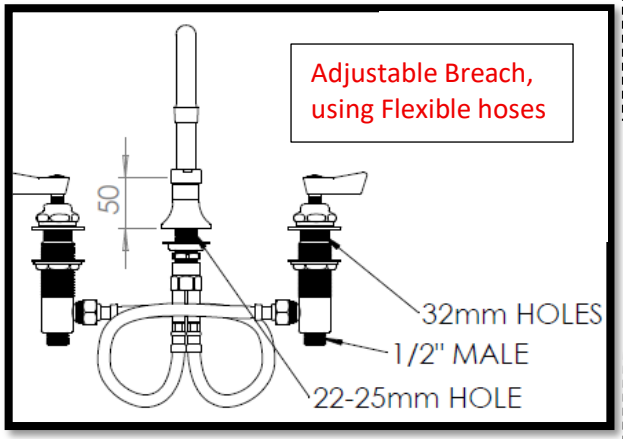


Standard Spout Front View

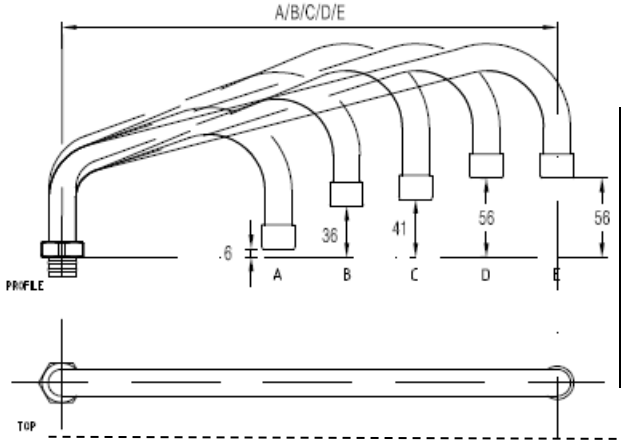


STANDARD SPOUTS		
	Pt. No.	LENGTH
A	G3006S	6”/179
B	G3008S	8”/227
C	G3010S	10”/276
D	G3012S	12”/326
E	G3014S	14”/376
F	G3016S	16”/400

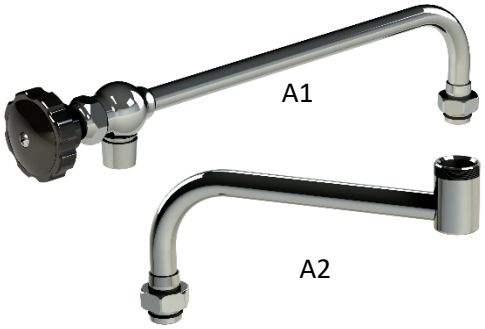


KETTLE / POT SPOUTS			
Part No.	A1	A2	1+2
G3524S			23”
G3518S			18”
G3511S	11”		
G3407S		7”	
G3412S		12”	

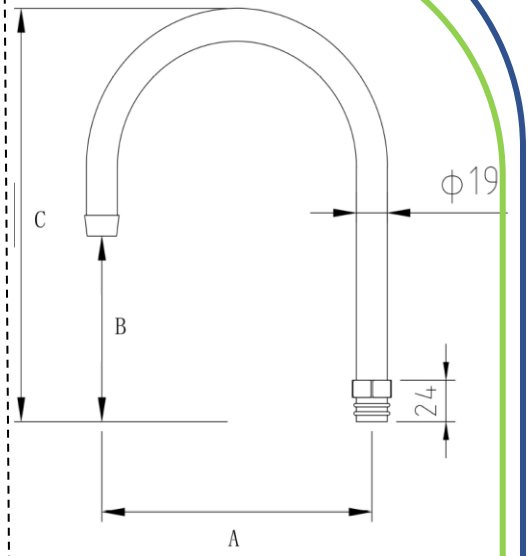


GOOSENECK SPOUTS			
Part No.	A	B	C
G31-6-9S	165	108	240
G31-8-12S	200	150	300
G31-9-12S	230	135	300

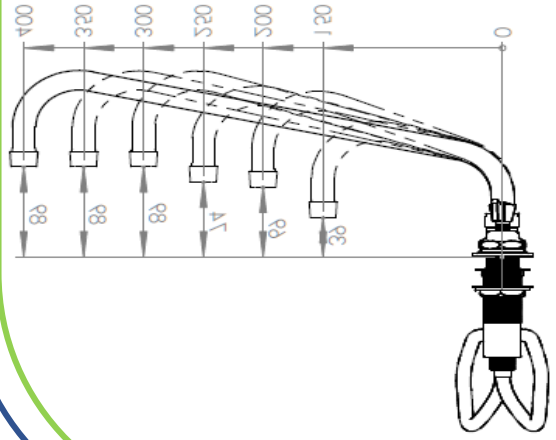

STANDARD SPOUT View

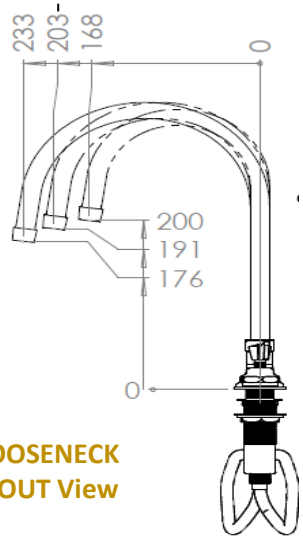

GOOSENECK SPOUT View

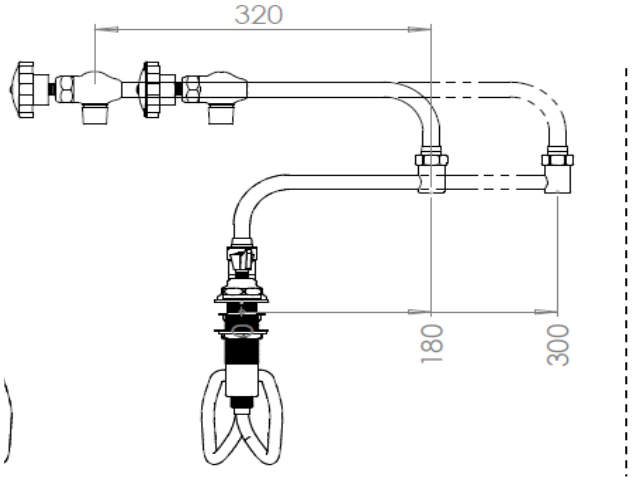

DOUBLE SWIVEL View

AS3718
WaterMark
Certificate No: 23008
Global Tapware Pty Ltd

Technical: -

Aust. Standards. :Watermarked Lic. 23008

Mounting Hole : 32 & 25mm
All Meta Material : 304 Polished S/S
Working Press. : 500kpa. (NPC)
Max. Press. Rate : 1500kpa.
Operating Temp : 1 - 80^0 C.