‘Global Fisher™’

Single HOB Pre-Rinses – POT FILLER

Made from 304 *STAINLESS STEEL* = Lead Free

Global Tapware Pty Ltd
E – info.tech@globaltapware.com
P – 07 38 55 2350
P – 1300 85 25 15
W- GLOBALTAPWARE.COM.AU


Tall
Adjustable
Midi
Cafe

Supplied with 12” / 300mm S/S Spout.

Other Spout Lengths available - see chart

* RO Units -see Separate Brochure

NEW Height Adjustable Pre-Rinse for when shelves get in the way

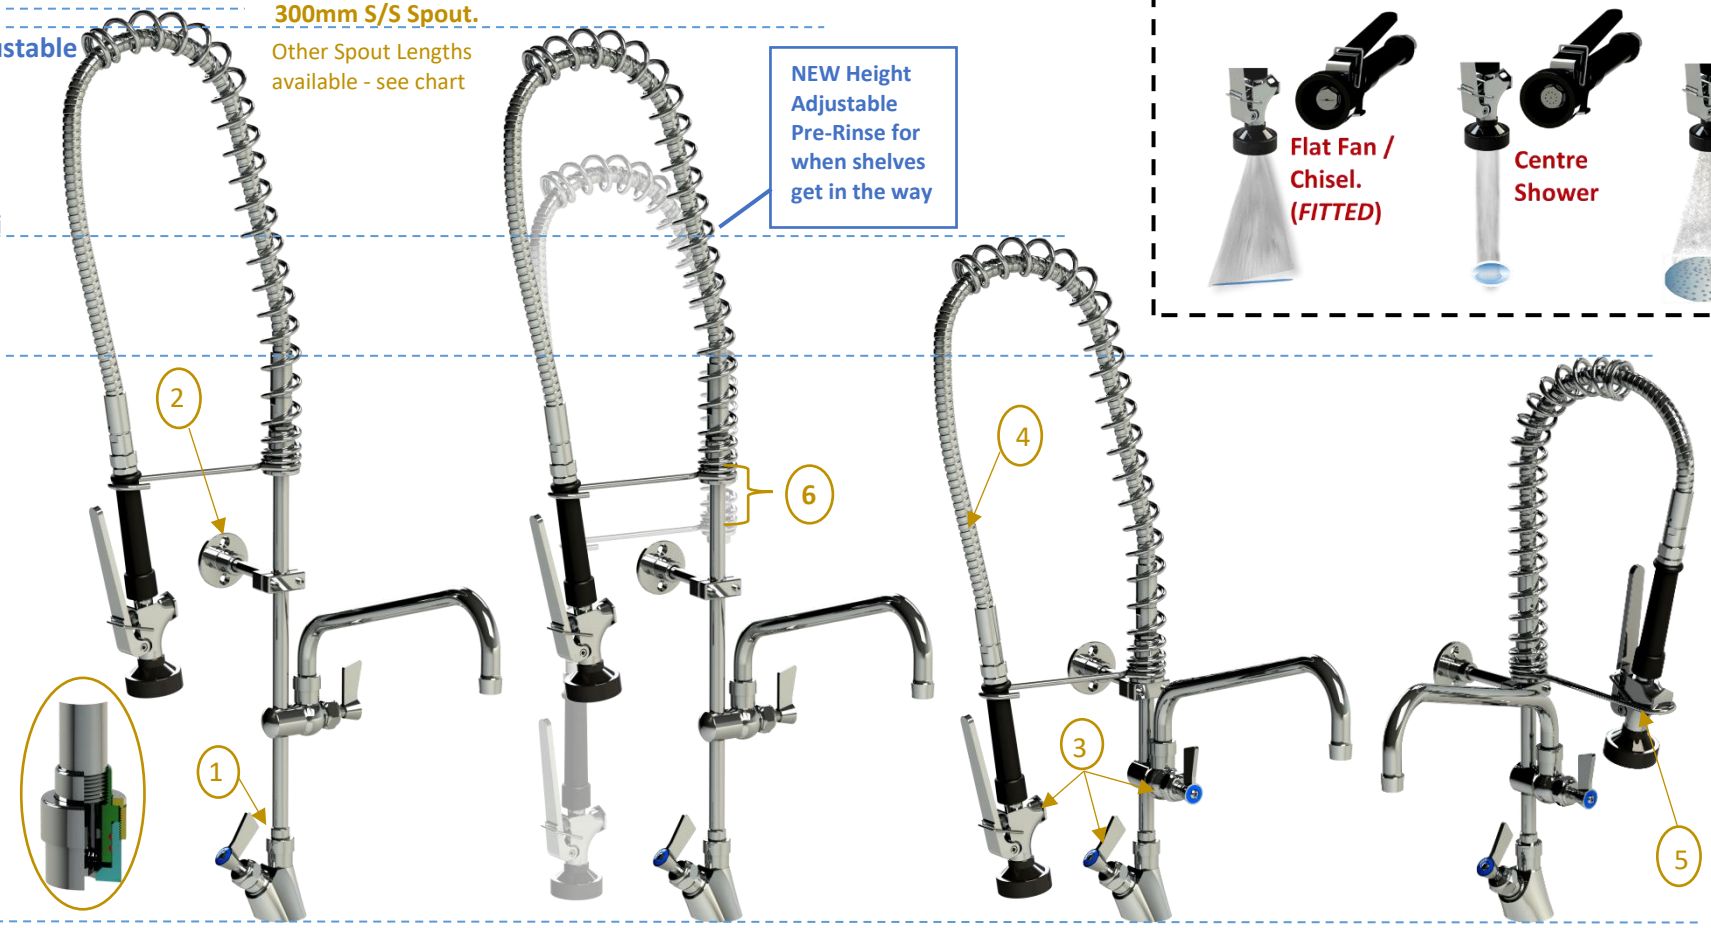

SPRAY GUN INTERCHANGABLE SPRAY TIPS

Flat Fan / Chisel. (*FITTED*)

Centre Shower

RO Water TIP - Low Atomized Shower

AS3718
WaterMark
Certificate No: 23008
Global Tapware Pty Ltd

WARRANTY:
36 months from Install date.

WATER RATING
www.waterrating.gov.au
4.5 litres per minute (spray tap)
Licence No. 0308
Second Outlet 3 star

TALL	*TALL - Adjustable*	*MIDI*	*Café / Short*
Pt. No. GF022512	**Pt. No. GF022512-A**	**Pt. No. GF022512-M**	**Pt. No. GF022512-C**

1. **DROP N LOCK =** fast assembly
2. **Adjustable Wall Bracket.**
3. **Repair Kits AVAILABLE**
4. **S/S Super Tuff Armour-flex w- ½” fi Swivel ends**
5. **Australia’s first Water Saving Spray Gun & still the MOST Reliable on Market.**
6. ***Adjustable Spring Retainer.*** The First in the World. Designed & Made in Australia by GT.

NOTE: All Parts are Replaceable Nationally via Plumbing Stores


SINGLE HOB Tap Feed: – HOT, COLD or MIXED

Products must be installed by registered Plumber in accordance with the PCA and AS/NZS3500.


SPOUT CHART - Tall Model
(applies to the other models w- suffix)

PART No.	MODEL	Length
GF022506	6”	150mm
GF022508	8”	200mm
GF022510	10”	250mm
GF022512	12”	300mm
GF022514	14”	350mm
GF022516	16”	400mm


TALL

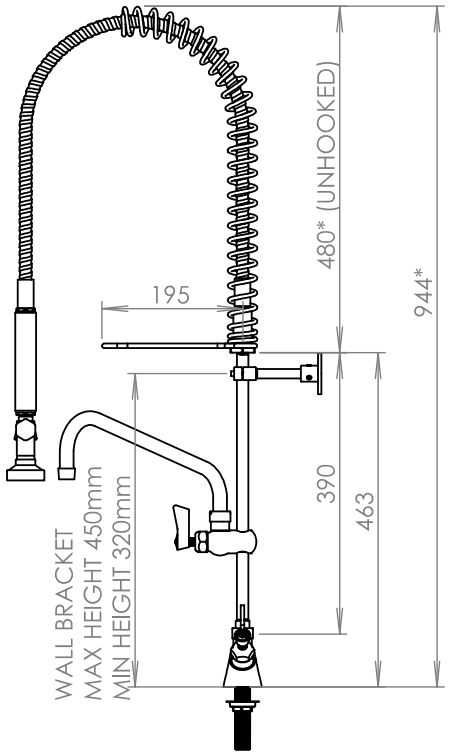


TALL - Adjustable

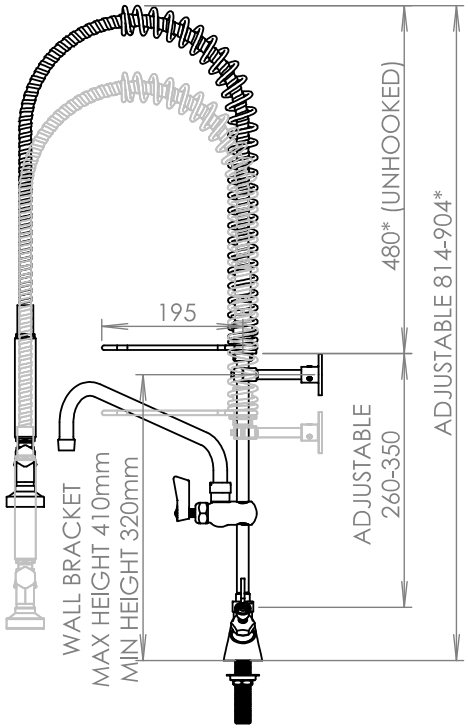


MIDI

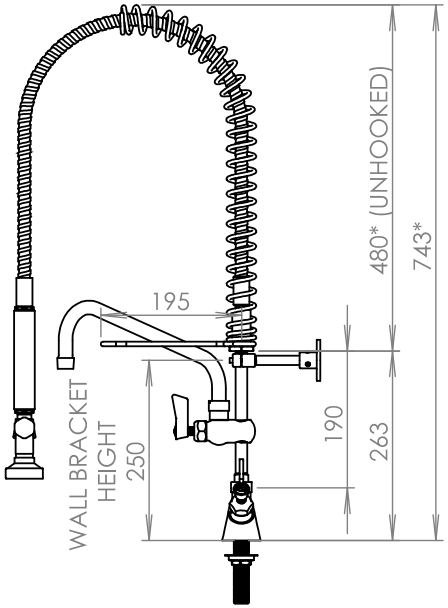


Café / SHORT

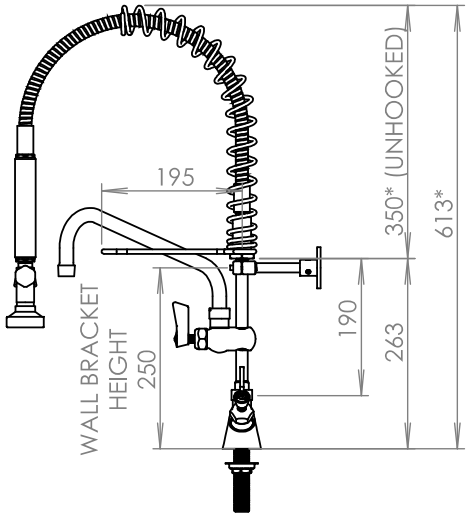


ISOMETRIC View

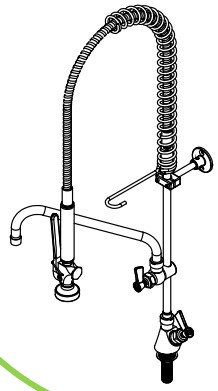

TOP View



FRONT View

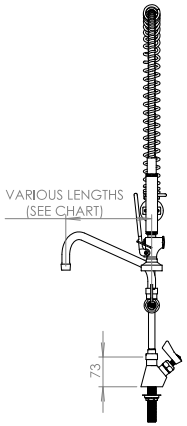


“KNUCKLE” -Sold separately. Pt. no. **G83KL**

Supplied with all ‘RO” Units only. The “*Knuckle*” allows for variable angles of secure fastening of the pre-rinses to wall.







Technical: -

Aust. Standards.	**: Watermarked**
“Lead Free”	**Lic. 23008**
WELS Reg. No.	**: TM41493**
1sts Outlet – SPRAY GUN	
WELS Rated	**: 6 Stars**
Flow Rate	**: 4.5 lpm**
2nd Outlet - SPOUT	: 9 lpm
Mounting Hole	**: 25mm**
All Metal Material	**: Polished 304** S/S
Working Press.	**: 500kpa.** (NPC)
Max. Press. Rate	**: 1500kpa.**
Operating Temp.	**: 1 - 80⁰ C.**