
‘Global Fisher™’

Single Hob Pre-Rinses w- Pot Filler

W- Thermostatic Tempering Valve

Pt. No. - **GF022512-TMV**

Available Now
The KNUCKLE. Allows Adjustable Wall Bracket Mounting System. Sold separately. **Pt. No. G83KL**

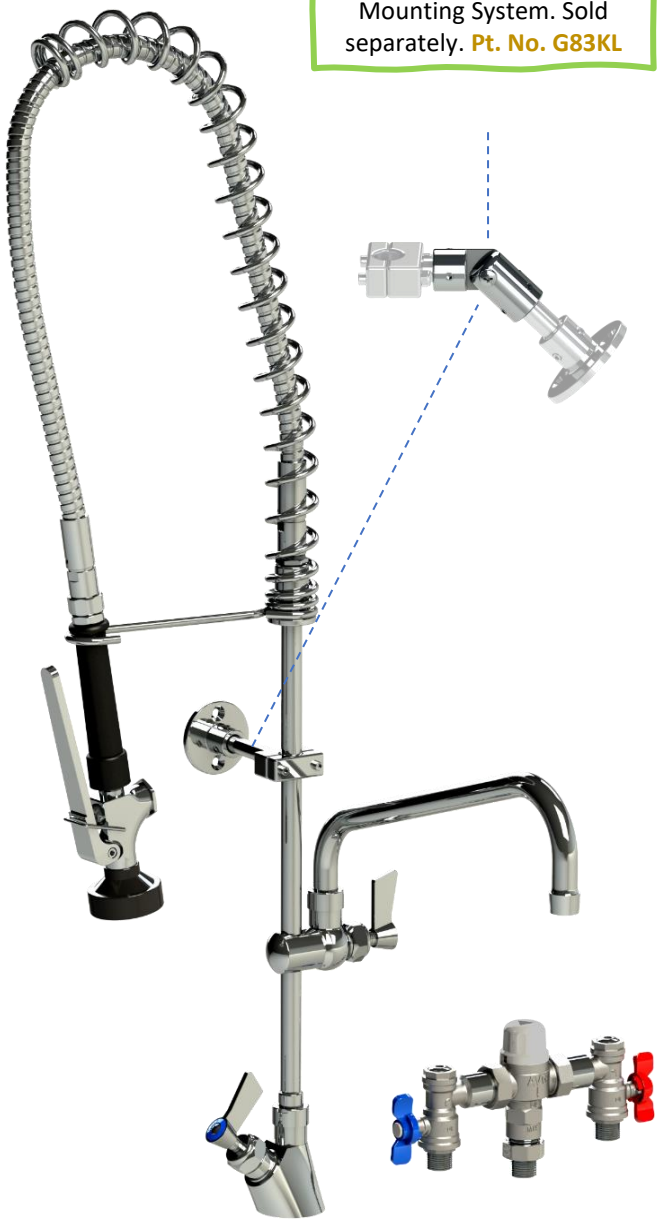

Key Features:

- **Premium Material**: Constructed from polished 304 stainless steel (S/S).
- **Inner Tube of Pre-Rinse Hose:** Santoprene rubber with S/S Braid cover and another S/S Spiral Sheath Protective outer.
- **Watermarked PR HOSE:** Separately Tested & passed to AS4020 & AS3499.
- **Safety & Convenience**: Squeeze lever with lock-on and quick-release shut-off (OH&S feature).
- **Riser Sub-Assembly**: Made & tested in our Brisbane Factory.
- **Interchangeable tips**: Other types of tips are available – see back page.
- A separate branded TMV is supplied with this unit – packed inside box.

WARRANTY:


- 36 Months for Commercial use


Technical: -

Australian Standards	**: Watermarked**
Lead Free	**Lic. 23008**
WELS Reg. No.	**TM41431**
1sts Outlet	**: Spray Gun**
WELS Rated	: **6 Stars**
Flow Rate	: **4.5 lpm**
2nd Outlet	**: Spout**
WELS Rated	: **3 Stars**
Flow Rate	: **9 lpm**
Tap Mounting Hole	: **25mm**
Material	: **304 S/S**
Tap Finish	: **Polished S/S**
TMV Finish	: **CP Brass**
Working Press.	: **500kpa.** (NPC)
Max. Press. rate	: **1500kpa.**
Tap Operating Temp	: **1 - 65^0 C.**
TMV Op. Temp.	: **Set by Plumber**


Global Tapware Pty Ltd
E – info.tech@globaltapware.com
P – 07 38 55 2350
P – 1300 85 25 15
W- **GLOBALTAPWARE.COM.AU**

Product must be installed by registered Plumber in accordance with the PCA and AS/NZS3500.

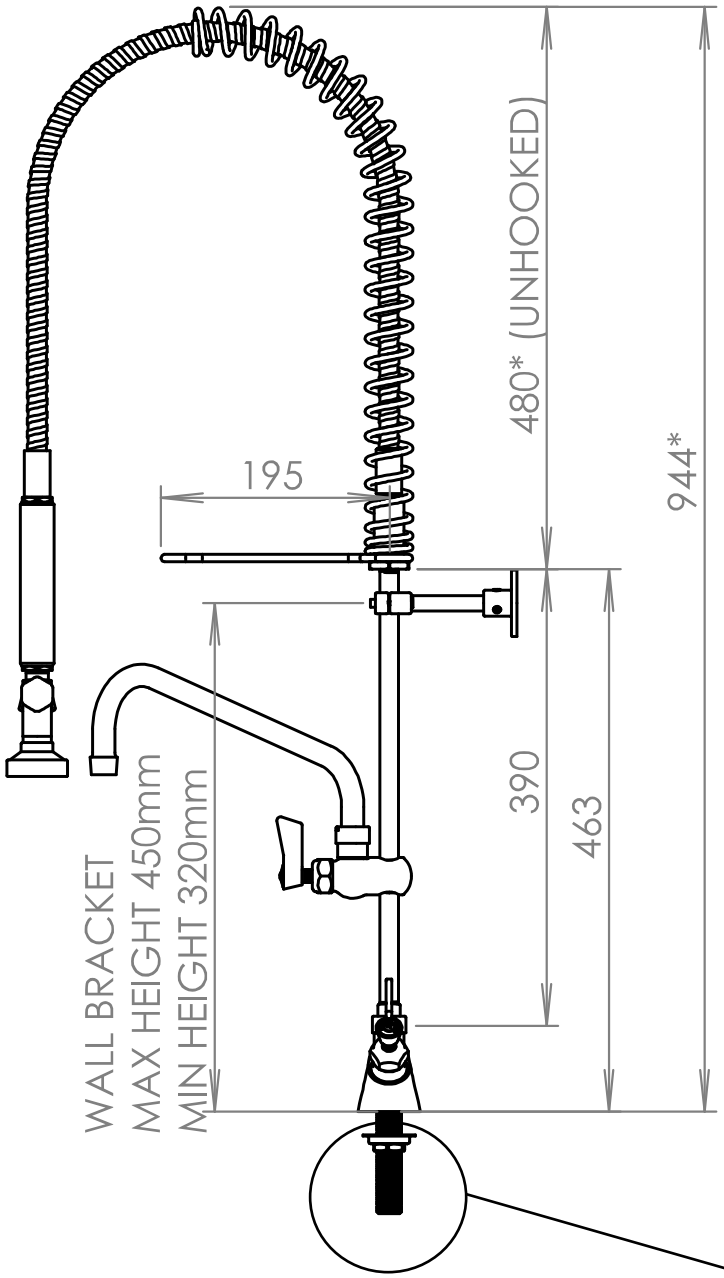

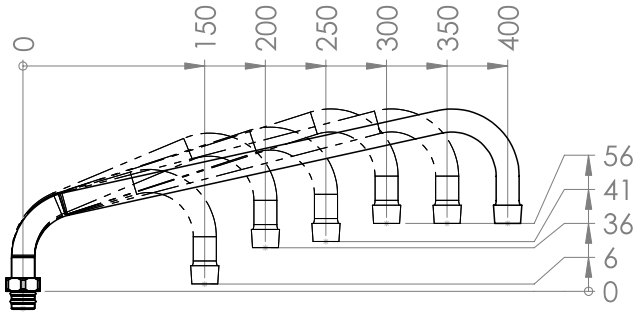

REF	LENGTH IN/MM	PART NO.
A	6" /179mm	GS3006
B	8" /227mm	GS3008
C	10" /276mm	GS3010
D	12" /326mm	GS3012
E	14" /376mm	GS3014

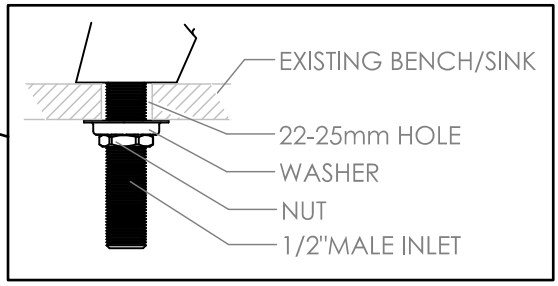

SPRAY GUN INTERCHANGABLE SPRAY TIPS

Spray Tip Supplied Fitted


FLAT FAN



Other Spray Tips Supplied

SHOWER



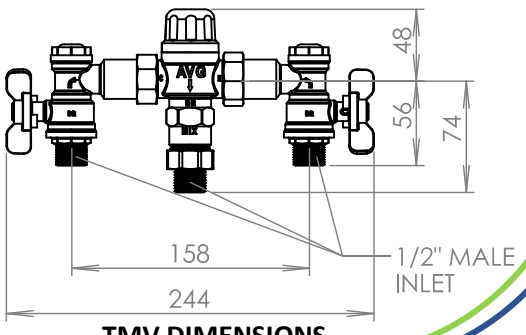

TMV DIMENSIONS