‘Global Fisher™’

Single DUAL Hob Pre-Rinses – POT FILLER

Made from 304 *STAINLESS STEEL* = Lead Free

Global Tapware Pty Ltd
E – info.tech@globaltapware.com
P – 07 38 55 2350
P – 1300 85 25 15
W- GLOBALTAPWARE.COM.AU

*RO Units - See Separate Brochure

Tall

Supplied with 12” / 300mm S/S Spout.

Other Spout Lengths available – see Chart

Adjustable

Midi

Cafe

NEW Height Adjustable Pre-Rinse for when shelves get in the way

SPRAY GUN INTERCHANGABLE SPRAY TIPS



Flat Fan / Chisel. (*FITTED*)

Centre Shower

RO Water TIP - Low Atomized Shower

AS3718 WaterMark
Certificate No: 23008
Global Tapware Pty Ltd

WARRANTY: 36 months from Install date.

WATER RATING www.waterrating.gov.au 4.5 litres per minute (spray tap) Licence No. 0308

TALL
Pt. No. GF032512

TALL - Adjustable
Pt. No. GF032512-A

MIDI
Pt. No. GF032512-M


Café
Pt. No. GF032512-C

1. **DROP N LOCK =** fast assembly
2. **Adjustable Wall Bracket.**
3. **Repair Kits AVAILABLE**
4. **S/S Super Tuff Armour-flex w- ½” fi Swivel ends**
5. **Australia’s first Water Saving Spray Gun & still the MOST Reliable on Market.**
6. ***Adjustable Spring Retainer.*** The First in the World. Designed & Made in Australia by GT.


NOTE: All Parts are Replaceable Nationally via Plumbing Stores

SINGLE DUAL Tap Feed: – HOT & COLD

TALL

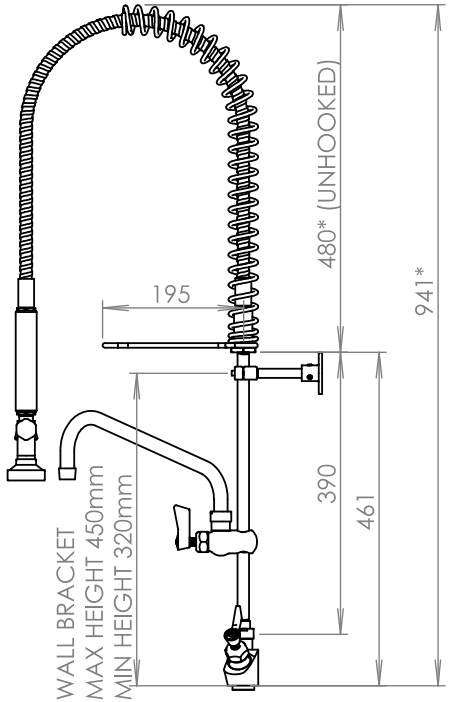


TALL - Adjustable

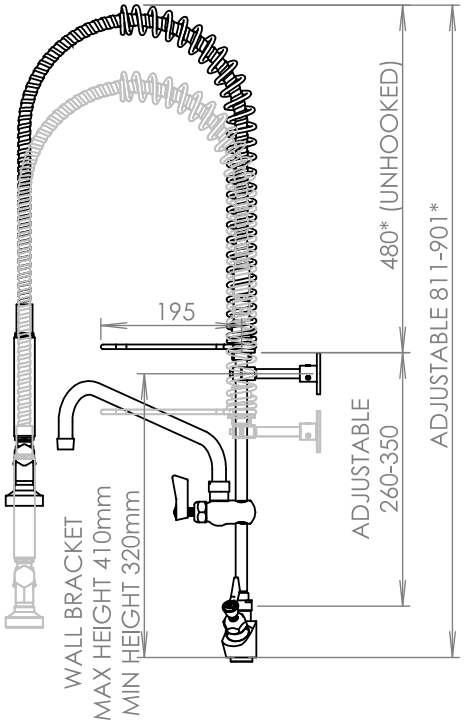


Products must be installed by registered Plumber in accordance with the PCA and

MIDI

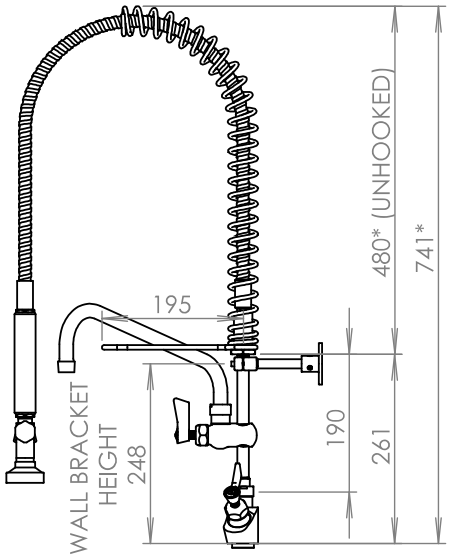


SPOUT CHART - Tall Model (applies to the other models w- suffix)		
PART No.	**MODEL**	**Length**
GF032506	6”	150mm
GF032508	8”	200mm
GF032510	10”	250mm
GF032512	12”	300mm
GF032514	14”	350mm
GF032516	16”	400mm


Café / SHORT

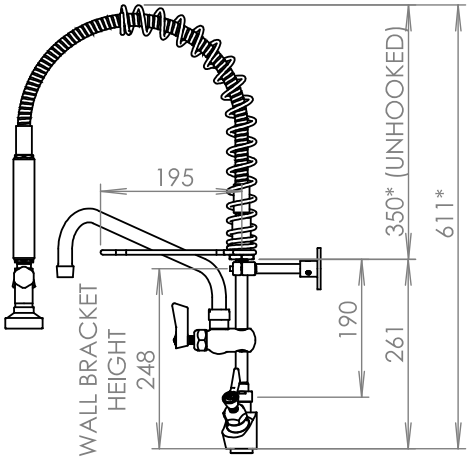


ISOMETRIC View

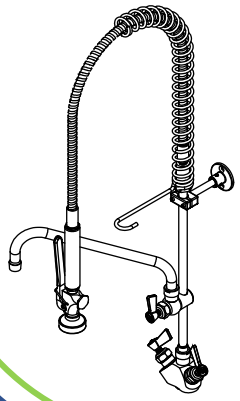

TOP View



FRONT View

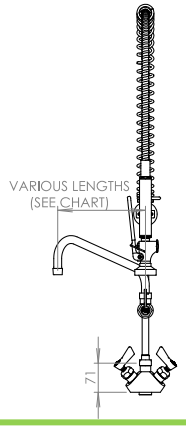


“KNUCKLE” -Sold separately. Pt. no. **G83KL**

Supplied with all ‘RO” Units only. The “*Knuckle*” allows for variable angles of secure fastening of the pre-rinses to wall.



Mounting





Technical: -

Aust. Standards.	**:Watermarked**
“LEAD FREE”	**Lic. 23008**
WELS Reg. No.	**: T14468**
1sts Outlet Spray Gun:	
WELS Rated	**: 6 Stars**
Flow Rate	**: 4.5 lpm**
2nd Outlet Flow Rate - Spout	**: 9 lpm**
Mounting Hole	**: 32mm**
All Metal Material	**: Polished 304 S/S**
Working Press.	**: 500kpa.** (NPC)
Max. Press. Rate	**: 1500kpa.**
Operating Temp	**: 1 - 65^{0} C.**

Inlet Hoses Specify this Temperature.