‘Global Fisher™’

Exposed Breach Hob Pre-Rinses- POT FILLER

Made from 304 ***STAINLESS STEEL*** = Lead Free

Global Tapware Pty Ltd
E – info.tech@globaltapware.com
P – 07 38 55 2350
P – 1300 85 25 15
W- GLOBALTAPWARE.COM.AU

Tall

Adjustable

Midi

Cafe

Supplied with 12” / 300mm S/S Spout.

Other Spout Lengths available – See chart

NEW Height Adjustable Pre-Rinse for when shelves get in the way

SPRAY GUN INTERCHANGABLE SPRAY TIPS




Flat Fan / Chisel. (*FITTED*)




Centre Shower



RO Water TIP - Low Atomized Shower

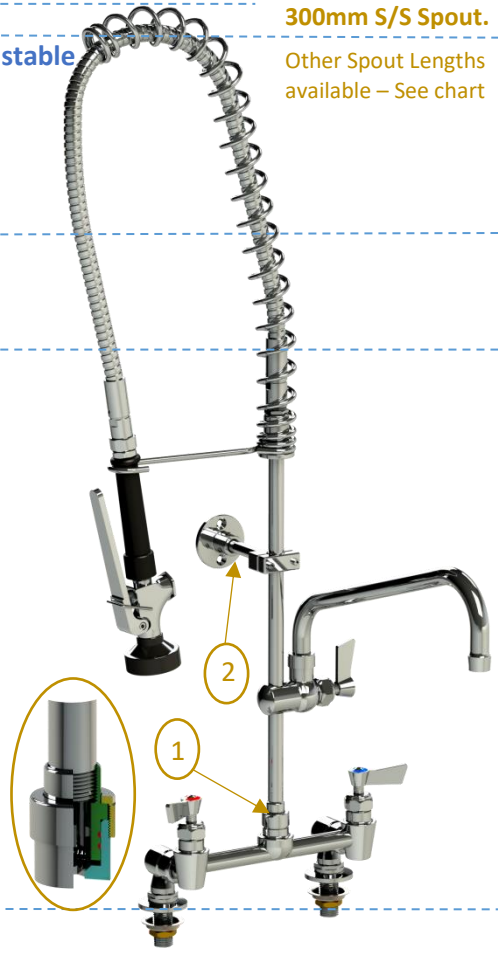

TALL
Pt. No. GF042512

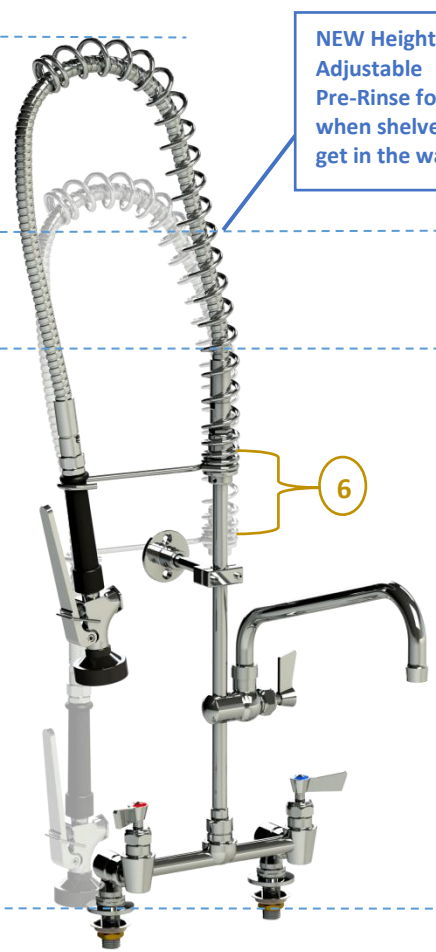

TALL - Adjustable
Pt. No. GF042512-A



MIDI
Pt. No. GF042512-M



Café
Pt. No. GF042512-C

AS3718
WaterMark
Certificate No: 23008
Global Tapware Pty Ltd

WARRANTY:
36 months from Install date.

WATER RATING
www.waterrating.gov.au
4.5 litres per minute (spray tap)
Licence No. 0308
3 star

1. **DROP N LOCK =** fast assembly
2. **Adjustable Wall Bracket.**
3. **Repair Kits AVAILABLE**
4. **S/S Super Tuff Armour-flex w- ½” fi Swivel ends**
5. **Australia’s first Water Saving Spray Gun & still the MOST Reliable on Market.**
6. ***Adjustable Height.*** The First in the World. Designed & Made in Australia by GT.

NOTE: All Parts are Replaceable Nationally via Plumbing Stores


FIXED EXPOSED BREACH – HOB – Dual Feed: – HOT & COLD

Products must be installed by registered Plumber in accordance with the PCA and AS/NZS3500.


SPOUT CHART - Tall Model
(applies to the other models w- suffix)

PART No.	MODEL	Length
GF042506	6”	150mm
GF042508	8”	200mm
GF042510	10”	250mm
GF042512	12”	300mm
GF042514	14”	350mm
GF042516	16”	400mm


TALL

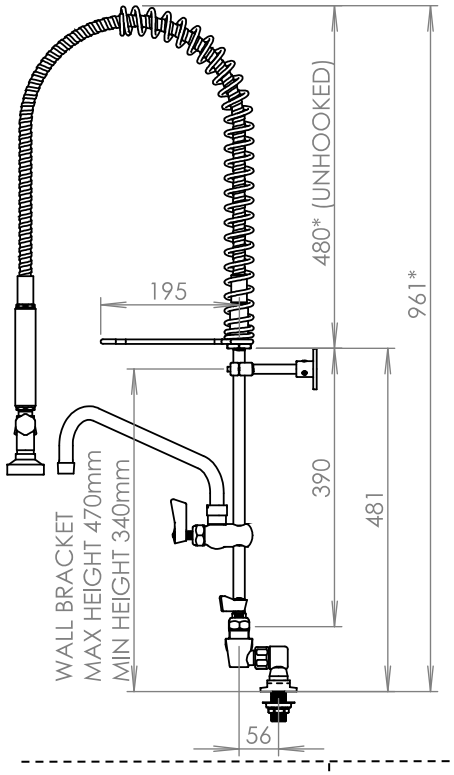


TALL - Adjustable

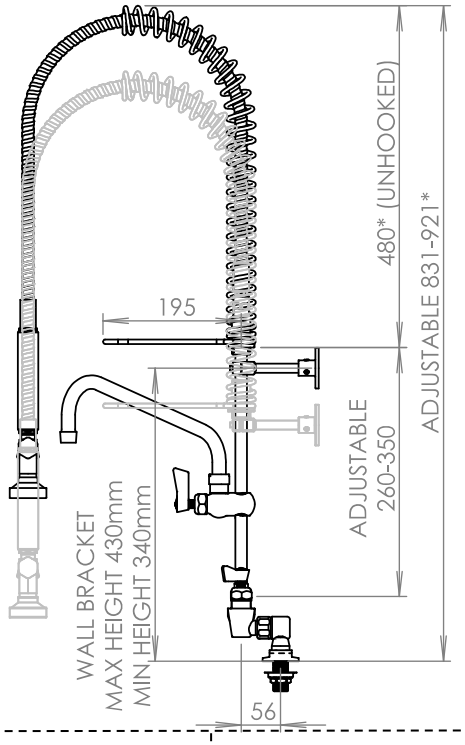


MIDI

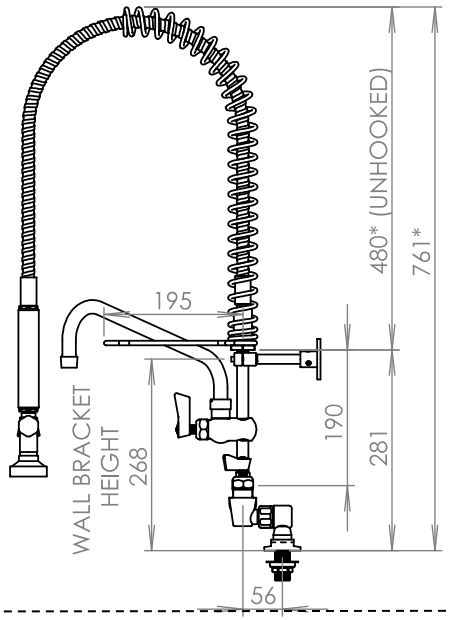


Café / Short

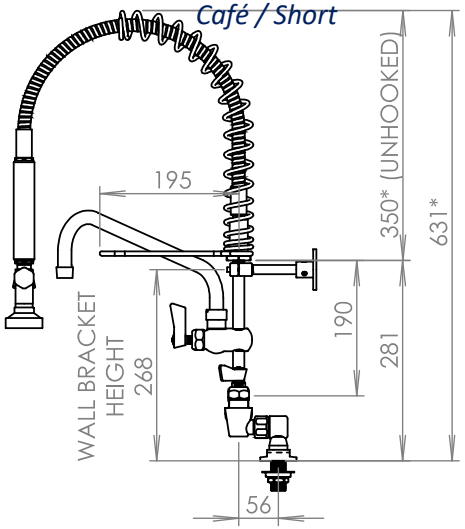


ISOMETRIC View

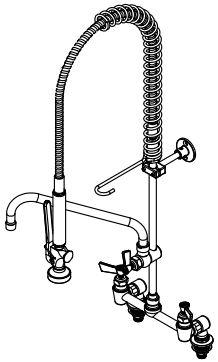

TOP View

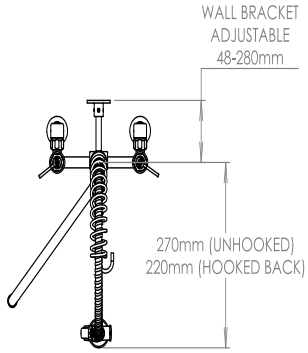

FRONT View

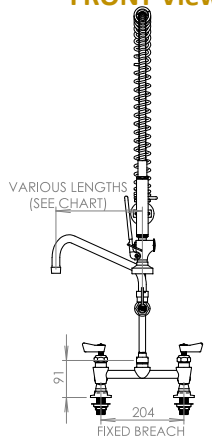


“KNUCKLE” -Sold separately. Pt. no. G83KL

Supplied with all ‘RO” Units only. The “*Knuckle*” allows for variable angles of secure fastening of the pre-rinses to wall.





MOUNT View



Technical: -

Aust. Standards.	**: Watermarked**
“Lead Free”	**Lic. 23008**
WELS Reg. No.	**: TM41647**
1sts Outlet Spray Gun:	
WELS Rated	**: 6 Stars**
2nd Outlet Flow Rate	**: 4.5 lpm**
Flow Rate -	**: 9 lpm**
Mounting Hole	**:25mm**
All Metal Material	**: Polished 304 S/S**
Working Press.	**:500kpa.** (NPC)
Max. Press. Rate	**:1500kpa.**
Operating Temp	**:1 - 80⁰ C.**