‘Global Fisher™’

Hidden Breach Hob Pre-Rinses – POT FILLER

Made from 304 ***STAINLESS STEEL*** = Lead Free (LF)

Global Tapware Pty Ltd
E – info.tech@globaltapware.com
P – 07 38 55 2350
P – 1300 85 25 15
W- GLOBALTAPWARE.COM.AU

Tall

Adjustable

Midi

Cafe

Supplied with 12”/ 300mm S/S Spout.
Other Spout Lengths available – see chart

NEW Height Adjustable Pre-Rinse for when shelves get in the way

SPRAY GUN INTERCHANGABLE SPRAY TIPS




Flat Fan / Chisel. (*FITTED*)




Centre Shower




RO Water TIP - Low Atomized Shower

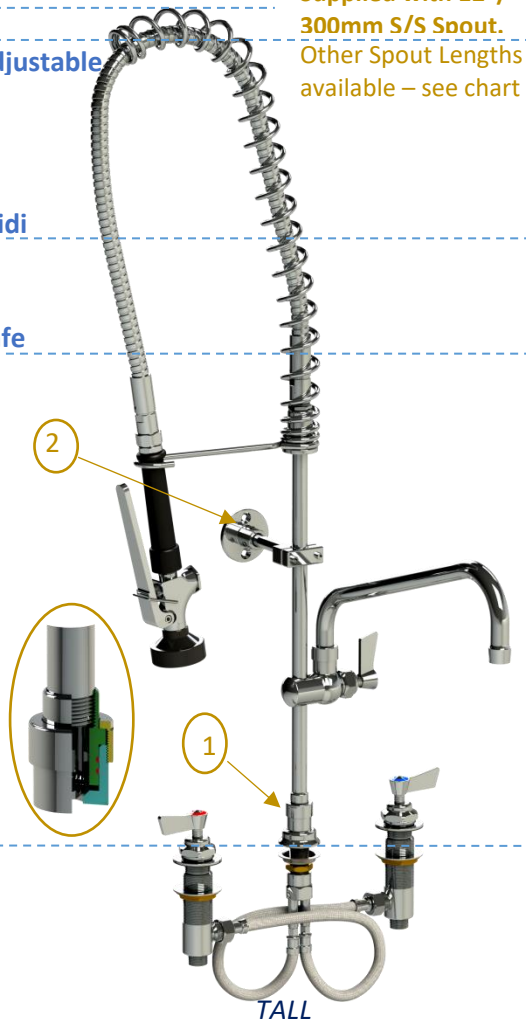

TALL
Pt. No. GF072512

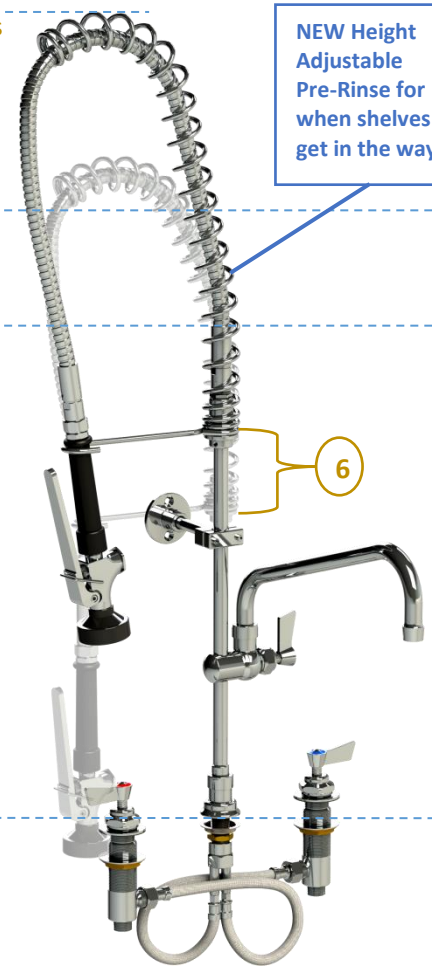

TALL - Adjustable
Pt. No. GF072512-A

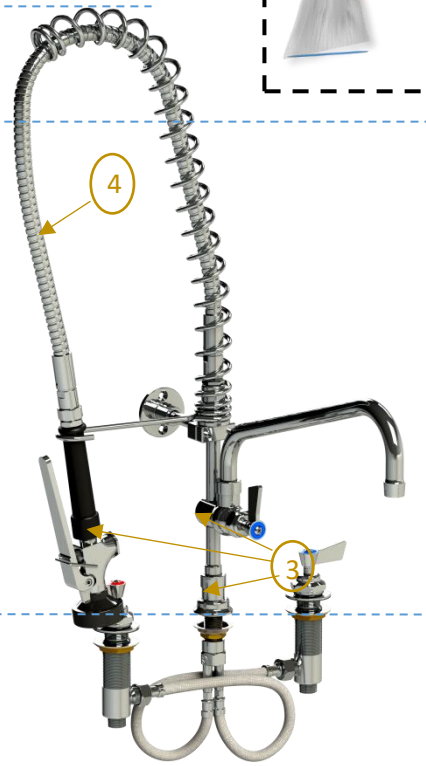

MIDI
Pt. No. GF072512-M



Café
Pt. No. GF072512-C

AS3718
WaterMark
Certificate No: 23008
Global Tapware Pty Ltd

WARRANTY:
36 months from Install date.

WATER RATING
www.waterrating.gov.au
4.5 litres per minute (spray tap)
Licence No. 0308

1. **DROP N LOCK =** fast assembly
2. **Adjustable Wall Bracket.**
3. **Repair Kits AVAILABLE**
4. **S/S Super Tuff Armour-flex w- ½” fi Swivel ends**
5. **Australia’s first Water Saving Spray Gun & still the MOST Reliable on Market.**
6. ***Adjustable Spring Retainer.*** The First in the World. Designed & Made in Australia by GT.


NOTE: All Parts are Replaceable Nationally via Plumbing Stores

Hidden Breach Hob Feed: – HOT & COLD


Products must be installed by registered Plumber in accordance with the PCA and AS/NZS3500.

SPOUT CHART - Tall Model (applies to the other models w- suffix)		
PART No.	**MODEL**	**Length**
GF072506	6”	150mm
GF072508	8”	200mm
GF072510	10”	250mm
GF072512	12”	300mm
GF072514	14”	350mm
GF072516	16”	400mm


TALL

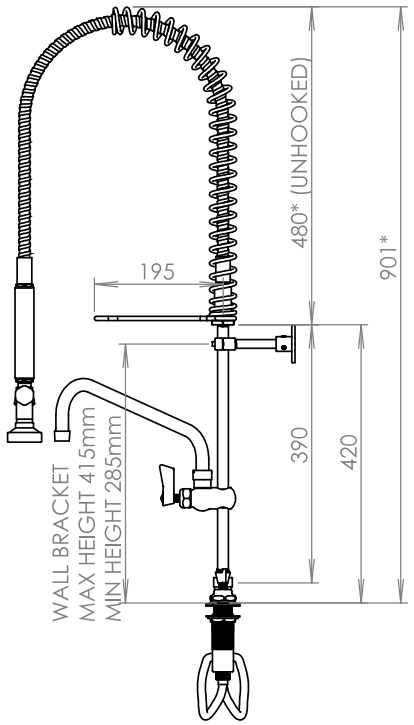


TALL - Adjustable

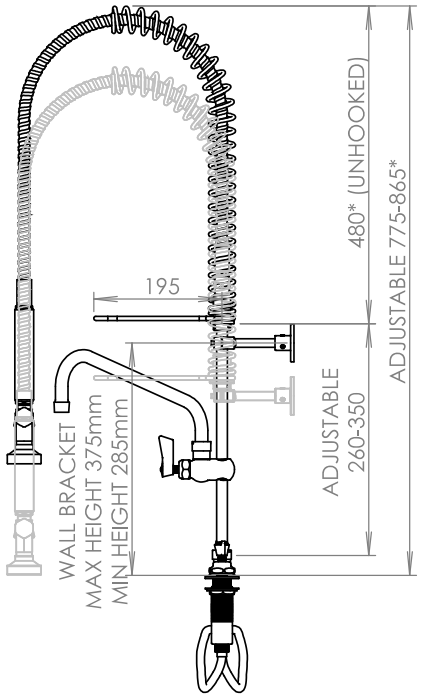


MIDI

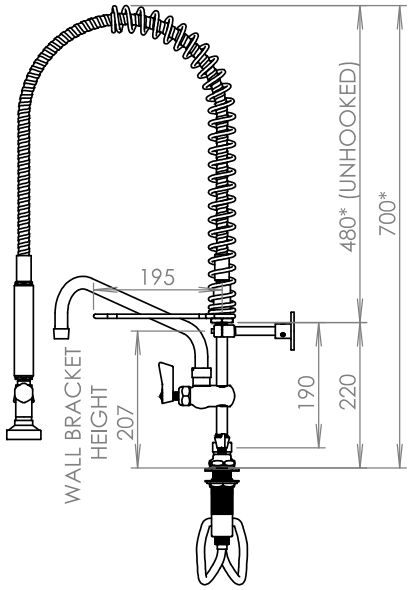


Café / Short

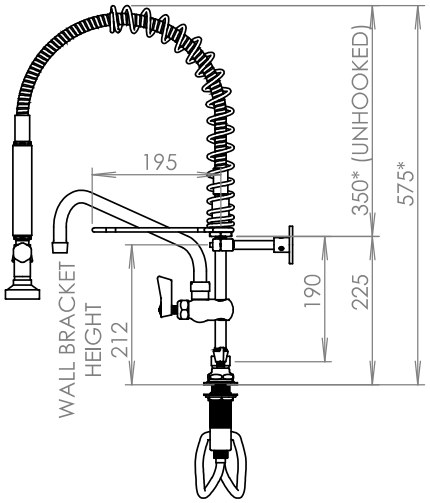


ISOMETRIC View

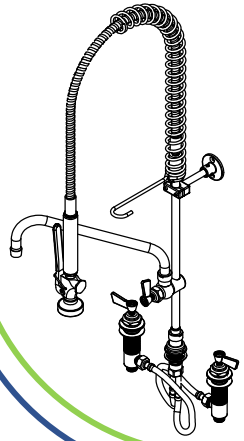

TOP View



FRONT View

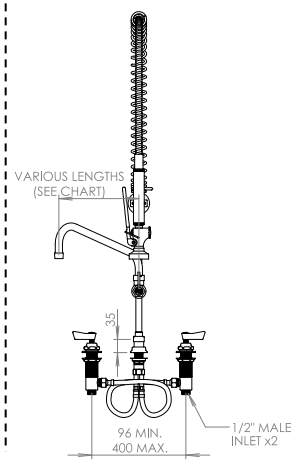


“KNUCKLE” -Sold separately. Pt. no. **G83KL**

Supplied with all ‘RO” Units only. The “*Knuckle*” allows for variable angles of secure fastening of the pre-rinses to wall.



MOUNT View

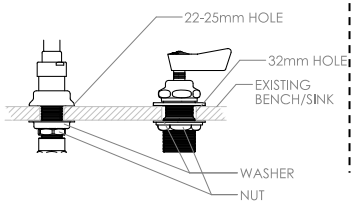



Technical: -

Aust. Standards.	**: Watermarked**
“LEAD FREE”	**Lic. 23008**
WELS Reg. No.	**: TM41648**
1sts Outlet Spray Gun:	
WELS Rated	**:6 Stars**
Flow Rate	**:4.5 lpm**
2nd Outlet – SPOUT	**:9 lpm**
Mounting Hole	**:25mm**
All Metal Material	**: Polished 304 S/S**
Working Press.	**:500kpa.** (NPC)
Max. Press. Rate	**:1500kpa.**
Operating Temp	**:1 - 80⁰ C.**