# ‘Global Fisher™’

## Fixed Breach, Adj Union WALL TAP
## Pre-Rinses – STANDARD

**Made from 304 STAINLESS *STEEL* = Lead Free (LF)**



**Global Tapware Pty Ltd**
**E –** info.tech@globaltapware.com
**P** – 07 38 55 2350
**P** – 1300 85 25 15
**W- GLOBALTAPWARE.COM.AU**


*RO Units – See Separate brochure


Tall
Adjustable
Midi
Cafe

NEW Height Adjustable Pre-Rinse for when shelves get in the




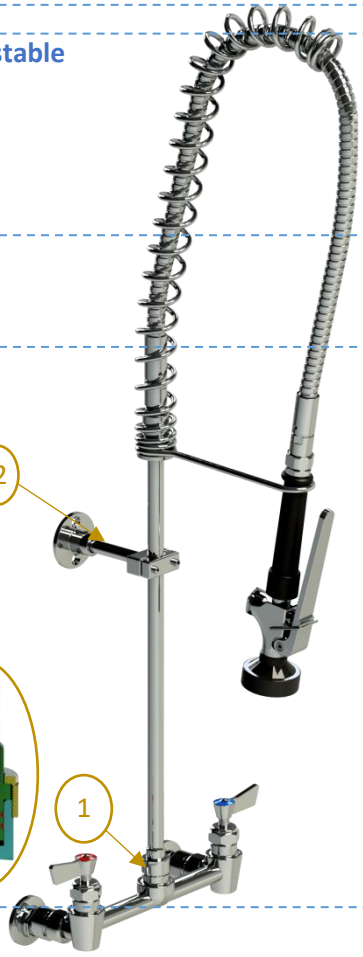


*TALL*
**Pt. No. GF152100**

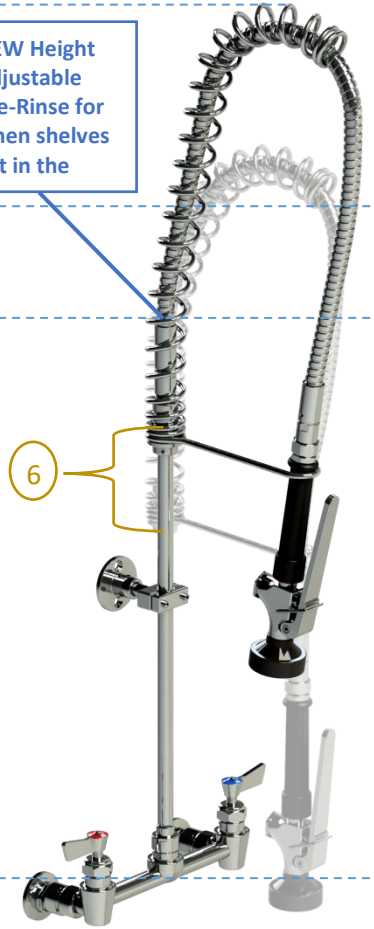


*TALL - Adjustable*
**Pt. No. GF152100-A**

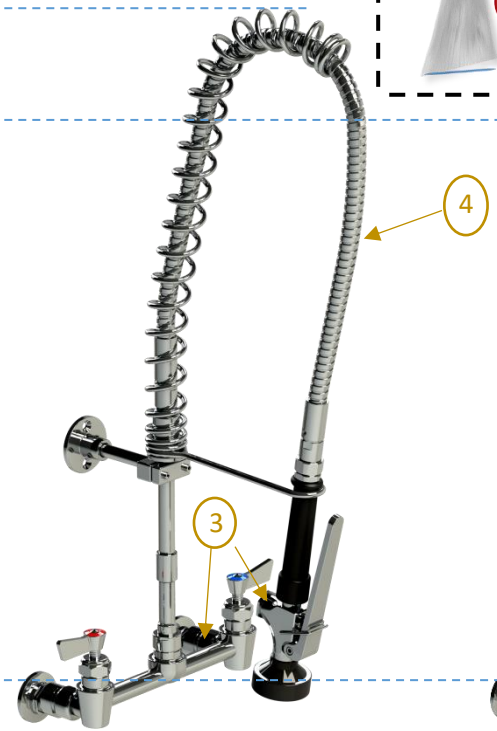


*MIDI*
**Pt. No. GF152100-M**




*Café*
**Pt. No. GF152100-C**

### SPRAY GUN INTERCHANGABLE SPRAY TIPS



Flat Fan / Chisel. (*FITTED*)



Centre Shower



RO Water TIP - Low Atomized Shower

AS3718
**WaterMark**
Certificate No: 23008
Global Tapware Pty Ltd

**WARRANTY:**
36 months from Install date.


WATER RATING
www.waterrating.gov.au
**4.5** litres per minute (spray tap)
Licence No. 0308

1. **DROP N LOCK =** fast assembly
2. **Adjustable Wall Bracket.**
3. **Repair Kits AVAILABLE**
4. **S/S Super Tuff Armour-flex w- ½” fi Swivel ends**
5. **Australia’s first Water Saving Spray Gun & still the MOST Reliable on Market.**
6. ***Adjustable Height Spring Retainer.*** The First in the World. Designed & Made in Australia by GT.


**NOTE: All Parts are Replaceable Nationally via Plumbing Stores**

# Exposed Breach WALL Tap Feed: – HOT & COLD


### TALL

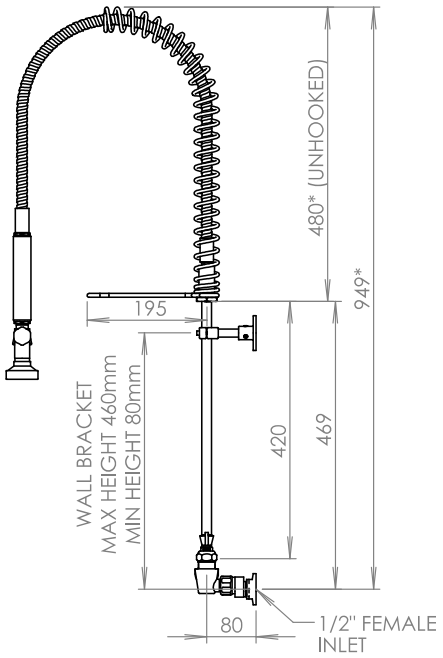


### TALL - Adjustable

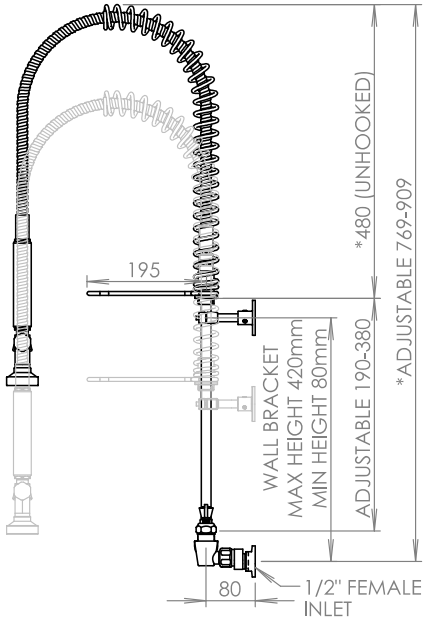



### MIDI

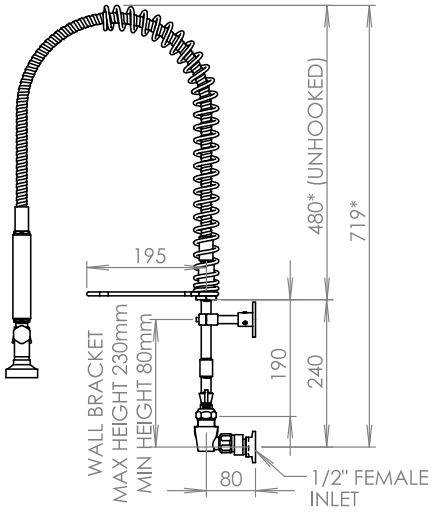



Product must be installed by registered Plumber in accordance with the PCA and AS/NZS3500.


### SHORT – Café

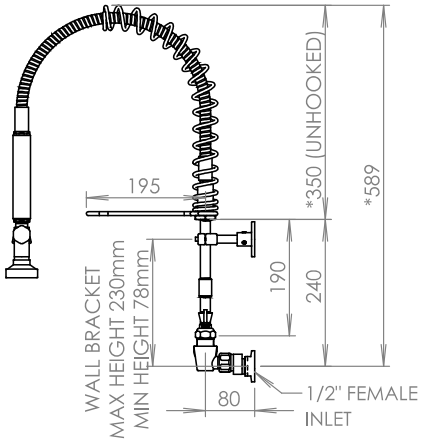



### ISOMETRIC View

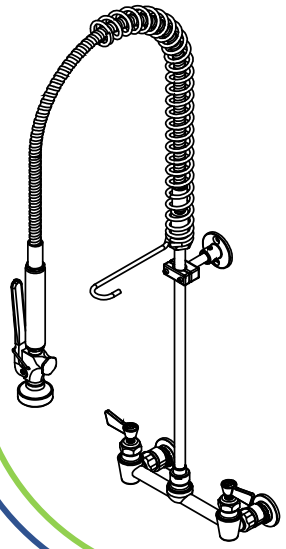

### TOP View

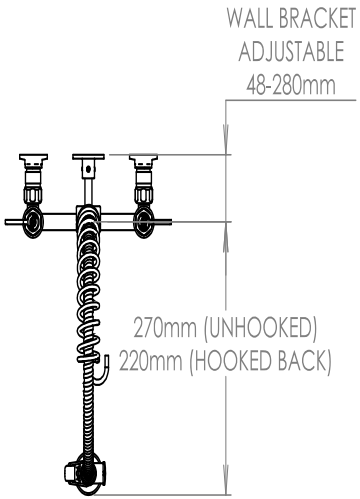


### FRONT View

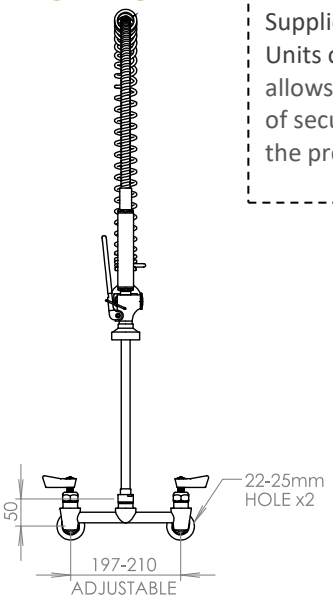


***"KNUCKLE"*** -Sold separately. Pt. no. **G83KL**

Supplied with all 'RO" Units only. The "*Knuckle*" allows for variable angles of secure fastening of the pre-rinses to wall.





## Technical: -

| | |
|---|---|
| **Aust. Standards.** | **: Watermarked** |
| **"LEAD FREE"** | **Lic. 23008** |
| **WELS Reg. No.** | **: TM41500** |
| **1sts Outlet Spray Gun:** | |
| WELS Rated | : **6 Stars** |
| Flow Rate | : **4.5 lpm** |
| Mounting Hole | : **25mm x 2** |
| All Metal Material | : **Polished 304 S/S** |
| Working Press. | : **500kpa.** (NPC) |
| Max. Press. Rate | : **1500kpa.** |
| Operating Temp | : **1 - 80⁰ C.** |