‘Global Fisher™’

Exposed Adj. Breach Wall Pre-Rinses w– Elbow POT FILLER

Made from 304 *STAINLESS STEEL* = Lead Free (LF)


Global Tapware Pty Ltd
E – info.tech@globaltapware.com
P – 07 38 55 2350
P – 1300 85 25 15
W- GLOBALTAPWARE.COM.AU

Tall
Adjustable
Midi
Cafe

Supplied with 12” / 300mm S/S Spout.
Other Spout Lengths available – see chart

* RO Units - See Separate Brochure

NEW Height Adjustable Pre-Rinse for when shelves get in the way

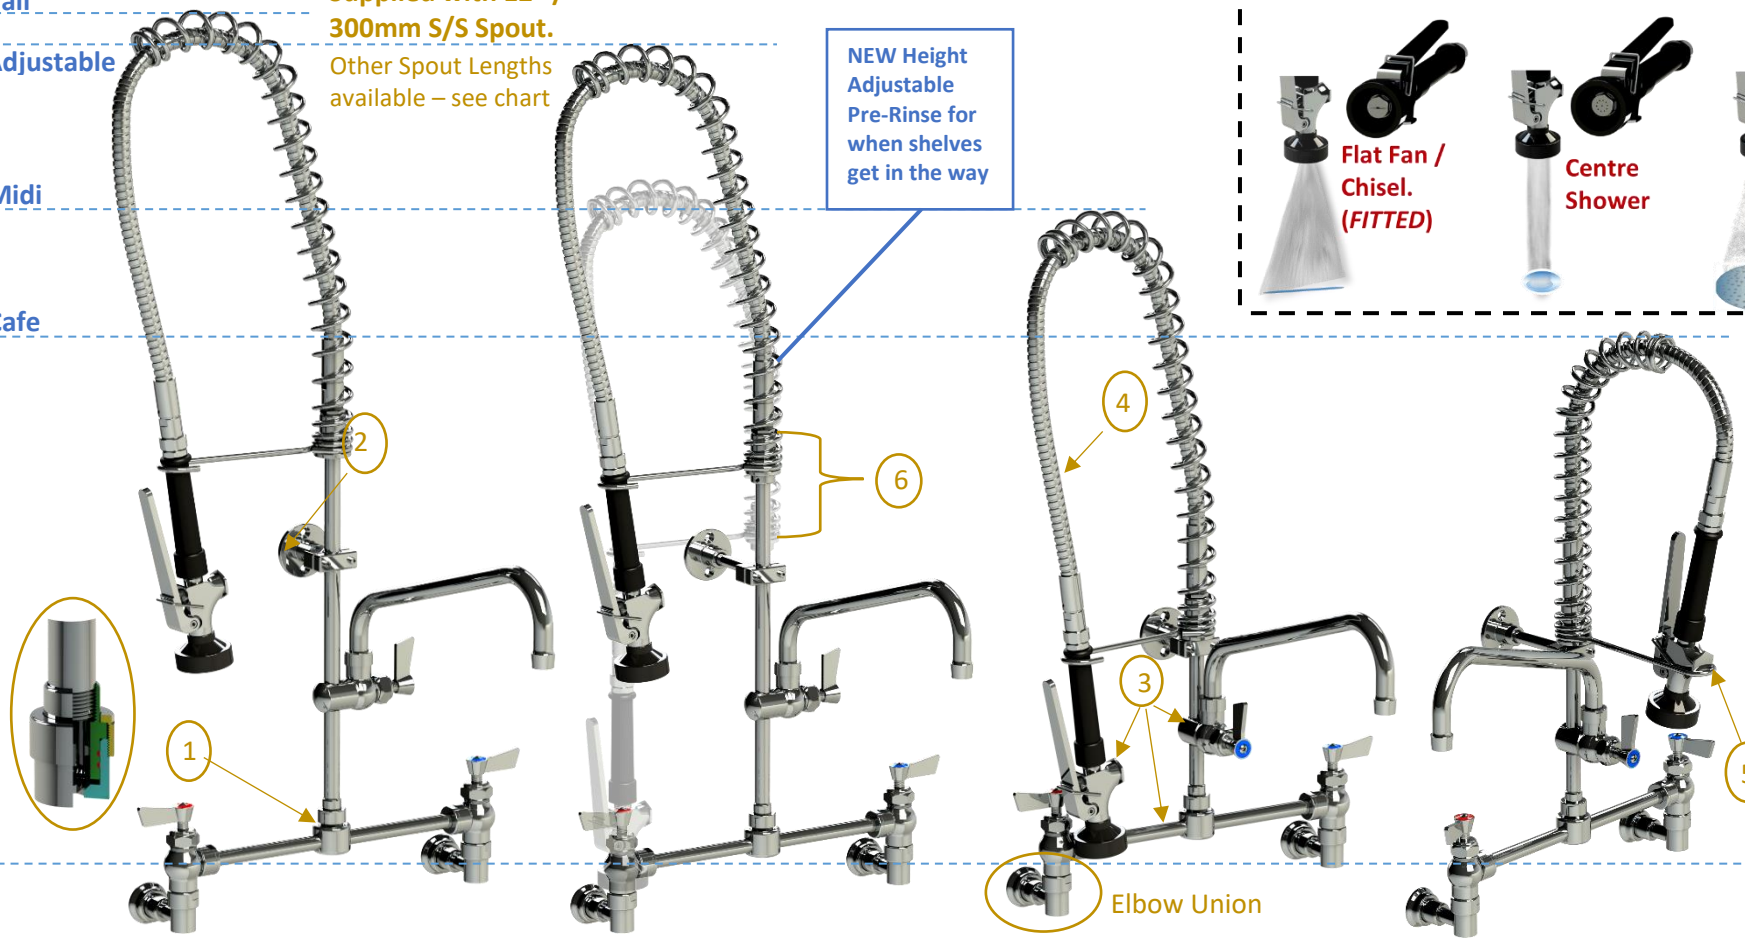

SPRAY GUN INTERCHANGABLE SPRAY TIPS

AS3718 WaterMark
Certificate No: 23008
Global Tapware Pty Ltd

WARRANTY:
36 months from Install date.

WATER RATING 4.5 litres per minute (spray tap) Licence No. 0308

TALL
Pt. No. GF152512AB

TALL - Adjustable
Pt. No. GF152512AB-A

MIDI
Pt. No. GF152512AB-M

Café
Pt. No. GF152512AB-C

1. **DROP N LOCK =** fast assembly
2. **Adjustable Wall Bracket.**
3. **Repair Kits AVAILABLE**
4. **S/S Super Tuff Armour-flex w- ½” fi Swivel ends**
5. **Australia’s first Water Saving Spray Gun & still the MOST Reliable on Market.**
6. ***Adjustable Height Spring Retainer.*** The First in the World. Designed & Made in Australia by GT.


NOTE: All Parts are Replaceable Nationally via Plumbing Stores

Exposed Adj. Breach Tap Feed: – HOT & COLD


SPOUT CHART - Tall Model (applies to the other models w- suffix)		
PART No.	**MODEL**	**Length**
GF152506AB	6”	150mm
GF152508AB	8”	200mm
GF152510AB	10”	250mm
GF152512AB	12”	300mm
GF152514AB	14”	350mm
GF152516AB	16”	400mm

Products must be installed by registered Plumber in accordance with the PCA and AS/NZS3500.


TALL

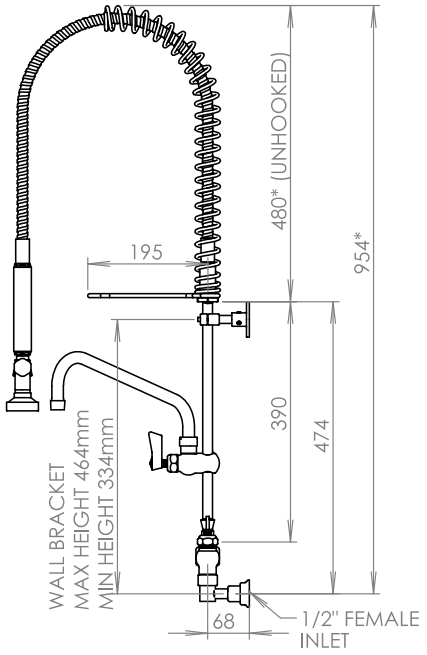


TALL - Adjustable

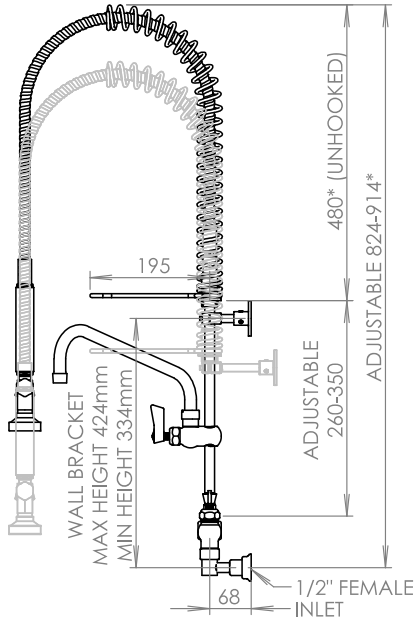


MIDI

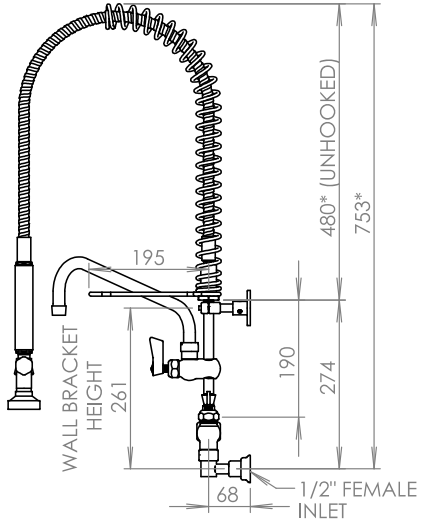


SHORT – Café

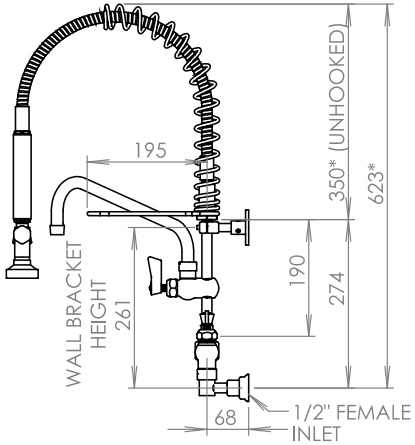


ISOMETRIC View

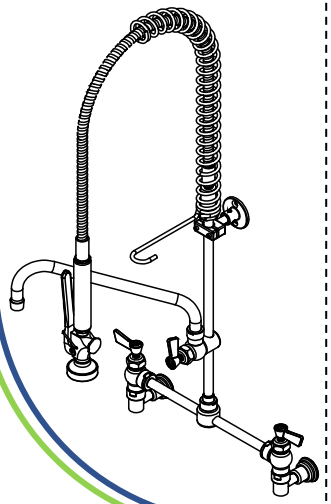

TOP View

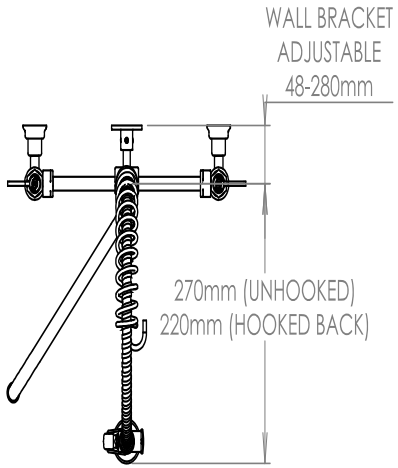

FRONT View

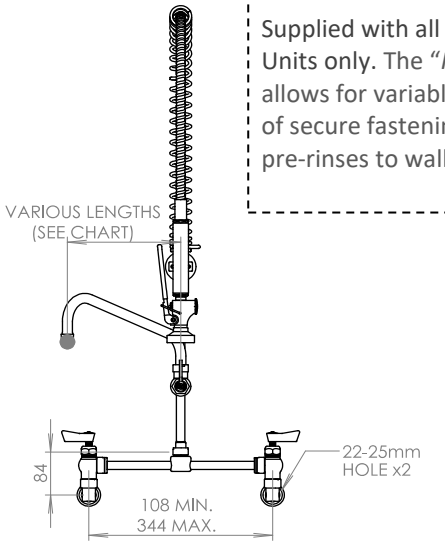

“KNUCKLE” -Sold separately. Pt. no. **G83KL**

Supplied with all ‘RO” Units only. The “*Knuckle*” allows for variable angles of secure fastening of the pre-rinses to wall.





Technical: -

Aust. Standards.	**: Watermarked**
“LEAD FREE”	**Lic. 23008**
WELS Reg. No.	**: TM41651**
1sts Outlet Spray Gun:	
WELS Rated	**: 6 Stars**
Flow Rate	**: 4.5 lpm**
2nd Outlet – SPOUT	**: 9 lpm**
Mounting Hole	**: 25mm x 2**
All Metal Material	**: Polished 304 S/S**
Working Press.	**: 500kpa.** (NPC)
Max. Press. Rate	**: 1500kpa.**
Operating Temp	**: 1 - 80⁰ C.**