
‘Global Fisher™’

WALL OUTLET only – *No Tap*
Pre-Rinses– STANDARD

Made from 304 *STAINLESS STEEL* = Lead Free (LF)

Global Tapware Pty Ltd
E – info.tech@globaltapware.com
P – 07 38 55 2350
P – 1300 85 25 15
W- GLOBALTAPWARE.COM.AU

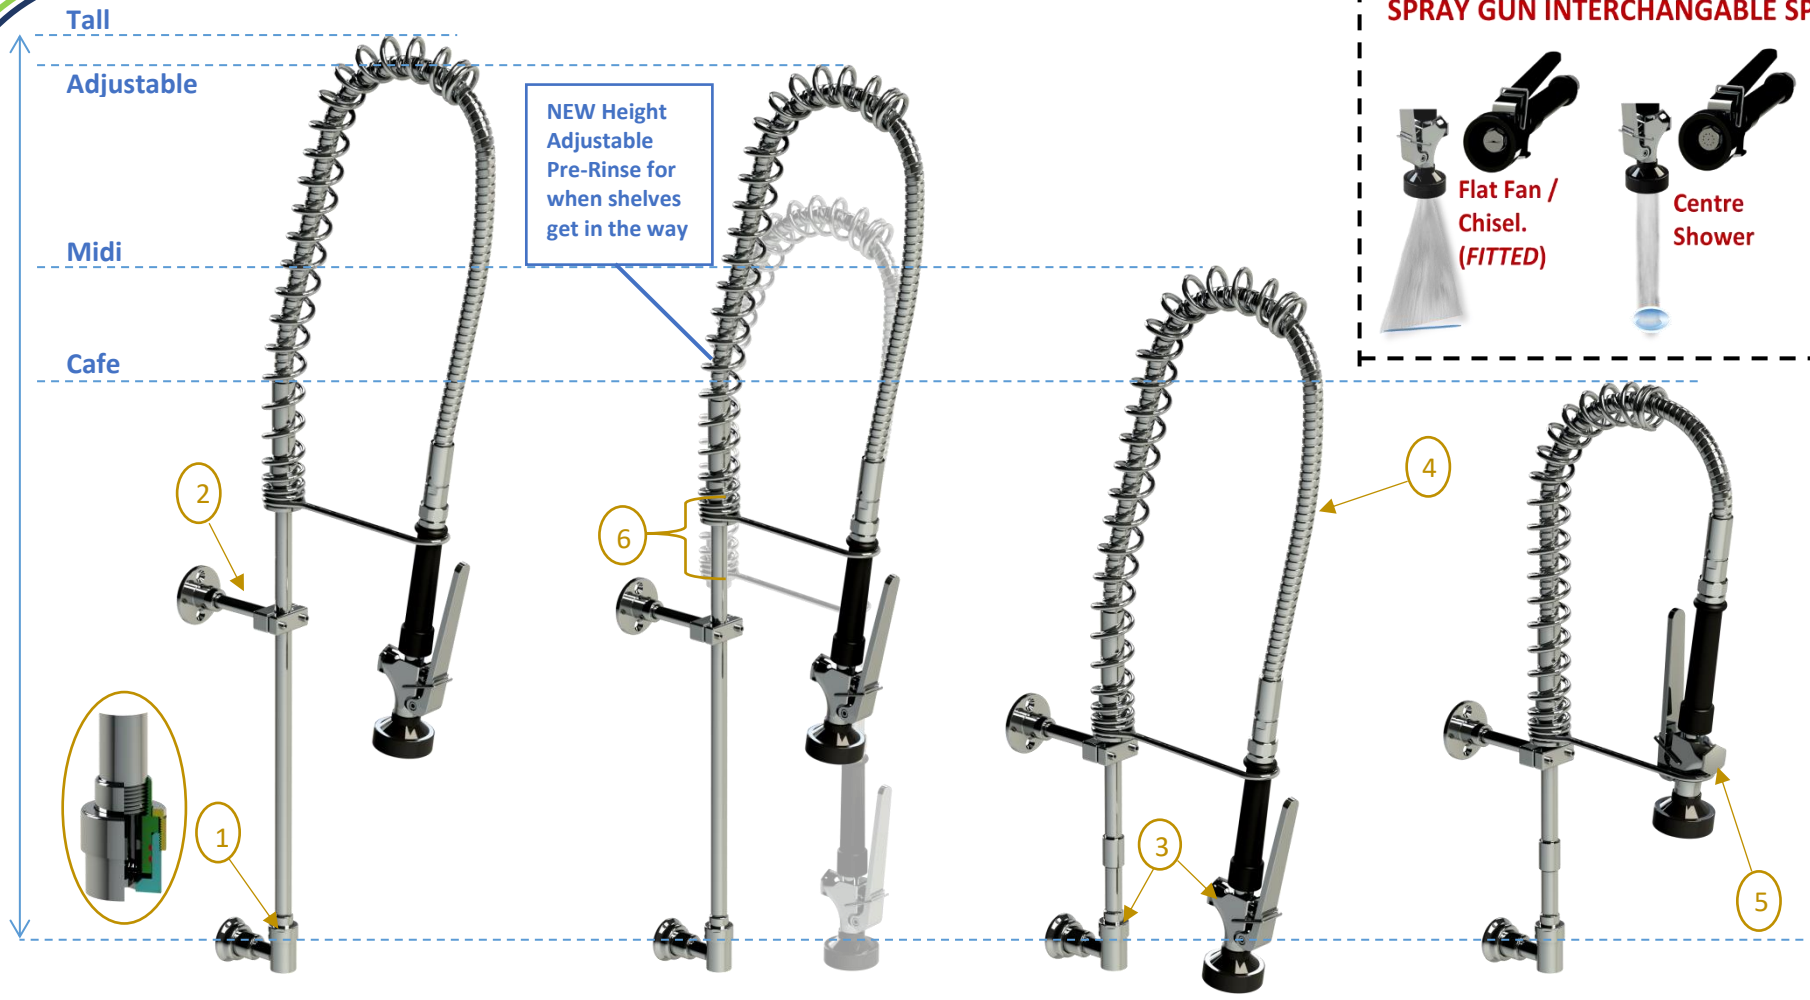

SPRAY GUN INTERCHANGABLE SPRAY TIPS

AS3718
WaterMark
Certificate No: 23008
Global Tapware Pty Ltd

WARRANTY:
36 months from Install date.

WATER RATING
4.5 litres per minute (spray tap)
Licence No. 0308

TALL
Pt. No. GF162100

TALL - Adjustable
Pt. No. GF162100-A

MIDI
Pt. No. GF162100-M

Café
Pt. No. GF162100-C


1. **DROP N LOCK =** fast assembly
2. **Adjustable Wall Bracket.**
3. **Repair Kits AVAILABLE**
4. **S/S Super Tuff Armour-flex w- ½” fi Swivel ends**
5. **Australia’s first Water Saving Spray Gun & still the MOST Reliable on Market.**
6. ***Adjustable Height Spring Retainer.*** The First in the World. Designed & Made in Australia by GT.

NOTE: All Parts are Replaceable Nationally via Plumbing Stores


SINGLE Wall Elbow Only Feed: – HOT or COLD or MIXED

Product must be installed by registered Plumber in accordance with the PCA and AS/NZS3500.


TALL

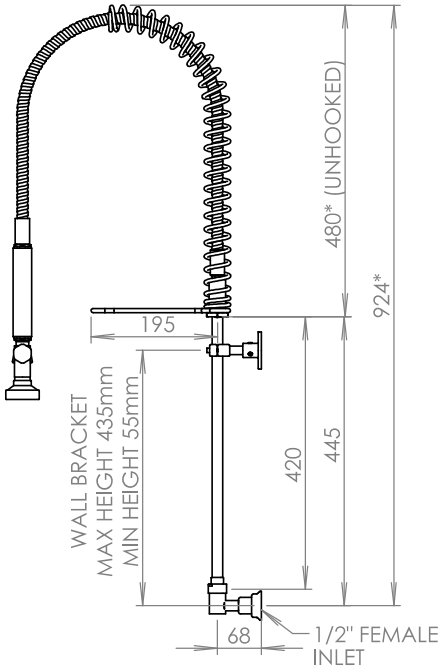


TALL - Adjustable

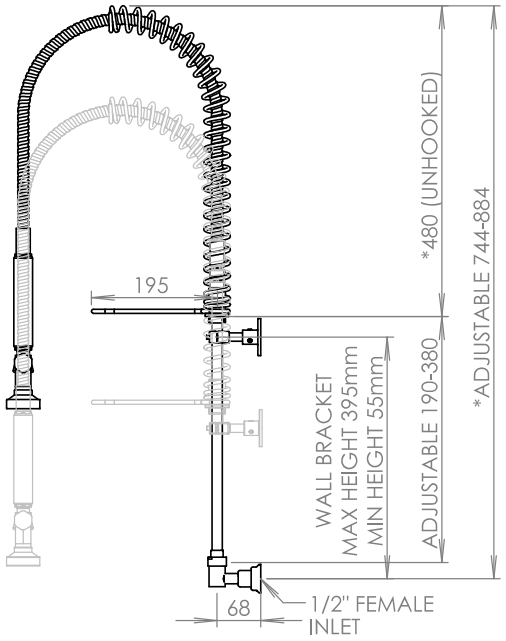


MIDI

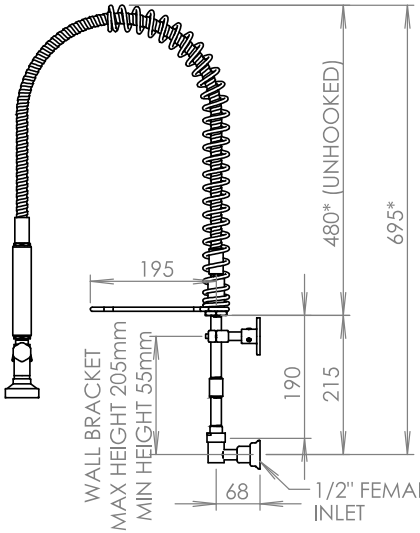


SHORT – Café

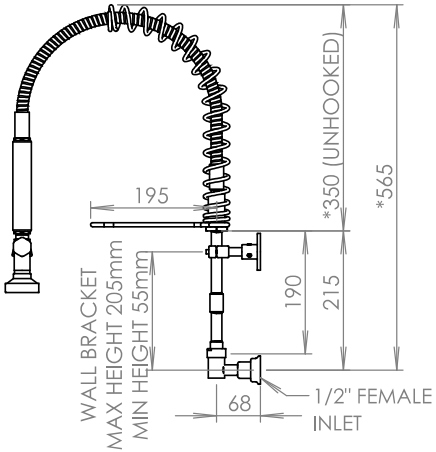


ISOMETRIC View

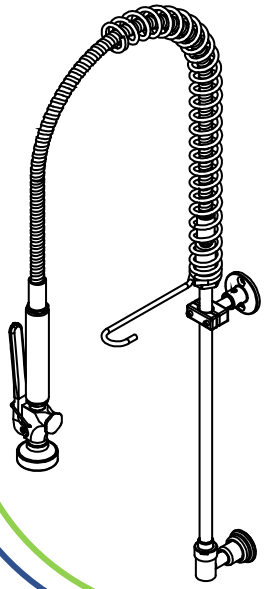

TOP View

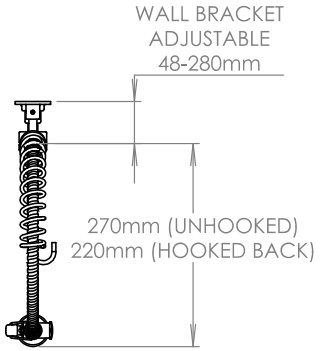

FRONT View

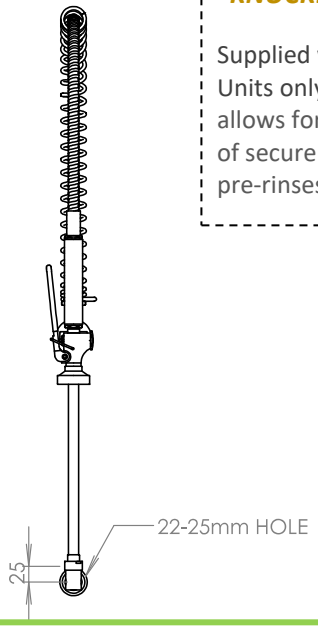

"KNUCKLE" -Sold separately. Pt. no. **G83KL**

Supplied with all 'RO" Units only. The "*Knuckle*" allows for variable angles of secure fastening of the pre-rinses to wall.





Technical: -

Aust. Standards.	**: Watermarked**
"LEAD FREE"	**Lic. 23008**
WELS Reg. No.	**: TM41501**
1sts Outlet Spray Gun:	
WELS Rated	: **6 Stars**
Flow Rate	: **4.5 lpm**
Mounting Hole	: **25mm**
All Metal Material	: **Polished 304 S/S**
Working Press.	: **500kpa.** (NPC)
Max. Press. Rate	: **1500kpa.**
Operating Temp	: **1 - 80⁰ C.**