‘Global Fisher™’

Wall Outlet only Tap Pre-Rinses – POT FILLER

Made from 304 *STAINLESS STEEL* = Lead Free (LF)

Global Tapware Pty Ltd
E – info.tech@globaltapware.com
P – 07 38 55 2350
P – 1300 85 25 15
W- GLOBALTAPWARE.COM.AU

Tall

Adjustable

Midi

Cafe

Supplied with 12” / 300mm S/S Spout.

Other Spout Lengths available – see chart o

NEW Height Adjustable Pre-Rinse for when shelves get in the way

SPRAY GUN INTERCHANGABLE SPRAY TIPS



Flat Fan / Chisel. (*FITTED*)



Centre Shower



RO Water TIP - Low Atomized Shower



AS3718 WaterMark
Certificate No: 23008
Global Tapware Pty Ltd

WARRANTY:
36 months from Install date.

WATER RATING www.waterrating.gov.au 4.5 litres per minute (spray tap) Licence No. 0308

TALL
Pt. No. GF162512

TALL - Adjustable
Pt. No. GF162512-A

MIDI
Pt. No. GF162512-M

Café
Pt. No. GF162512-C

1. **DROP N LOCK =** fast assembly
2. **Adjustable Wall Bracket.**
3. **Repair Kits AVAILABLE**
4. **S/S Super Tuff Armour-flex w- ½” fi Swivel ends**
5. **Australia’s first Water Saving Spray Gun & still the MOST Reliable on Market.**
6. ***Adjustable Height Spring Retainer.*** The First in the World. Designed & Made in Australia by GT.

NOTE: All Parts are Replaceable Nationally via Plumbing Stores


SINGLE OUTLET (No Tap) Feed: – HOT or COLD or Mixed

Products must be installed by registered Plumber in accordance with the PCA and AS/NZS3500.


SPOUT CHART - Tall Model
(applies to the other models w- suffix)

PART No.	MODEL	Length
GF162506	6”	150mm
GF162508	8”	200mm
GF162510	10”	250mm
GF162512	12”	300mm
GF162514	14”	350mm
GF162516	16”	400mm


TALL

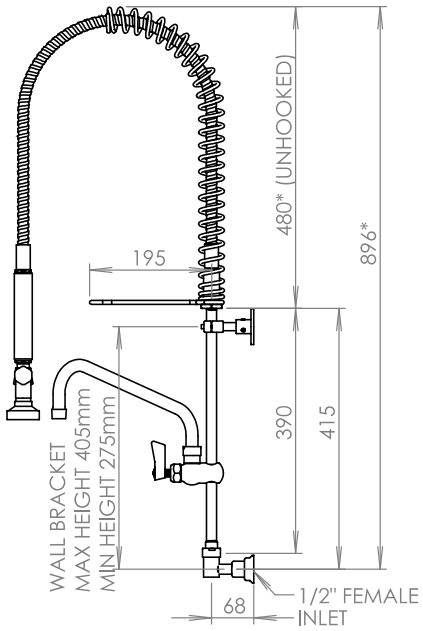


TALL - Adjustable

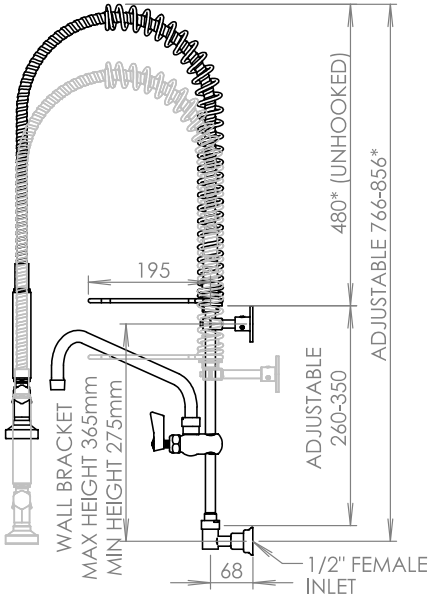


MIDI

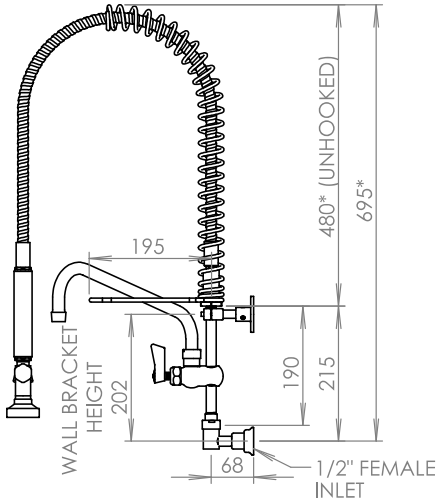


SHORT – Café

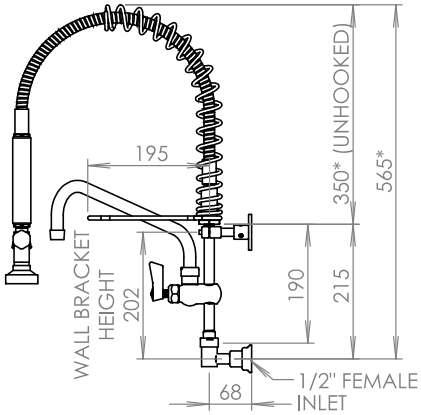


ISOMETRIC View

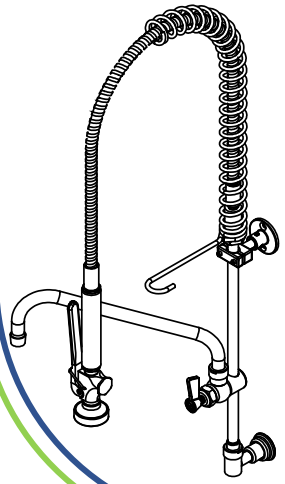

TOP View

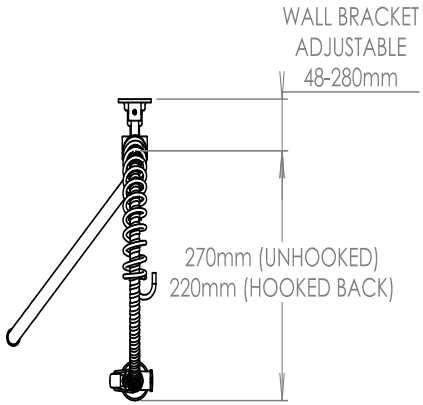

FRONT View

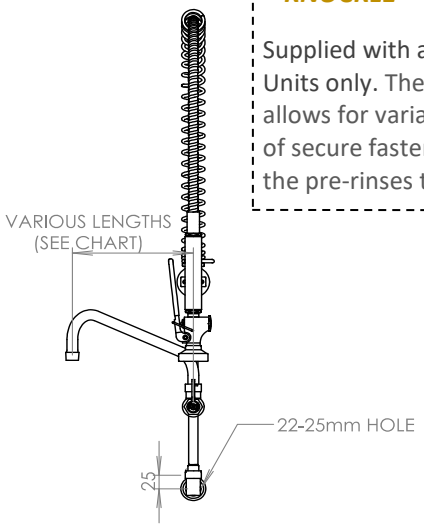

“KNUCKLE” -Sold separately. Pt. no. **G83KL**

Supplied with all ‘RO” Units only. The “*Knuckle*” allows for variable angles of secure fastening of the pre-rinses to wall.



Technical: -

Aust. Standards.	**: Watermarked**
“LEAD FREE”	**Lic. 23008**
WELS Reg. No.	**: TM41650**
1sts Outlet Spray Gun:	
WELS Rated	**: 6 Stars**
Flow Rate	**: 4.5 lpm**
2nd Outlet – SPOUT	**: 9 lpm**
Mounting Hole	: **25mm**
All Meta Material	: **304 Polished S/S**
Working Press.	: **500kpa.** (NPC)
Max. Press. Rate	: **1500kpa.**
Operating Temp	: **1 - 80⁰ C.**