‘Global Accessories™’

New PRE-RINSE HOSE

MULTI-PURPOSE:-

The one PR HOSE to REPLACE most others.

Your ONLY Pre-Rinse HOSE to suit most brands - see back page for list

c/w 1/2” FI Swivels Ends + Adaptors & Nipples

650mm Hose - PT. No. **GPRH0650M** **RRP $_____ + GST**
*920mm Hose - PT. No. **GPRH0900M** **RRP $_____ + GST**
970mm Hose - PT. No. **GPRH0970M** **RRP $_____ + GST**
1000mm Hose - PT. No. **GPRH1000M** **RRP $_____ + GST**
1200mm Hose - PT. No. **GPRH1200M** **RRP $_____ + GST**
1500mm Hose - PT. No. **GPRH1500M** **RRP $_____ + GST**

*** Most Common size**



WaterMark
Certificate No: 23008

(1) - S/S Adaptor:
2 x 7/8 unf Female
x ½” BSP Male

S/S Armourflex Hose w/ S/S Braided Inner Santoprene Tube



S/S Swivel Nut:
½” bsp Female

S/S Ferrule w/
2 x M5 Grub Screws



(2) - S/S Nipples :
1 x ¼” x ½” BSP Male
or
1 x 3/4”unf x ½” BSP



Features:

- Suits Hot & Cold & RO water.
- S/S Braid Inner Santoprene Hose & 304 S/S Components & Armourflex Outer.
- ½” Bsp S/S Swivel Female Ends w/ 3mm thick Fibre washers.
- Will suit most other brands w/ ½” FI
- Hose Assembly Tested to AS4020 & AS3499 = Passed.
- 2 x M5 S/S Grub Screws –Superglued into position per end to lock the outer Armourflex to the inner hose component.
- Range of Lengths available:
  650mm / 920 / 970mm
  *920mm released in July 2021 with all other coming into store during 2021.

WARRANTY:


- 36 Months for Commercial use.
- (As this is a new model, we will keep this warranty period for 2 yrs. then look to increase it as the product proves itself.)
- Warranty DOES NOT cover Wear & Tear, Abuse, Over Stretching, incorrectly installed.


This Hose suits:
Global FISHER & Global Rinse-Mate, Enware, Galvin, 3MKZ, T&S, Encore & any other Pre-Rinse hose using either ½” bsp or 7/8-fine thread Female Ends, plus other brands with Spring Opening i.d. of 28mm.


It will Not suit:
Gentec, Wolfen, some other Single Lever, domestic type pre-rinse, that use a small i.d. Spring Guard & braided hose, even if it states it is Commercial.

Global Tapware Pty Ltd
E – info.tech@globaltapware.com
P – 07 38 55 2350
P – 1300 85 25 15
W- **GLOBALTAPWARE.COM.AU**

V1b.4.26

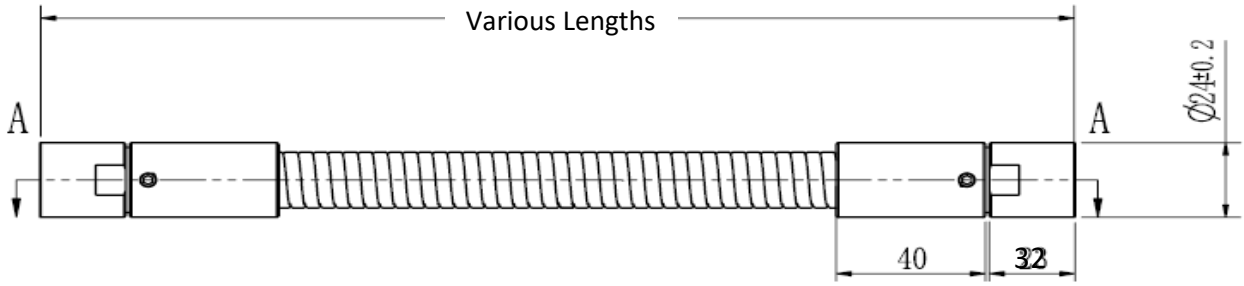

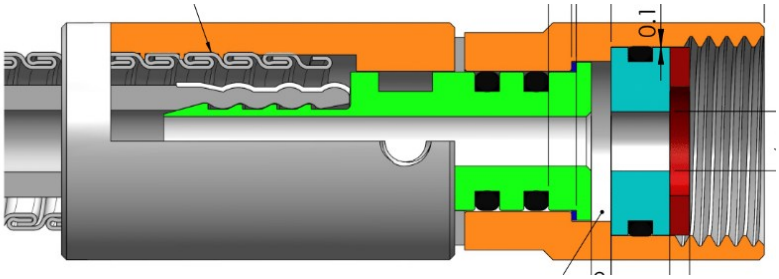

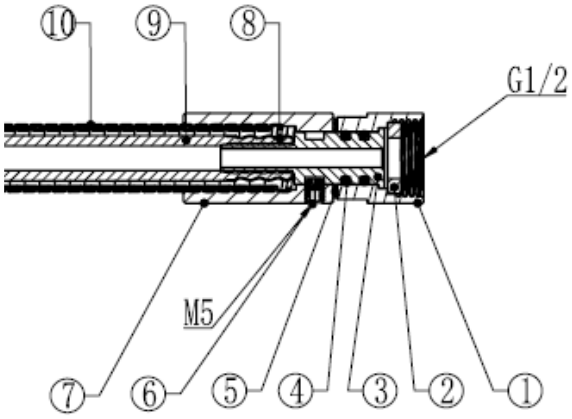

Item	Description	Qty
1	SS304 ½" Swivel Nut	2
2	Fibre Washer - 3mm	2
3	SS304 Tail Piece	2
4	NBR O'Rings	4
5	PTEF spacer – 1mm	2
6	SS304 M5 Grub Screw	4
7	SS304 Outer Ferrule	2
8	SS304 Inner Ferrule	2
9	SS304 Braid Santoprene Tube	1
10	SS304 Armourflex Outer	1

Technical:-

Australian Standards :
Has been fully tested and compliant to AS4020 & AS3499.

Material :
304 Stainless Steel fittings, Braid & Armourflex. w/ Santoprene Inner Tube.

O.D. & Length of Nut & Ferrule:
24mm o.d. x 64mm long

Rec'd Working Press. : 500kpa. (NPC)
Max. Press. rate : 1500kpa.
Operating Temp : 1 - 80^0 C.

WaterMark
Certificate No: 23008