‘Global Accessories™’

New PRE-RINSE HOSE

SINGLE PURPOSE: -

suit applications requiring ½” Female ends.

½” FI Swivels Ends

650mm Hose - PT. No. **GPRH0650S** **RRP $_____ + GST**
730mm Hose - PT. No. **GPRH0750S** **RRP $_____ + GST**
* 920mm Hose - PT. No. **GPRH0900S** **RRP $_____ + GST**
970mm Hose - PT. No. **GPRH0970S** **RRP $_____ + GST**
1000mm Hose - PT. No. **GPRH1000S** **RRP $_____ + GST**
1200mm Hose - PT. No. **GPRH1200S** **RRP $_____ + GST**
1500mm Hose - PT. No. **GPRH1500S** **RRP $_____ + GST**
2000mm Hose - PT. No. **GPRH2000S** **RRP $_____ + GST**
3000mm Hose - PT. No. **GPRH3000S** **RRP $_____ + GST**

*** - Most popular size.**



WaterMark
Certificate No: 23008



Features:

- Suits Hot & Cold & RO water.
- S/S Braid Inner Santoprene Hose & 304 S/S Components & Armourflex Outer.
- ½” Bsp S/S Swivel Female Ends w/ 3mm thick Fibre washers.
- Will suit most other brands w/ ½” FI connections
- Hose Assembly Tested to AS4020* & AS3499 = Passed.
  * **FOOD GRADE** compliant.
- 2 x M5 S/S Grub Screws –Superglued into position per end to lock the outer Armourflex to the inner hose component.
- Range of Lengths available:
  650mm / 750mm / 920mm / 970mm / 1mt / 1.5mt / 2mt / 3mt

✓ **WATERMARKED**

WARRANTY:

- 36 Months for Commercial use.
- (As this is a new model, we will keep this warranty period for 2 yrs. then look to increase it as the product proves itself.)
- Warranty DOES NOT cover Wear & Tear, Abuse, Over Stretching, incorrectly installed.

Don’t buy Nylon or Heat Shrink covered Hoses, nor Hydraulic looking hose, just buy the BEST Pre-Rinse Hose on the Market – OURS.

This Hose suits:
Global Rinse-Mate, Enware, Galvin, 3MKZ, any other pre-rinse hose using ½” BSP Female Ends, that can fit through 28mm i.d. Spring.


It will Not suit:
Gentec, Wolfen or most other Single Lever, domestic type pre-rinse, that use a small i.d. Spring Guard & a braided hose, even if it states it is Commercial.


For those hoses we offer another type / style.


Global Tapware Pty Ltd
E – info.tech@globaltapware.com
P – 07 38 55 2350
P – 1300 85 25 15
W- **GLOBALTAPWARE.COM.AU**

Will Suit:-
Global Rinse-mate, Enware, Galvin, 3Monkeez, Other brands that use ½" female Nut w- a spring i.d. of 28mm

Will NOT suit:-
Gentec, Wolfen, other domestic units with a small i.d. Spring

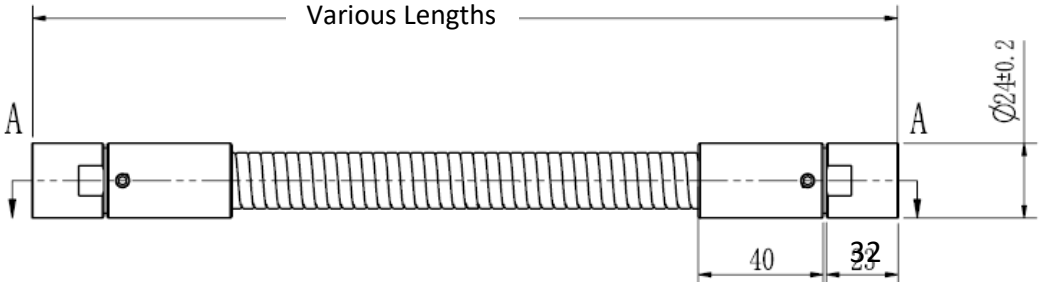

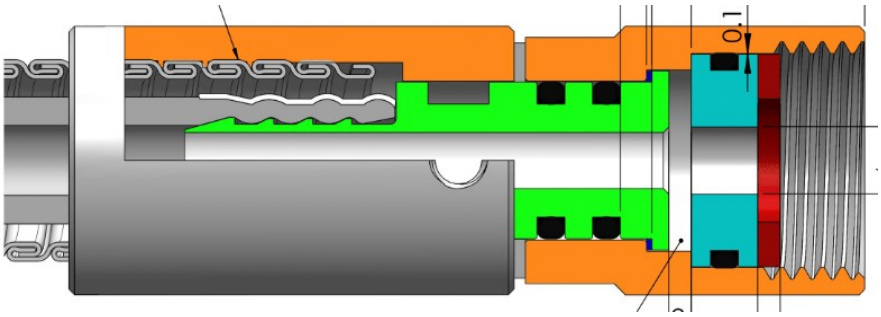

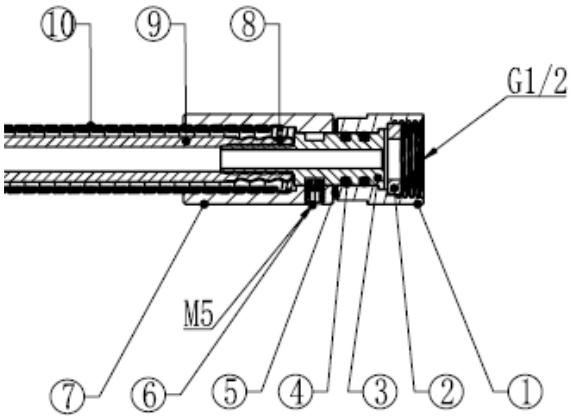

Item	Description	Qty
1	SS304 ½" Swivel Nut	2
2	Fibre Washer – 3mm	2
3	SS304 Tail Piece	2
4	NBR O'Rings	4
5	PTEF spacer – 1mm	2
6	SS304 M5 Grub Screw	4
7	SS304 Outer Ferrule	2
8	SS304 Inner Ferrule	2
9	SS304 Braid Santoprene Tube	1
10	SS304 Armourflex Outer	1

Technical: -

Australian Standards:
Fully tested and compliant to AS4020 & AS3499.
* **Watermarked**

Material:
304 Stainless Steel fittings, Armourflex. w/ Santoprene Inner S/S Braided Tube (Food Grade).

O.D. & Length of Nut & Ferrule:
24mm x 64mm

Rec'd Working Press. : 500kpa. (NPC)
Max. Press. rate : 1500kpa.
Operating Temp : 1 - 80^0 C.

WaterMark
Certificate No: 23008