‘Global Accessories™’
UNIVERSAL PRE-RINSE HOSE
Hose & Gun Handle: -
suit Fisher + Rinse-Mate, T&S, Encore, Enware, 3Mkz, Galvin, Other

Your ONLY Pre-Rinse HOSE to suit all various brands of hose configurations
[c/w ½” FI Swivels Ends + Adaptors]

*920mm Hose - PT. No. **GPRH0900U** **RRP $_____ + GST**
Other lengths available upon request

WaterMark
Certificate No: 23008



O/A HOSE Length = **920mm**

½” Swivel Female Nut – Suit Enware, etc



7/8 FI Adaptors to suit T&S or Encore, etc





2 Nipples To suit Fisher & Handle to suit Fisher, Rinse-Mate + Others



Features:

- Suits Hot & Cold & RO water.
- S/S Braid Inner Santoprene Hose & 304 S/S Components & Armourflex Outer.
- ½” Bsp S/S Swivel Female Ends w/ 3mm thick Fibre washers.
- Hose Assembly Tested to AS4020 & AS3499 = Passed.
- 2 x M5 S/S Grub Screws –Superglued into position per end to lock the outer Armourflex to the inner hose component.
- New Style of Hose acts as an excellent Fisher Hose substitute.

WARRANTY:

- 36 Months for Commercial use.
  (As this is a new model, we will keep this warranty period for 2 yrs, then look to increase it as the product proves itself.)
  Warranty DOES NOT cover Wear & Tear, Abuse, Over Stretching, incorrectly installed.

This is the Most VERSATILE Pre-Rinse Hose on the Market.


This Hose suits:
Global Fisher & Global Rinse-Mate, Enware, Galvin, 3MKZ, T& S, Encore& any other Pre-Rinse hose using ½” bsp or 7/8-fine thread Female Ends, other brands that have a 28mm i.d. Spring Guard


It will Not suit:
Gentec, Wolfen, most other Single Lever, domestic type Pre-rinse, that use a small i.d. Spring Guard & braided hose, even if it states it is Commercial.


For those hoses we offer another type / style.

Global Tapware Pty Ltd
E – info.tech@globaltapware.com
P – 07 38 55 2350
P – 1300 85 25 15
W- **GLOBALTAPWARE.COM.AU**

V1b .21.4.26

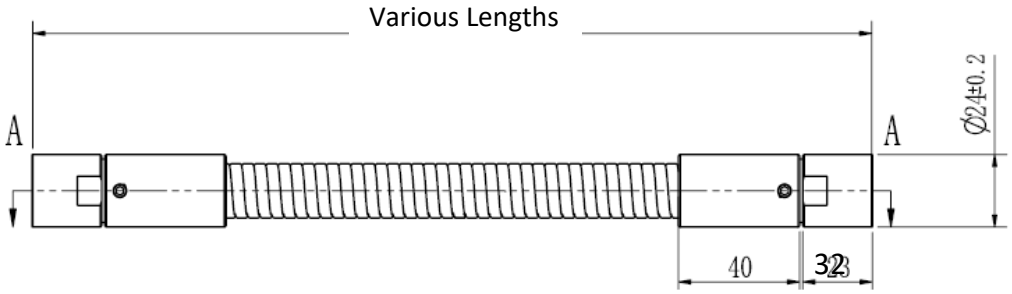

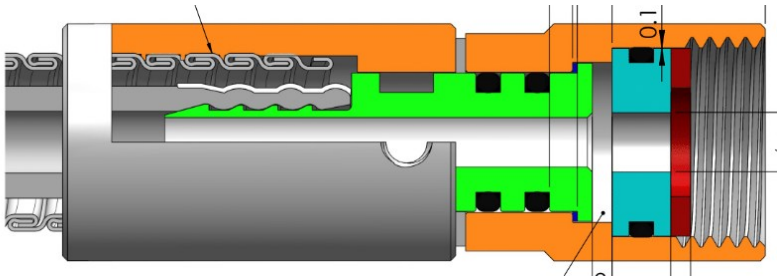

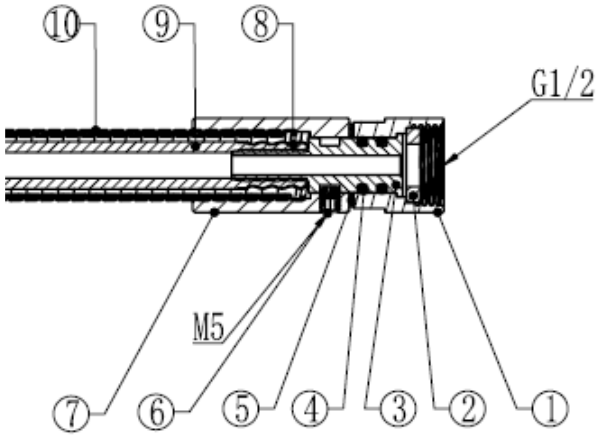

Item	Description	Qty
1	SS304 Swivel Nut	2
2	Fibre Washer	2
3	SS304 Tail Piece	2
4	NBR O'Rings	4
5	PTEF spacer -1mm	2
6	SS304 M5 Grub Screw	4
7	SS304 Outer Ferrule	2
8	SS304 Inner Ferrule	2
9	SS304 Braid Santoprene Tube	1
10	SS304 Armourflex Outer	1

Technical:-

Australian Standards :

Has been fully tested and compliant to AS4020 & AS3499.

Material :

304 Stainless Steel fittings, Braid & Armourflex. w/ Santoprene Inner Tube.

O.D. & Length of Nut & Ferrule:

23mm o.d. x 64mm long

Rec'd Working Press. : 500kpa. (NPC)
Max. Press. rate : 1500kpa.
Operating Temp : 1 - 80^0 C.

WaterMark
Certificate No: 23008